REV	DESCRIPTION	DATE	BY
P1	First issue	2026-09-30	AC
P2	Frame 22 mm taller for the larger molds (DDR-006)	2026-10-23	AC

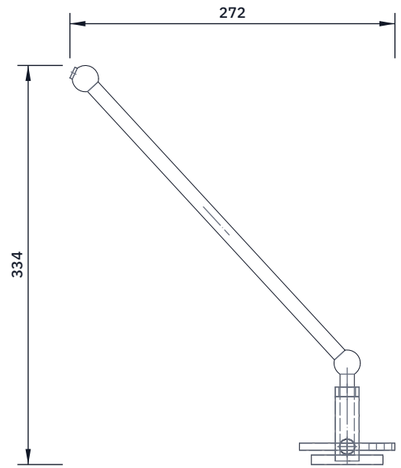

TOP VIEW

Scale 1:5; looking down (along -Z)

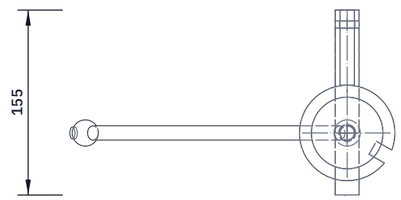

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

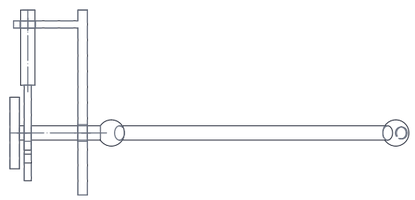

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

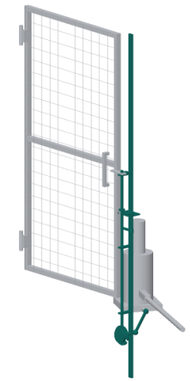

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Release shaft: a coupling that fits the jack's release screw, a 12 mm shaft out to the right front with two universal joints, then straight forward through the guard to a 60 mm knob outside.
Lock disc: 80 mm dia x 6 mm on the shaft just behind the knob, with one notch 12.5 wide x 15.5 deep, 120 degrees round from the top (check the angle against the jack you buy: open about 1/3 turn).
Post: 20 x 8 mm flat bar from 60 to 1,473 mm up, bolted to the right front strip frame, 330 mm right of the middle, with guide tabs.
Lock rod: 12 mm bar standing on the disc rim, a lift handle at 680 mm and a 24 mm collar. Valve open: the rod drops 15 mm into the notch.
Gate slider: rides over the rod top when the gate is open; the closing gate tongue pushes it back. Pin slider: blocks the collar until the pin-presence plunger pulls it aside by its cable.
Result: the valve closes only with the gate shut and the pin home; with the valve closed the rod stands through the gate tongue.
Views: the lower end only; the upper end is in the gate joint picture.

POTPRESS github.com/BoujeeEnjinia1701/potpress

PotPress gate and pin interlock round the jack release: making sketch

DRAWING NO.	REV	SHEET	SIZE
PPR-DWG-112	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-23	Amish Chadha

MATERIAL / NOTES

12 mm bar, 20 x 8 flat bar, 6 mm plate, bought universal joints

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand