HELIOS PI - RGB LEVEL SHIFTER PINOUT

74AHCT125 Based Level Shifter

Product Information: https://uuinc.co/p/helios/pi

I2C INPUT


GROUND	GND	1
PI 3V3	3V3	2
I2C	SDA	3
I2C	SCL	4


LED DC INPUT

GROUND	GND	5
5-24VDC	LEDPWR	6

PI HEADER

TOP

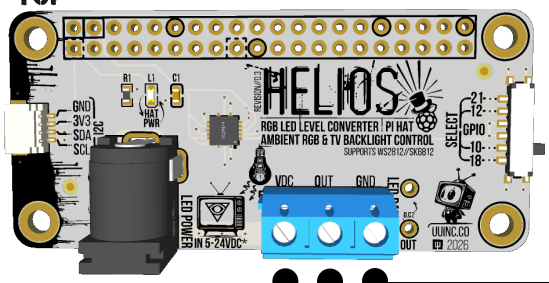

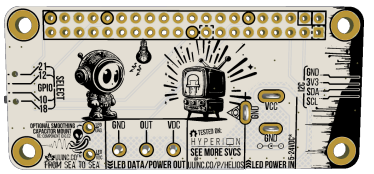

BACK

GPIO SELECT

X	GPIO	SELECT

LED OUTPUT

7	GND	GROUND
8	OUT	LED DATA
9	VDC	LED PWR

LEGEND

- POWER
- GROUND
- DATA
- SWITCH

INFO

LEDPWR Voltages: 5Vdc - 24Vdc
Barrel Jack Size: 5.5mm [ID] x 2.1mm [OD]
Main Chip: SN74AHCT125RGYR
Device Info:
The SN74AHCT125RGYR is a quad buffer/line driver specifically designed to interface between different voltage domains, most commonly acting as a 3.3V to 5V logic level shifter. It is highly regarded for converting 3V microcontroller logic (like Raspberry Pi or Teensy) to 5V device logic (like NeoPixels/WS2812B/SK6812 LEDs).
Just select your GPIO between 10,12,18,21 and you're off to RGB Island!
Tested with: WS2812[b,c,d], WS2811, SK6812, WS2813, WS2815, TM1814 but sure to compatible with more! Contact us if you're unsure if your RGB Led's are supported.

OPEN SOURCE DESIGN
open source hardware
UUINC.CO