HELIOS PI - RGB LOGIC LEVEL SHIFTER PINOUT

74AHCT125 Based Level Shifter

open source hardware

Product Information: https://uurnd.com/p/helios-rgbled-pihat

I2C INPUT


GROUND	GND	1
PI 3V3	3V3	2
I2C	SDA	3
I2C	SCL	4

LED DC INPUT

GROUND	GND	5
5-24VDC	LEDPWR	6

TOP

PI HEADER

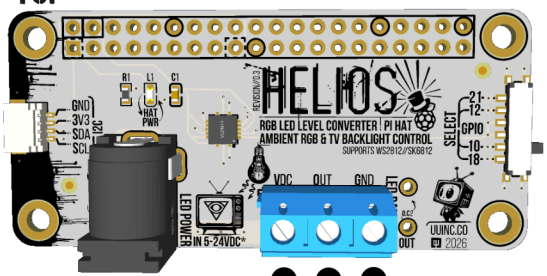


GPIO SELECT

X	GPIO	SELECT

LED OUTPUT

7	GND	GROUND
8	OUT	LED DATA
9	VDC	LED PWR

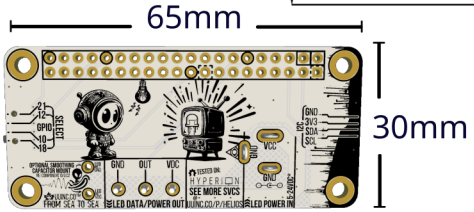

BACK

LEGEND

- POWER
- GROUND
- DATA
- SWITCH

INFO

LEDPWR Voltages: 2-24VDC
Main Chip: SN74AHCT125RGYR
Device Info:
The SN74AHCT125RGYR is a quad buffer/line driver specifically designed to interface between different voltage domains, most commonly acting as a
3.3V to 5V logic level shifter. It is highly regarded for converting 3V microcontroller logic (like Raspberry Pi or Teensy) to 5V device logic (like NeoPixels/WS2812B/SK6812 LEDs)



UURND.COM