



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the TRL 3 model (PPR-CAL-001)	2026-09-25	AC

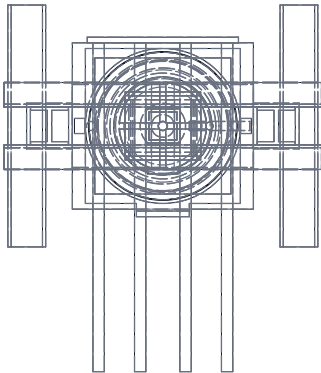


TOP VIEW
Scale 1:20

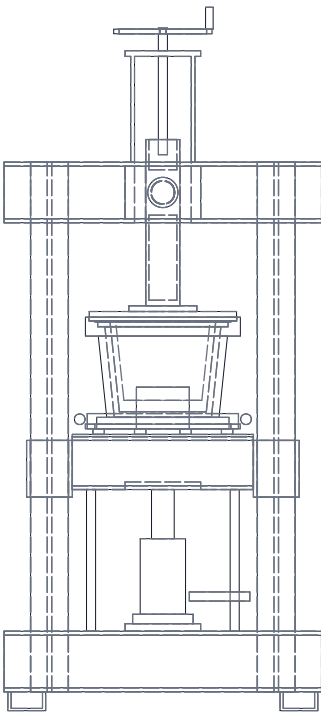

FRONT VIEW
Scale 1:20

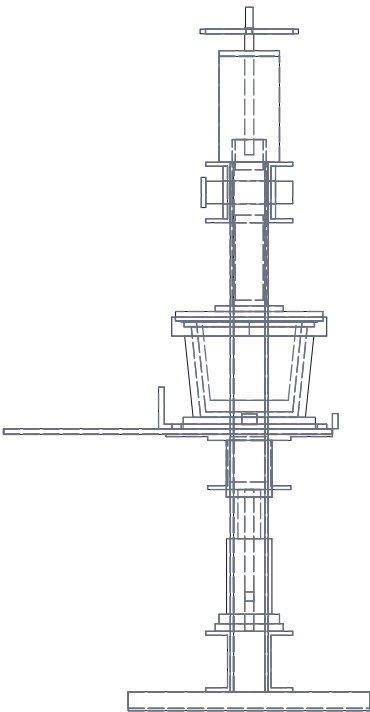

RIGHT VIEW
Scale 1:20

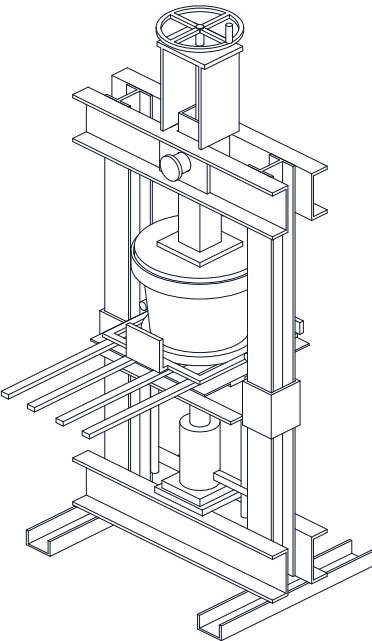

ISOMETRIC VIEW
Not to scale; guards not shown

KEY DIMENSIONS (MM) AND DATA

Frame 840 x 640 on feet; rails to 650 in front of axis
Height 1806 to handwheel; loading rim height 921
Uprights at 600 centers; beams 2 x UPN160, gap 100
Top beam 1291 to 1451; load pin 60 dia at 1371
20 t jack, stroke 150; pressing travel 110
Crank lift 200 (Tr24 x 5, 40 turns); open gap 70
Pot: inner rim 280, depth 240, wall 15, rim 345
Female mold 410 dia; male flange 390 in lip, fit 0.1
Frame stress 190 MPa, pin 258 MPa at 294 kN
Mold gap deflection 0.6 mm at 10 t, 1.8 mm at 30 t
Press about 298 kg; heaviest part as handled 39 kg
Not met at TRL 3: R3 deflection, R10 cost, R11 rack
Pin fully home before pressing; guards required
PRELIMINARY, NOT FOR FABRICATION

POTPRESS

General arrangement, press closed

DRAWING NO. PPR-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES S275 channel and plate; molds cast Al-Si (lead-free scrap); pin 42CrMo4 QT. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com					Generated from cad/src; do not edit by hand