



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA, SwapCell interface v0.3 (PBX-CAL-001)	2026-09-25	AC

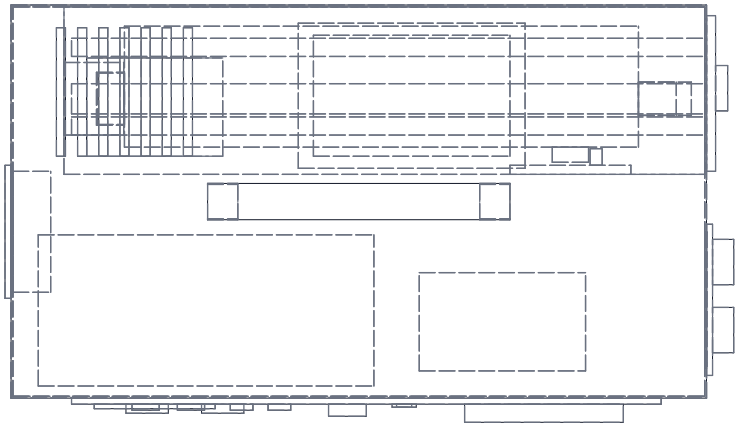


TOP VIEW
Scale 1:5

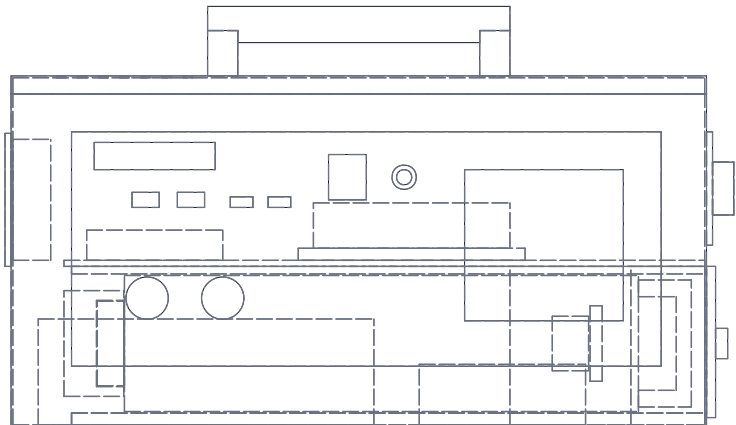

FRONT VIEW
Scale 1:5

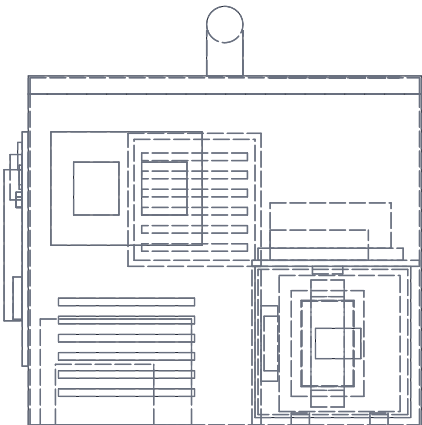

RIGHT VIEW
Scale 1:5

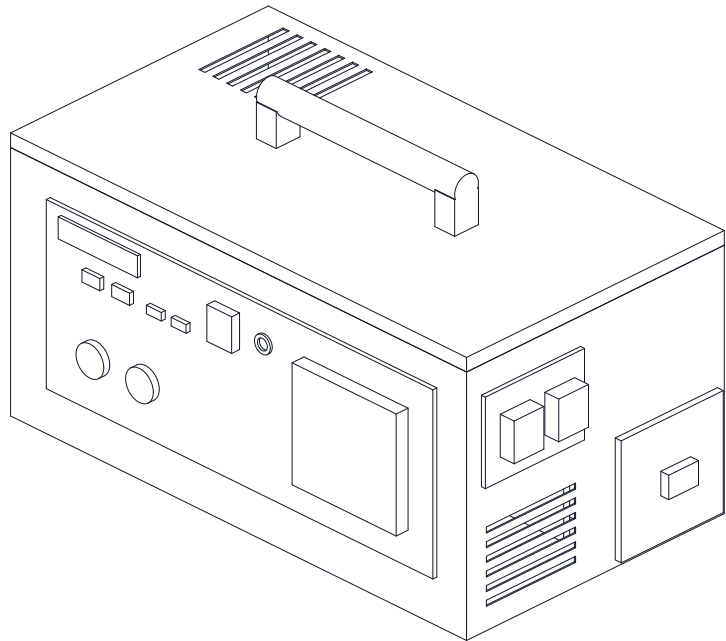

ISOMETRIC VIEW
Not to scale

KEY DIMENSIONS AND INTERFACES (MM)

Body 460 x 260 x 220; overall 482 x 276 x 278
Sheet 1.2 Al; lid skirt 12; handle span 200
Pack bay: SwapCell interface v0.3, pack 340 x 90 x 80, 393 overall; inserted from +X end, connector first
Guide clearance 1 per side; latch catch class D
Receptacle: floating mount, 10 kOhm INTERLOCK coding resistor (v0.3 item W); 120 ohm CAN termination
Station host type 3, mode 4 charge-discharge, 5.0 A max
Front: USB-C 100 + 60 W, 2 x USB-A, 2 x 12 V, 230 V RCD
+X end: DC in 12 to 60 V 200 W, charger in 54.6 V 5 A
Main fuse 30 A, inverter breaker 20 A (PBX-CAL-001)
Mass about 8.6 kg with pack
PRELIMINARY, NOT FOR FABRICATION

POWERBOX

General arrangement, SwapCell station

DRAWING NO. PBX-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Case, lid, door: 1.2 mm 5052 Al; bay runners printed. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com				Generated from cad/src; do not edit by hand	