

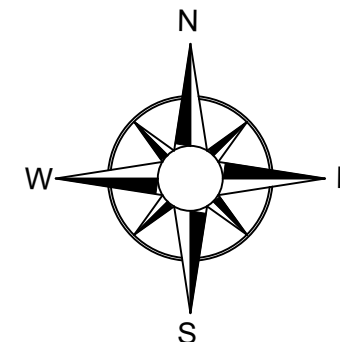


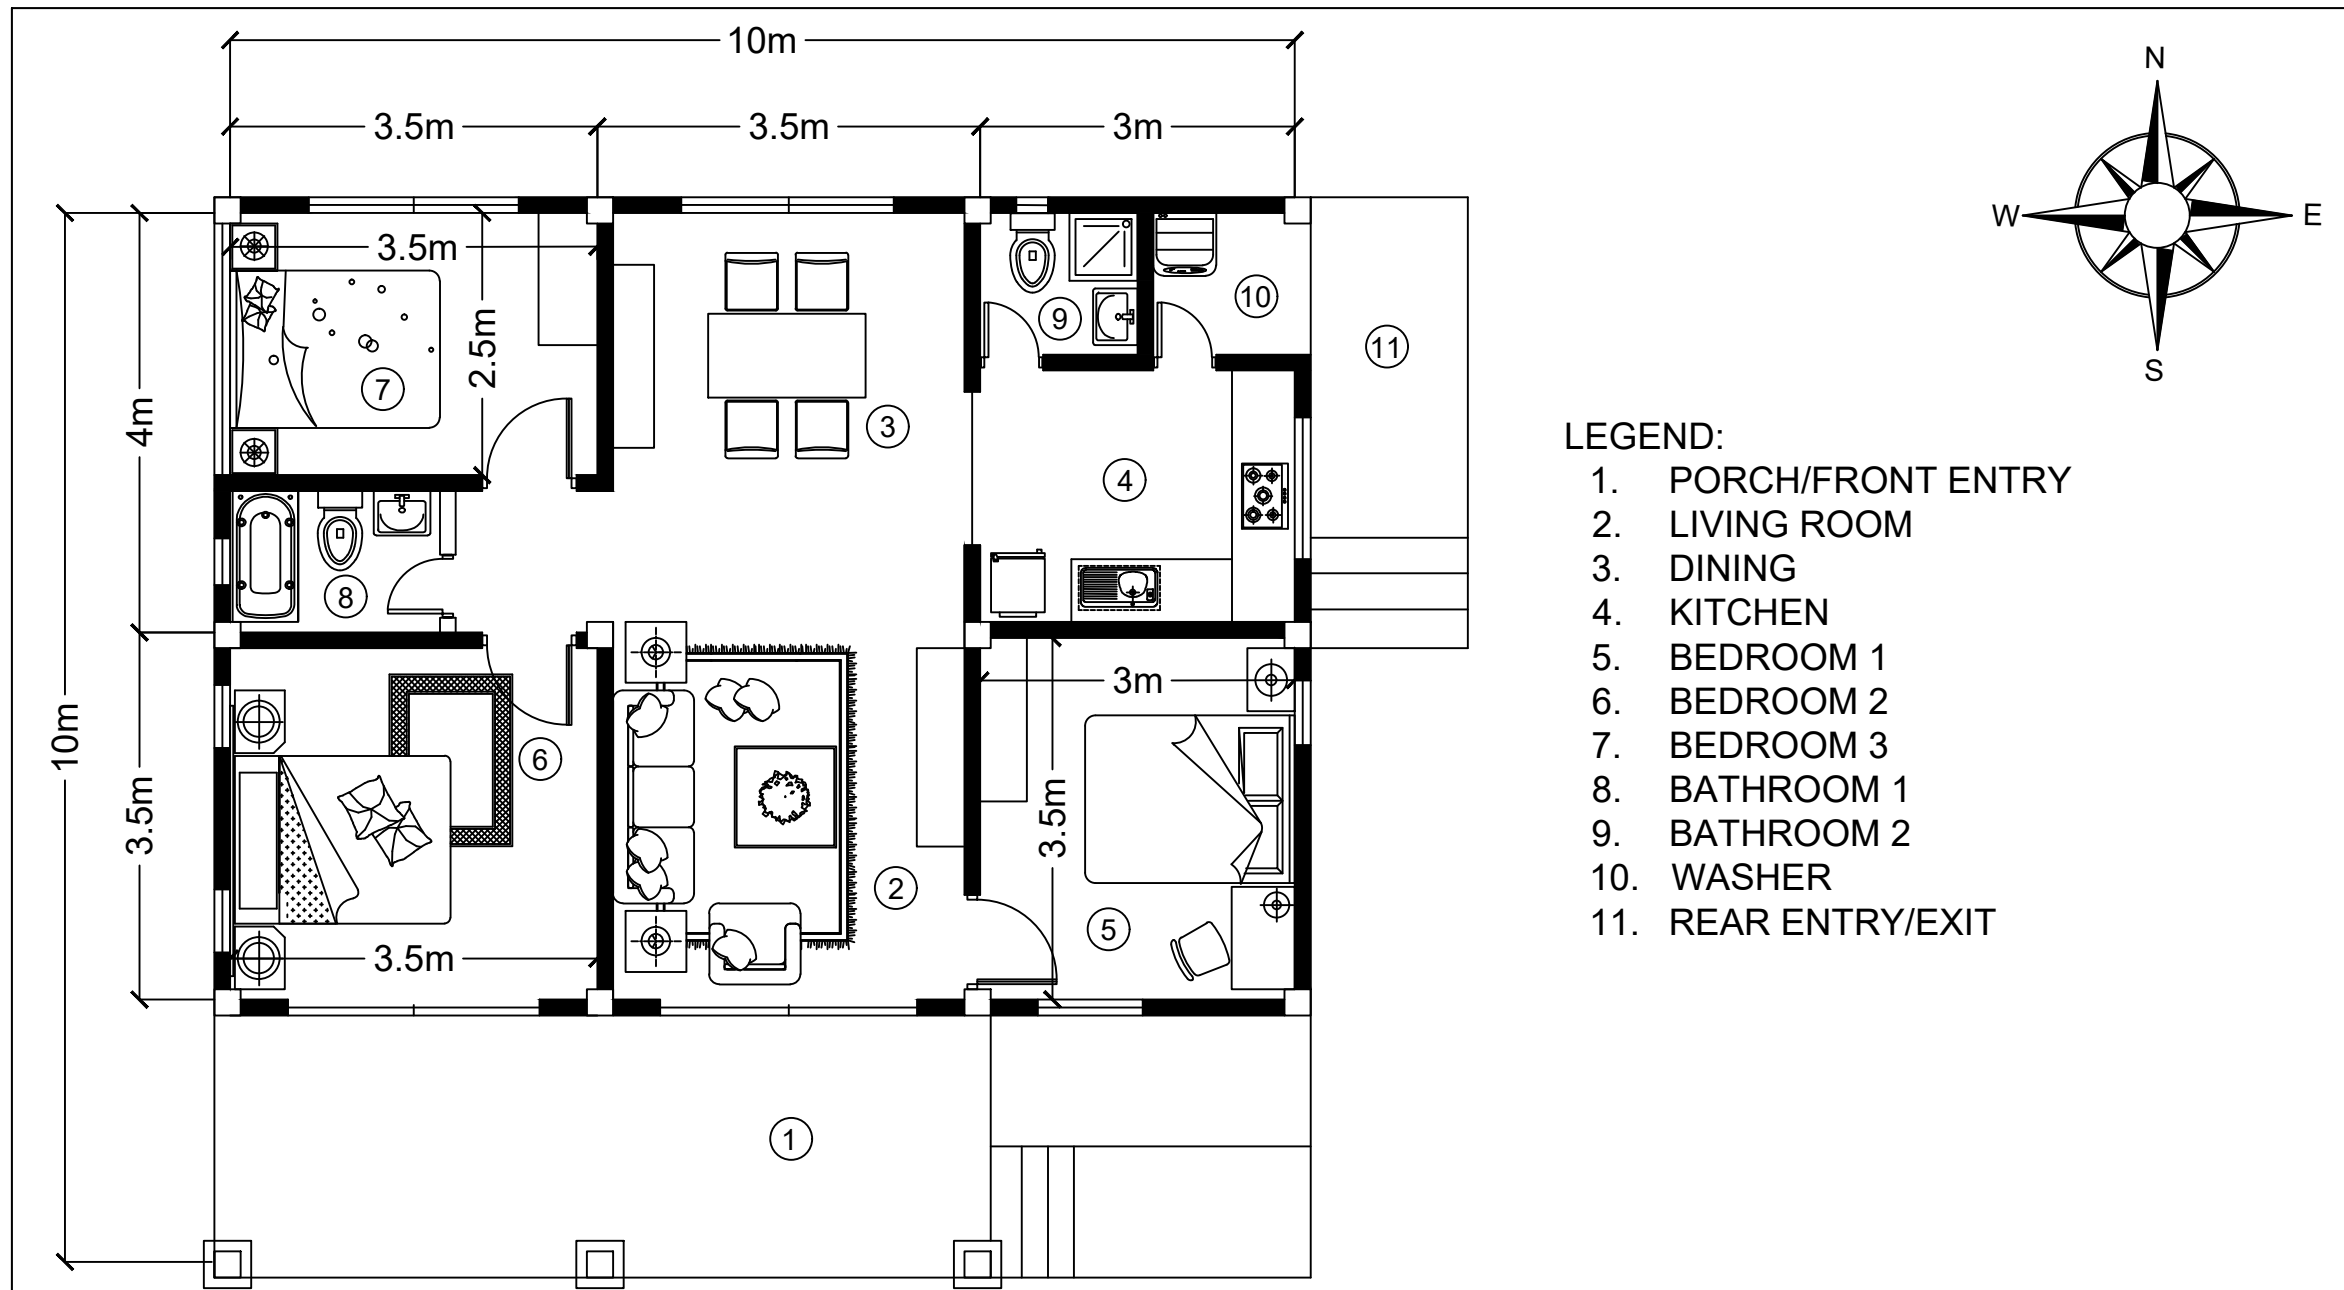


LEGEND:

1. PORCH/FRONT ENTRY
2. LIVING ROOM
3. DINING
4. KITCHEN
5. BEDROOM 1
6. BEDROOM 2
7. BEDROOM 3
8. BATHROOM 1
9. BATHROOM 2
10. WASHER
11. REAR ENTRY/EXIT

SCHOOL NAME:	COURSE TITLE:	PROJECT TITLE:	SUBMITTED BY:	SUBMITTED TO:	SHEET CONTENT:	GRADE:
 DR. EMILIO B. ESPINOSA SR. MEMORIAL STATE COLLEGE OF AGRICULTURE AND TECHNOLOGY	EE412 - ELECTRICAL SYSTEMS AND ILLUMINATION ENGINEERING DESIGN	SINGLE FAMILY DWELLING FLOOR PLAN	BLADEMIR P. RUBIA BSEE - 4	ENGR. CHRIS JAY D. DIONG-AN INSTRUCTOR	E 1 5	

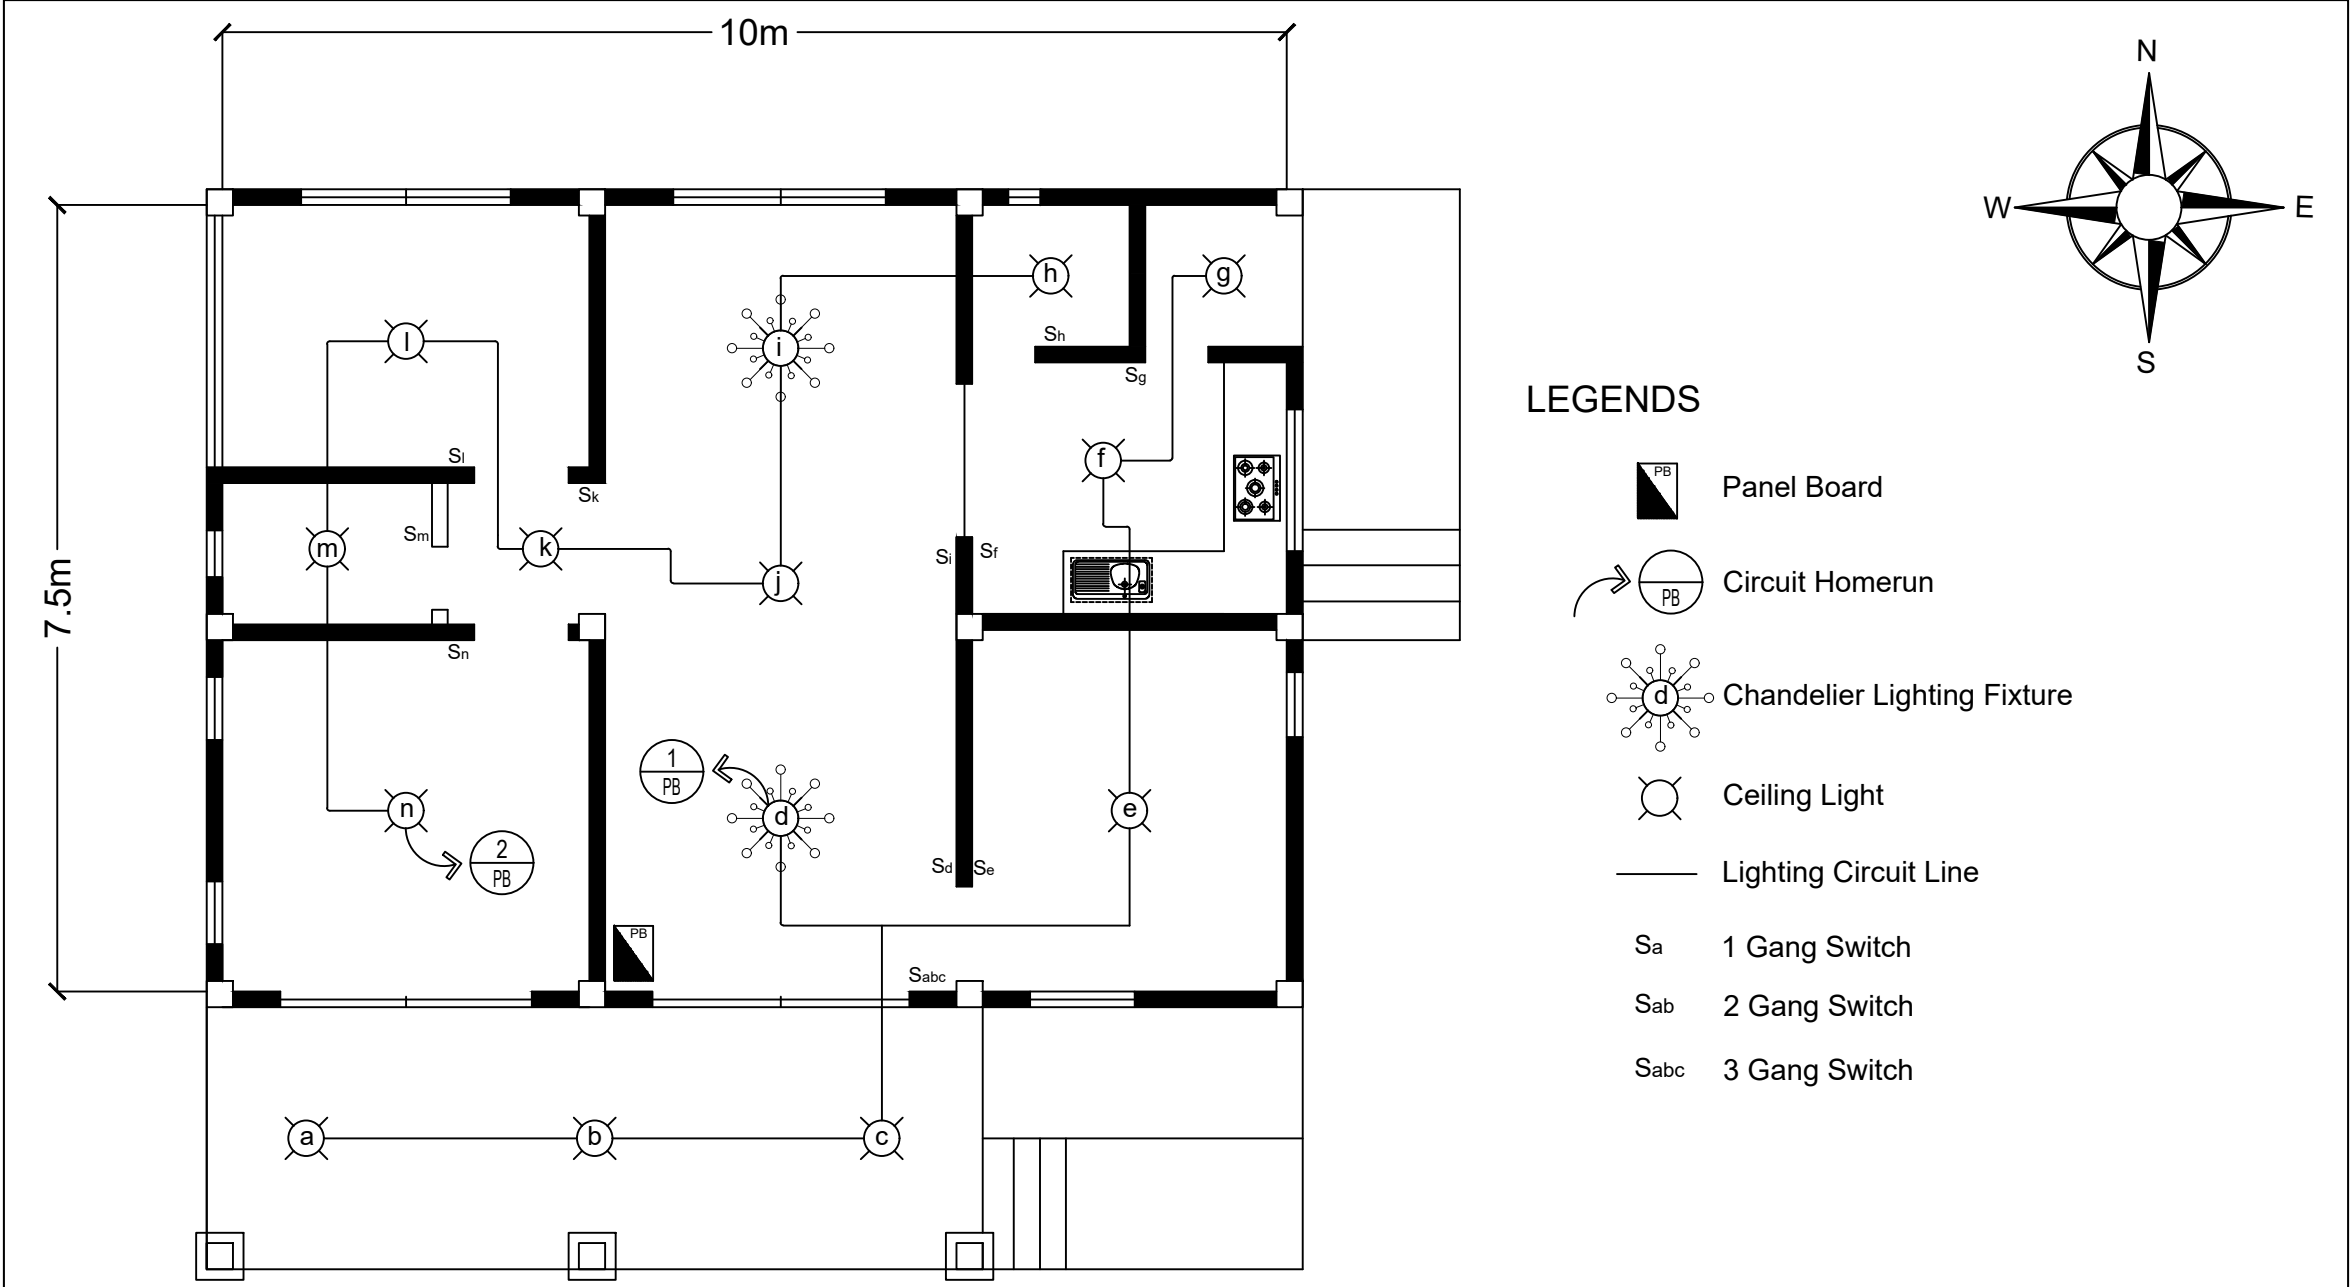


SCHOOL NAME:	COURSE TITLE:	PROJECT TITLE:	SUBMITTED BY:	SUBMITTED TO:	SHEET CONTENT:	GRADE:
 DR. EMILIO B. ESPINOSA SR. MEMORIAL STATE COLLEGE OF AGRICULTURE AND TECHNOLOGY	EE412 - ELECTRICAL SYSTEMS AND ILLUMINATION ENGINEERING DESIGN	SINGLE FAMILY DWELLING LIGHTING LAYOUT	BLADEMIR P. RUBIA BSEE - 4	ENGR. CHRIS JAY D. DIONG-AN INSTRUCTOR	E 2 5	

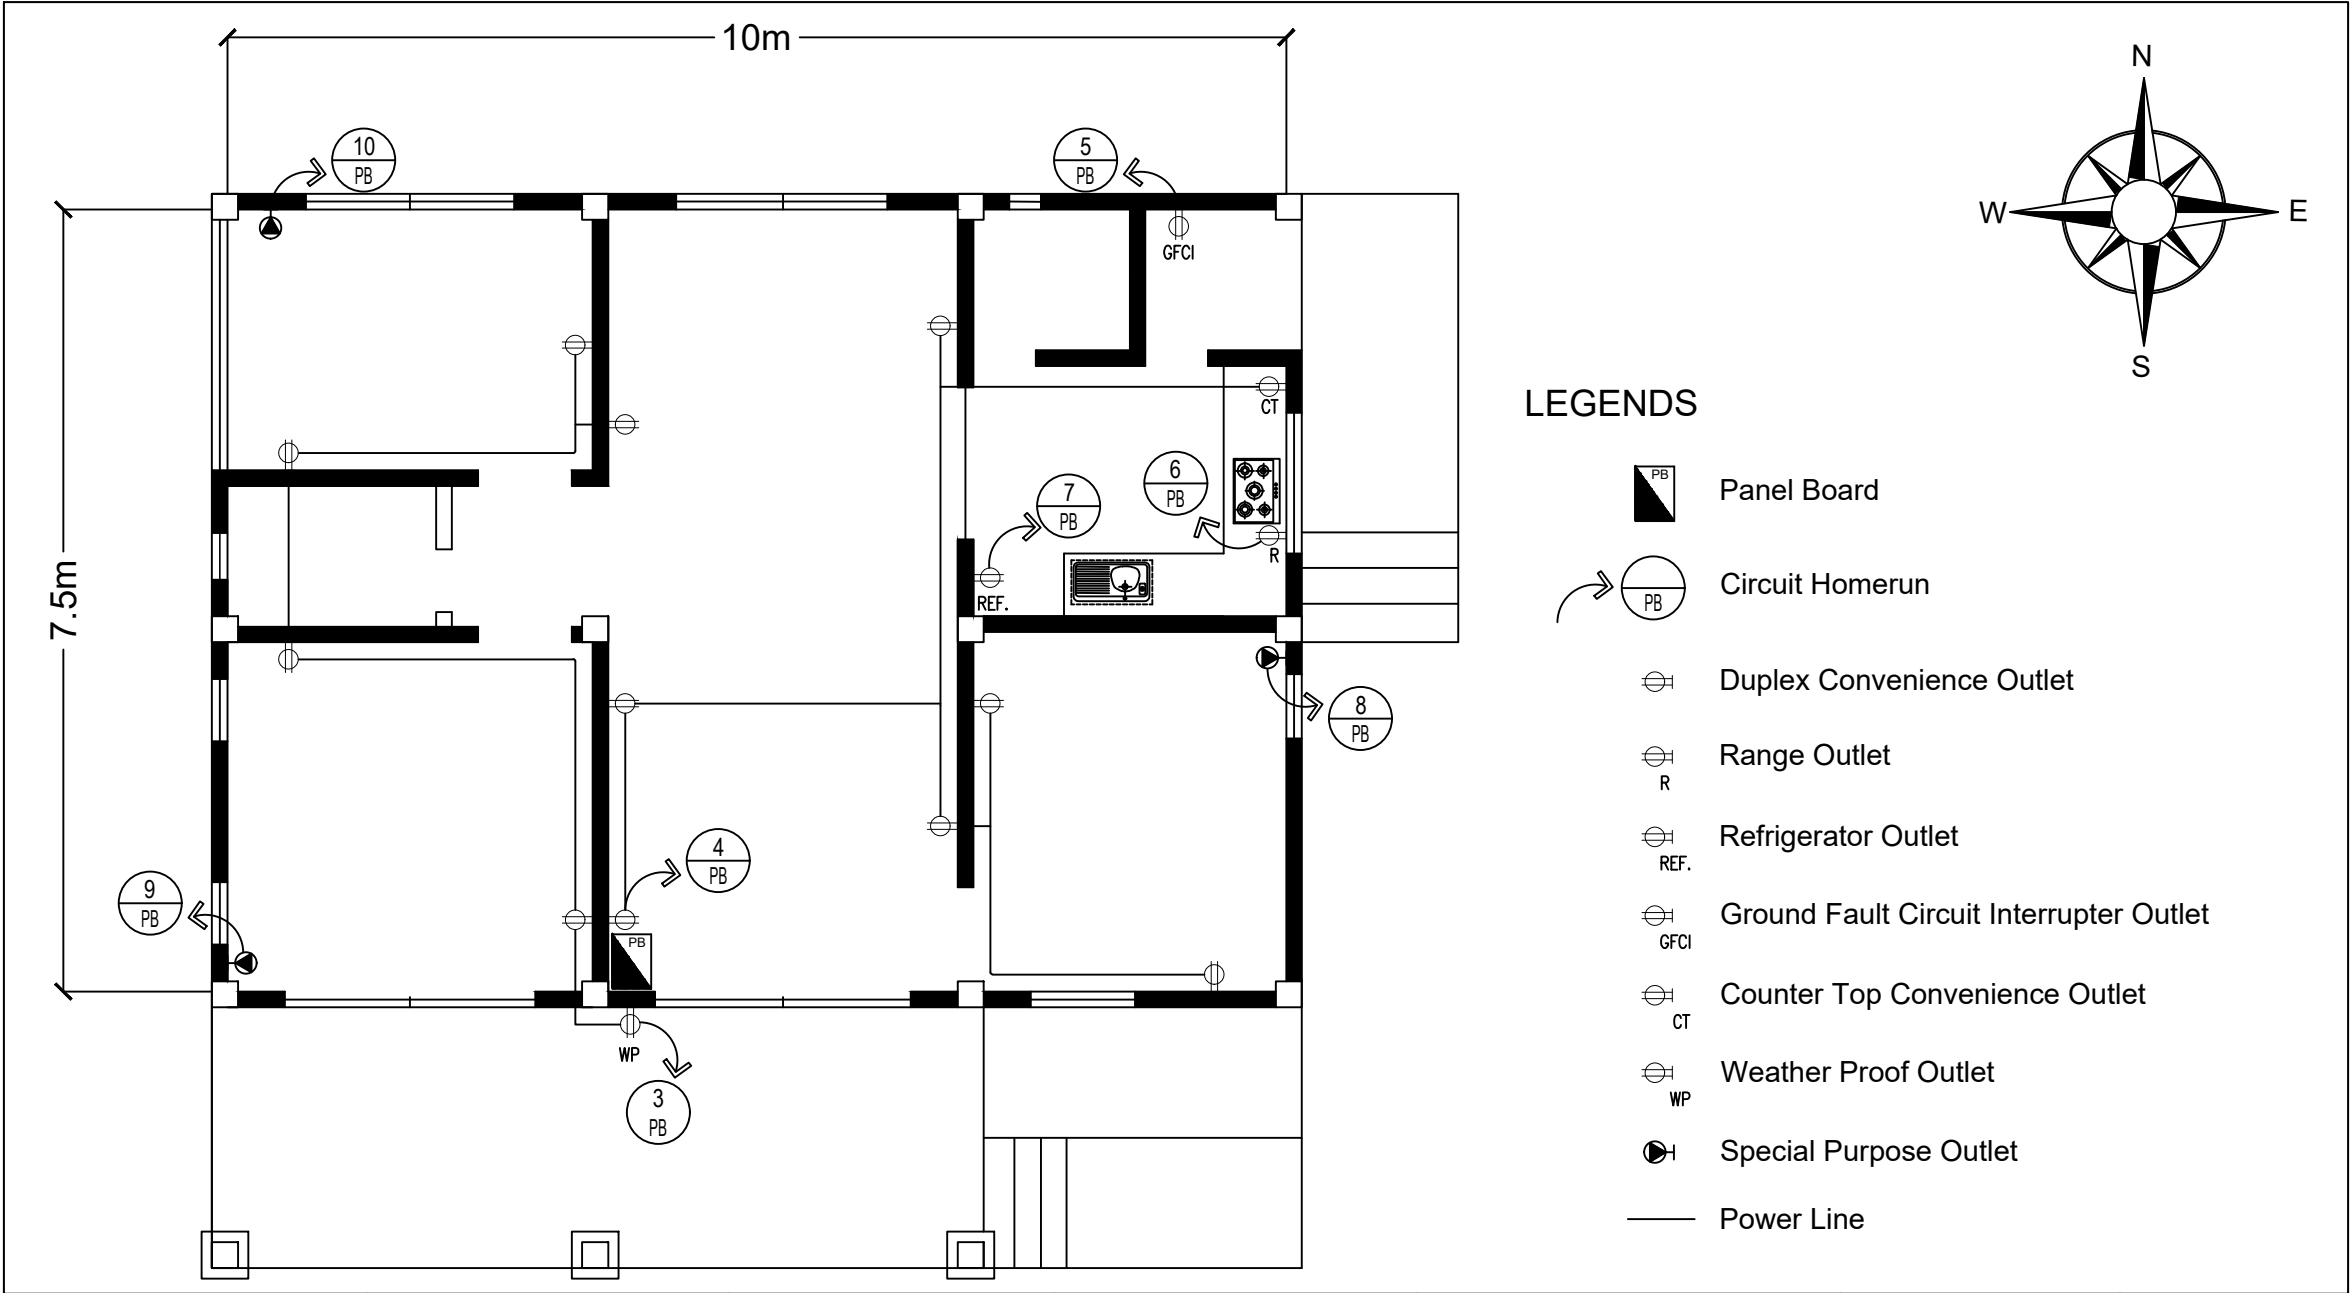

SCHOOL NAME:	COURSE TITLE:	PROJECT TITLE:	SUBMITTED BY:	SUBMITTED TO:	SHEET CONTENT:	GRADE:
 DR. EMILIO B. ESPINOSA SR. MEMORIAL STATE COLLEGE OF AGRICULTURE AND TECHNOLOGY	EE412 - ELECTRICAL SYSTEMS AND ILLUMINATION ENGINEERING DESIGN	SINGLE FAMILY DWELLING POWER LAYOUT	BLADEMIR P. RUBIA BSEE - 4	ENGR. CHRIS JAY D. DIONG-AN INSTRUCTOR	E 35	

SCHEDULE OF LOADS

PANEL : "PB"				MAIN: 100AT, 2PCB			
CKT. NO.	DESCRIPTION	VOLTS	BREAKER		LOAD IN		SIZE OF WIRE AND CONDUIT
			AT	POLE	VA	AMPS	
1.	6-CL @ 100W 1 - CHANDELIER @ 100W	230	15	2	700	3.04	1-2.0mm² COPPER WIRE IN 13mmØ CONDUIT
2.	6-CL @ 100W 1 - CHANDELIER @ 100W	230	15	2	700	3.04	1-2.0mm² COPPER WIRE IN 13mmØ CONDUIT
3.	6- DUPLEX CONVENIENCE OUTLET	230	20	2	2,160	9.39	2-3.5mm² COPPER WIRE IN 13mmØ CONDUIT
4.	7- DUPLEX CONVENIENCE OUTLET	230	20	2	2,520	10.96	2-3.5mm² COPPER WIRE IN 13mmØ CONDUIT
5.	LAUNDRY	230	20	2	1,500	6.52	2-3.5mm² COPPER WIRE IN 13mmØ CONDUIT
6.	REFRIGERATOR	230	30	2	1,500	6.52	2-3.5mm² COPPER WIRE IN 13mmØ CONDUIT
7.	RANGE	230	40	2	8,000	34.78	2-8.0mm² COPPER WIRE IN 20mmØ CONDUIT
8.	A.C.U. AT BR1	230	30	2	1,119	4.86	2-3.5mm² COPPER WIRE IN 13mmØ CONDUIT
9.	A.C.U. AT BR2	230	30	2	1,119	4.86	2-3.5mm² COPPER WIRE IN 13mmØ CONDUIT
10.	A.C.U. AT BR3	230	30	2	1,119	4.86	2-3.5mm² COPPER WIRE IN 13mmØ CONDUIT
11.	SPACE	230	-	2	-	-	- - -
12.	SPACE	230	-	2	-	-	- - -
TOTAL CONNECTED LOAD PLUS 25% OF THE LARGEST MOTOR							
IT = 16,477 W + 25%(1,119W)							
IT = 72.86 AMPS.							
MAIN : 100AT, 2PCB 250V.							
USE : 2-38mm²TW COPPER WIRE							

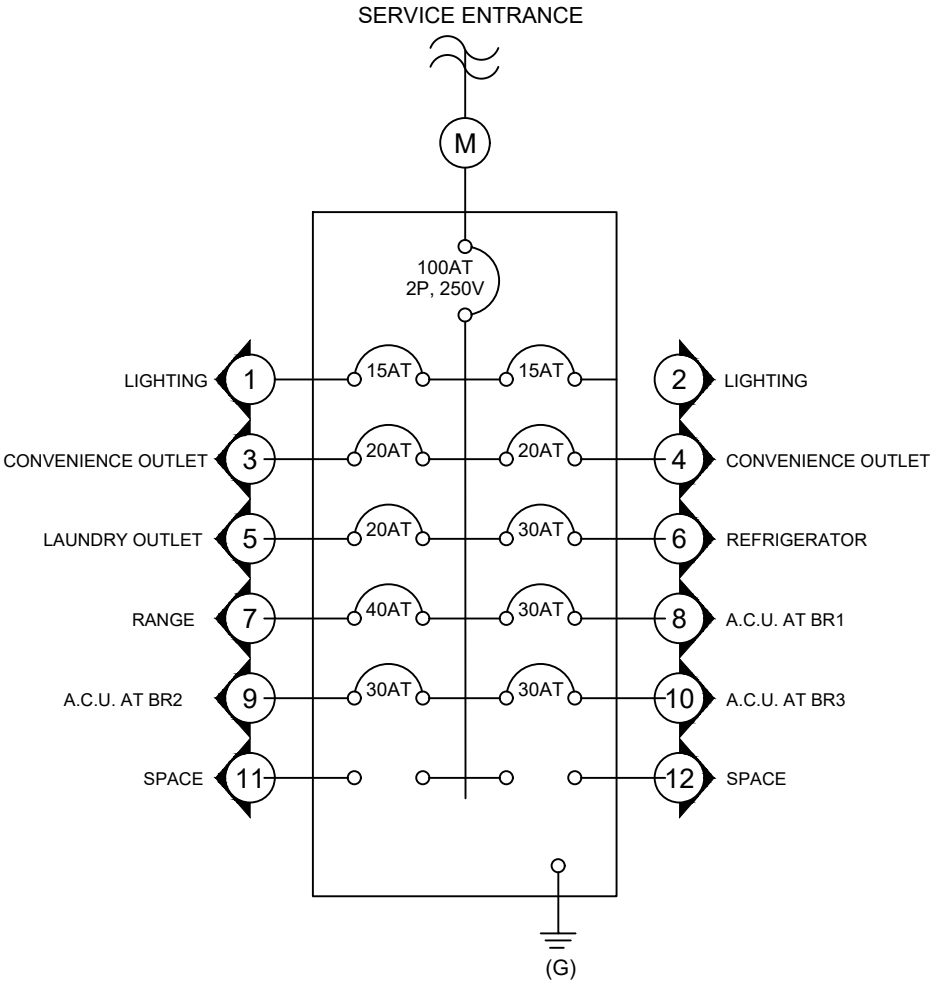

SINGLE LINE DIAGRAM

SCHOOL NAME:	COURSE TITLE:	PROJECT TITLE:	SUBMITTED BY:	SUBMITTED TO:	SHEET CONTENT:	GRADE:
 DR. EMILIO B. ESPINOSA SR. MEMORIAL STATE COLLEGE OF AGRICULTURE AND TECHNOLOGY	EE412 - ELECTRICAL SYSTEMS AND ILLUMINATION ENGINEERING DESIGN	SINGLE FAMILY DWELLING SCHEDULE OF LOADS AND SINGLE LINE DIAGRAM	BLADEMIR P. RUBIA BSEE - 4	ENGR. CHRIS JAY D. DIONG-AN INSTRUCTOR	E 4 5	

BILL OF MATERIALS

ITEM	QUANTITY	COST	TOTAL
Single gang Switch	10 set	Php. 128.00	Php. 1,280.00
3 gang Switch	1 set	Php. 92.00	Php. 92.00
Chandelier Lighting Fixture	2 pieces	Php. 1,500.00	Php. 3,000.00
Ceiling Light	10 pieces	Php. 50.00	Php. 500.00
Lighting Socket	12 pieces	Php. 50.00	Php. 600.00
Duplex Convenience Outlet	12 set	Php. 75.00	Php. 900.00
Counter Top Outlet	1 set	Php. 350.00	Php. 350.00
Range Outlet	1 set	Php. 300.00	Php. 300.00
Refrigerator Outlet	1 set	Php. 200.00	Php. 200.00
GFCI Outlet	1 set	Php. 500.00	Php. 500.00
Weather Proof Outlet	1 set	Php. 350.00	Php. 350.00
A.C.U. Outlet	3 set	Php. 290.00	Php. 870.00
2.0mm² Copper Wire	5 roll	Php. 1,500.00	Php. 7,500.00
3.5mm² Copper Wire	6 roll	Php. 2,200.00	Php. 13,200.00
8.0mm² Copper Wire	50 meters	Php. 80.00	Php. 4,000.00

22mm² Copper Wire	20 meters	Php. 202.00	Php. 4,040.00
38mm² Copper Wire	20 meters	Php. 350.00	Php. 7,000.00
13mmØ PVC PIPE	25 pieces	Php. 105.00	Php. 2,625.00
20mmØ PVC PIPE	5 pieces	Php. 105.00	Php. 525.00
32mmØ PVC PIPE	5 pieces	Php. 105.00	Php. 525.00
Panel Board	1 set	Php. 1,550.00	Php. 1,550.00
Junction Box	12 pieces	Php. 40.00	Php. 480.00
Utility Box	31 pieces	Php. 20.00	Php. 620.00
Safety Switch (100 amp)	1 piece	Php. 700.00	Php. 700.00
40 Amperes Breaker	1 piece	Php. 400.00	Php. 400.00
30 Amperes Breaker	4 pieces	Php. 110.00	Php. 440.00
20 Amperes Breaker	3 pieces	Php. 110.00	Php. 330.00
15 Amperes Breaker	2 pieces	Php. 110.00	Php. 220.00
Electrical Tape	5 pieces	Php. 60.00	Php. 300.00
GRAND TOTAL			PHP. 53,097.00

SCHOOL NAME:	COURSE TITLE:	PROJECT TITLE:	SUBMITTED BY:	SUBMITTED TO:	SHEET CONTENT:	GRADE:
 DR. EMILIO B. ESPINOSA SR. MEMORIAL STATE COLLEGE OF AGRICULTURE AND TECHNOLOGY	EE412 - ELECTRICAL SYSTEMS AND ILLUMINATION ENGINEERING DESIGN	SINGLE FAMILY DWELLING BILL OF MATERIALS	<u>BLADEMIR P. RUBIA</u> BSEE - 4	<u>ENGR. CHRIS JAY D. DIONG-AN</u> INSTRUCTOR	E 5 5	