



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA, 6.6 mF and isolation barrier (PVT-DDR-001)	2026-09-25	AC

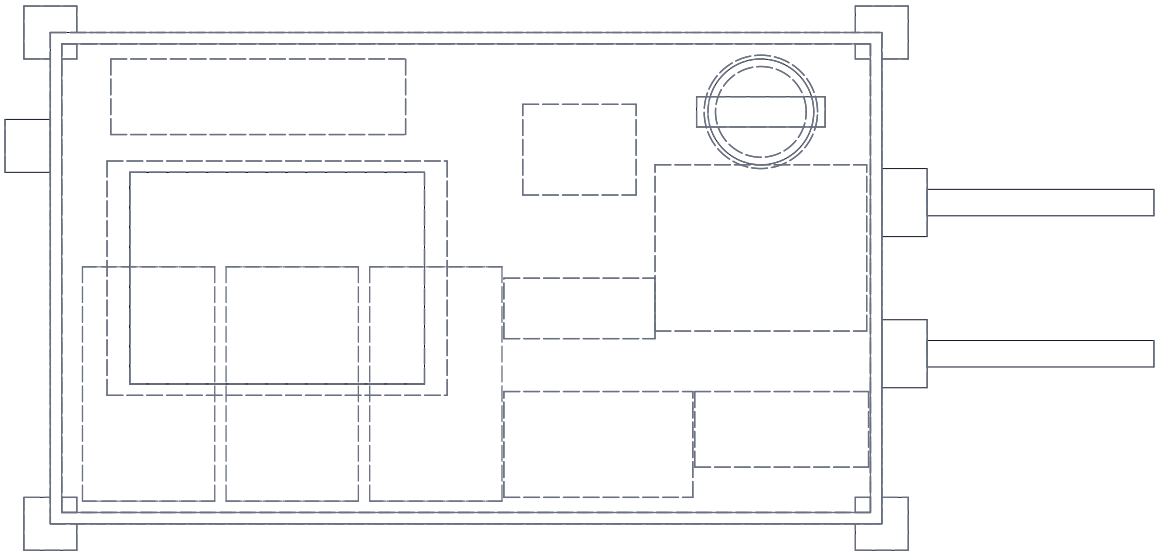


TOP VIEW
Scale 1:2

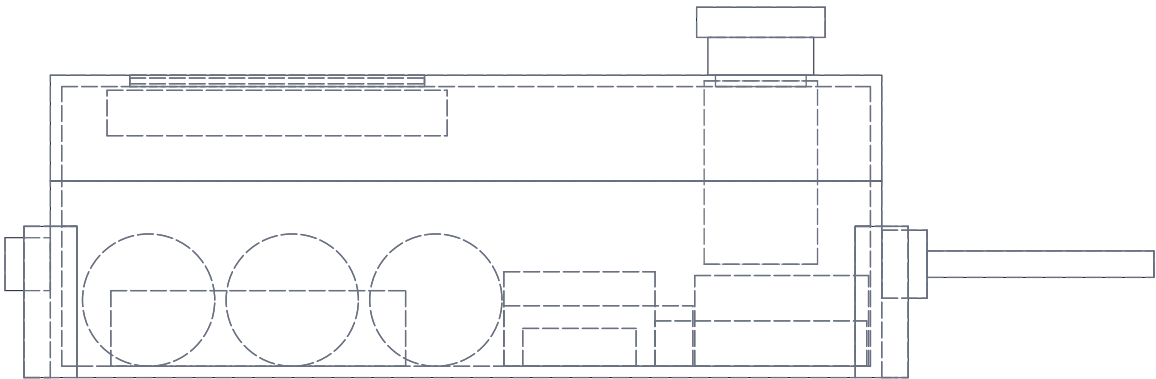

FRONT VIEW
Scale 1:2

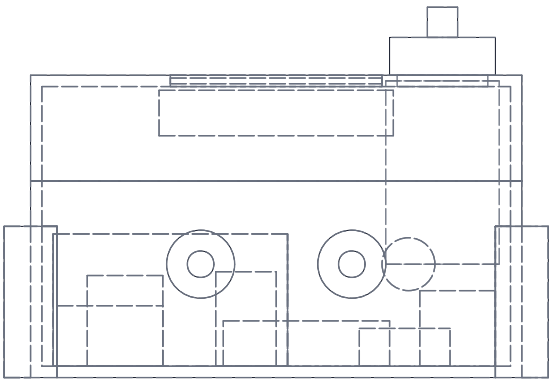

RIGHT VIEW
Scale 1:2

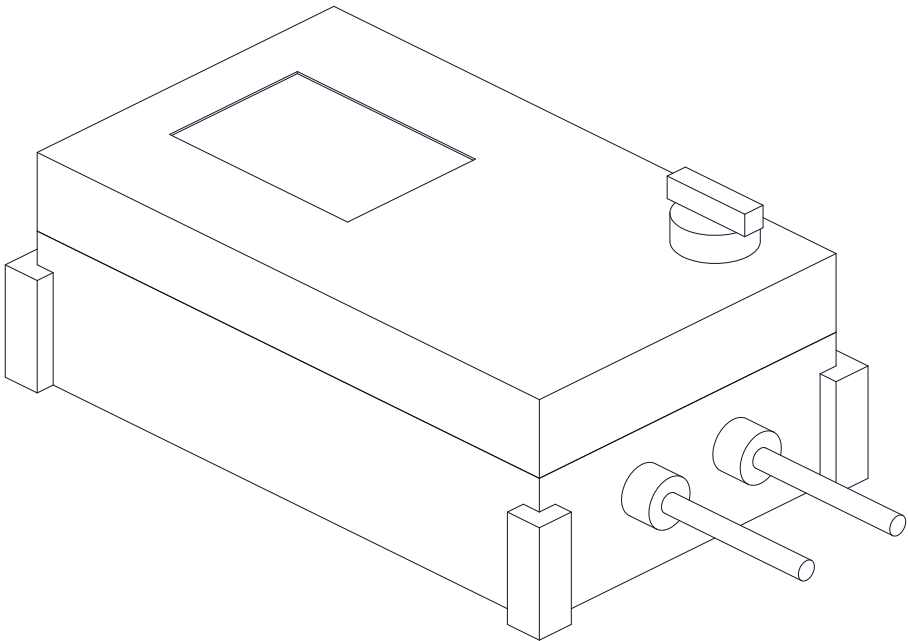

ISOMETRIC VIEW
Not to scale

KEY DIMENSIONS AND INTERFACES (MM)

Case 220 x 130 x 80; 234 x 144 over bumpers
Wall 3; parting line Z 52; knob top Z 98
+X end: 2 x M16 glands at Y +/-20, Z 30, test leads 4 mm2
-X end: M12 gland, sensor pod cable 3 m
Load: 3 x 2200 uF 160 V, 6.6 mF, along Y on floor
Isolation board between measurement side and controller
Display window 78 x 56 over controller
Rating 100 V DC, 20 A; 20 A gPV fuse; 2-pole DC isolator
Stored energy up to 33 J; dump 22 ohm, bleed 10 kohm
Mass about 1.41 kg with leads and pod (PVT-CAL-001)
Sensor pod 100 x 70 x 22 plus frame clip: see STEP
PRELIMINARY, NOT FOR FABRICATION

PVTRACE

General arrangement, handheld tracer

DRAWING NO. PVT-DWG-001		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-25	DRAWN Amish Chadha
MATERIAL / NOTES Case IP54 ABS, light grey; window 3 mm PC. See bom/bom.csv and PVT-CAL-001				
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com			Generated from cad/src; do not edit by hand	