



CONCEPT, NOT FOR FABRICATION

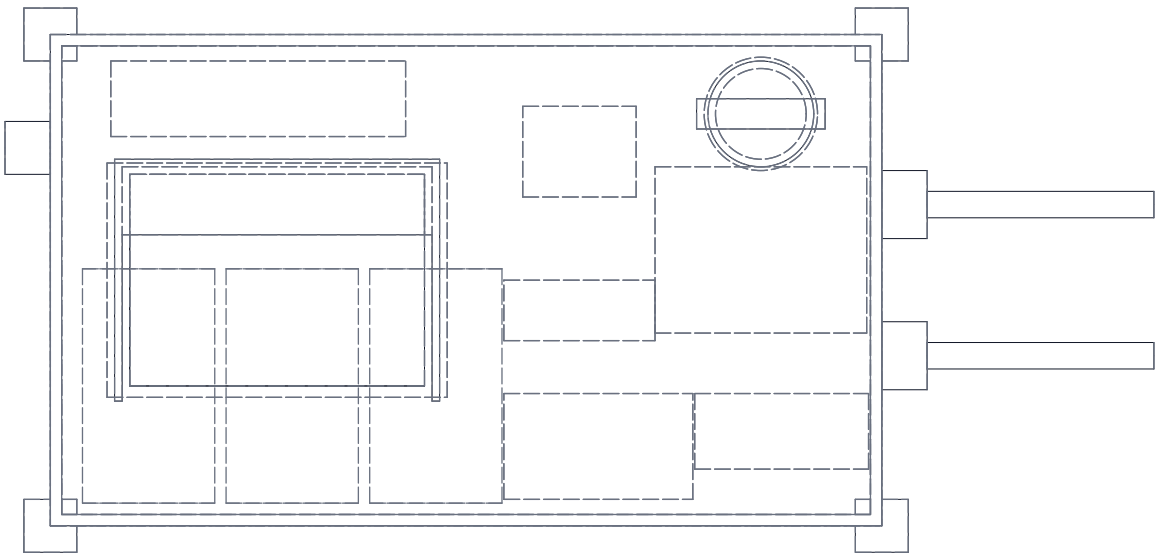


TOP VIEW

Scale 1:2

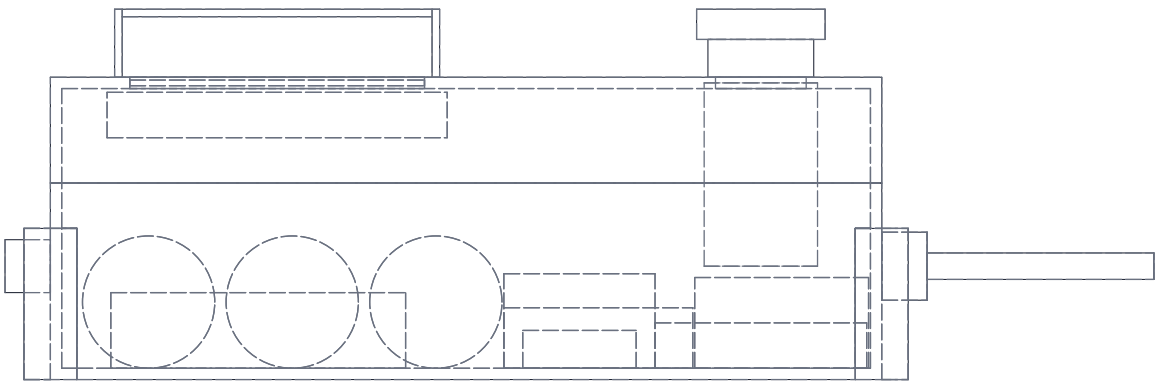

FRONT VIEW


Scale 1:2

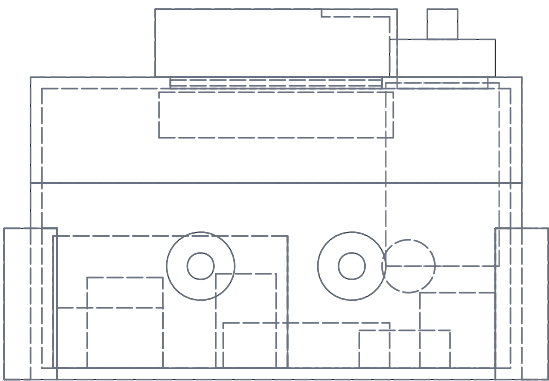

RIGHT VIEW

Scale 1:2

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA, 6.6 mF and isolation barrier (PVT-DDR-001)	2026-09-25	AC
P2	Display sun hood added (PVT-DDR-002)	2026-09-25	AC

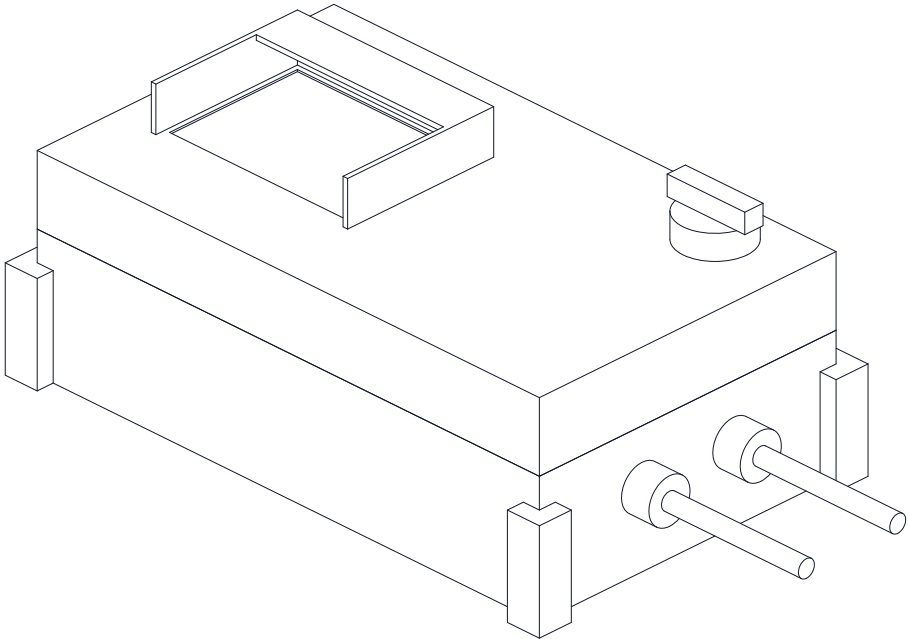

ISOMETRIC VIEW

Not to scale

KEY DIMENSIONS AND INTERFACES (MM)

Case 220 x 130 x 80; 234 x 144 over bumpers
Wall 3; parting line Z 52; knob top Z 98
+X end: 2 x M16 glands at Y +/-20, Z 30, test leads 4 mm2
-X end: M12 gland, sensor pod cable 3 m
Load: 3 x 2200 uF 160 V, 6.6 mF, along Y on floor
Isolation board between measurement side and controller
Display window 78 x 56 over controller
Sun hood 86 x 64 x 18, open to -Y; top Z 98
Rating 100 V DC, 20 A; 20 A gPV fuse; 2-pole DC isolator
Stored energy up to 33 J; dump 22 ohm, bleed 10 kohm
Mass about 1.43 kg with leads and pod (PVT-CAL-001)
Sensor pod 100 x 70 x 22 plus frame clip: see STEP
PRELIMINARY, NOT FOR FABRICATION

PVTRACE

General arrangement, handheld tracer

DRAWING NO. PVT-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Case IP54 ABS, light grey; window 3 mm PC; hood PETG. See bom/bom.csv and PVT-CAL-001					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand