



CONCEPT, NOT FOR FABRICATION


PVTrace · github.com/BoujeeEnjinia1701/pvtrace

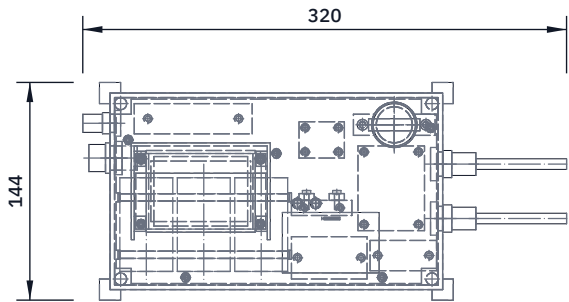

TOP VIEW
Scale 1:5; looking down (along -Z)

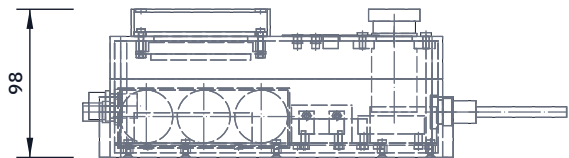


FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA, 6.6 mF and isolation barrier (PVT-DDR-001)	2026-09-25	AC
P2	Display sun hood added (PVT-DDR-002)	2026-09-25	AC
P3	Constructable design: plate, fixings, USB-C (PVT-DDR-003)	2026-10-01	AC
P4	Keypad and status LEDs on the lid (PVT-DEC-001 item 6)	2026-10-02	AC

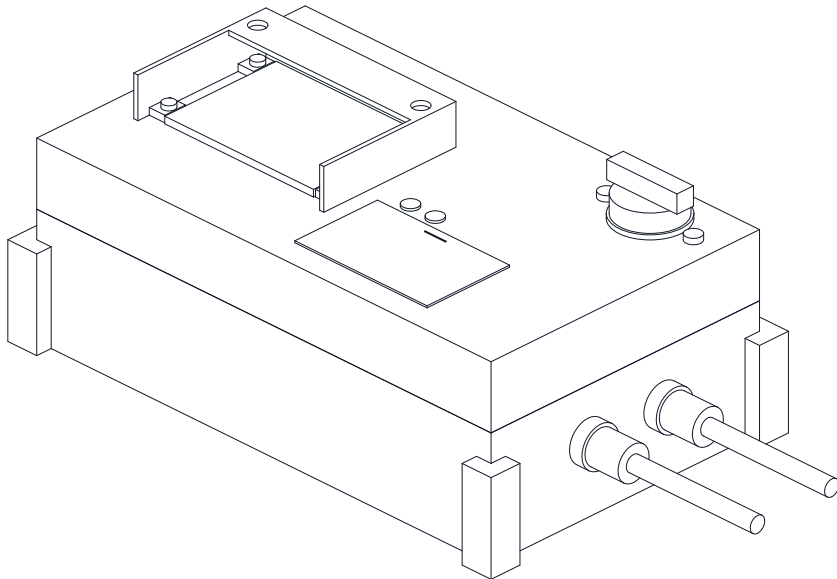

ISOMETRIC VIEW
Not to scale; seen from the front right and above, about 30 deg elevation

KEY DIMENSIONS AND INTERFACES (MM)

Case 220 x 130 x 80; 234 x 144 over bumpers
Wall 3; parting line Z 52; knob and hood top Z 98
+X end: 2 x M16 glands at Y +/-18, Z 30, test leads 4 mm2
-X end: M12 sensor gland Y 45; USB-C socket Y 22
Chassis plate PC 1.5 on five 5 mm standoffs
Load: 3 x 2200 uF 160 V, 6.6 mF, 2 cable ties
Isolation board between measurement side and controller
Lid: 3-key membrane keypad and two status LEDs, controller side
Window 72 x 54 bonded over 62 x 46 opening
Display board on 4 spacers; hood screws hold both
Rating 100 V DC, 20 A; 20 A gPV fuse; 2-pole DC isolator
Stored energy up to 33 J; dump 22 ohm, bleed 10 kohm
Mass about 1.49 kg with leads and pod (PVT-CAL-001)
Making sketches PVT-DWG-101 to 108 (lid: 104)
PRELIMINARY, NOT FOR FABRICATION

PVTRACE

github.com/BoujeeEnjinia1701/pvtrace

General arrangement, handheld tracer

DRAWING NO. PVT-DWG-001			REV P4	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Case IP54 ABS, light grey; window and chassis plate PC; hood PETG. See bom/bom.csv, PVT-CAL-001					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand