


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:20; looking down (along -Z)

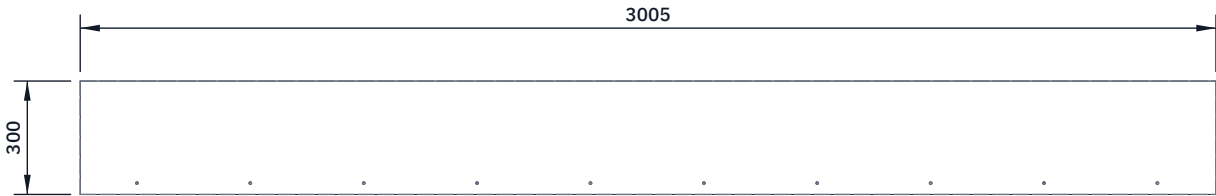


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

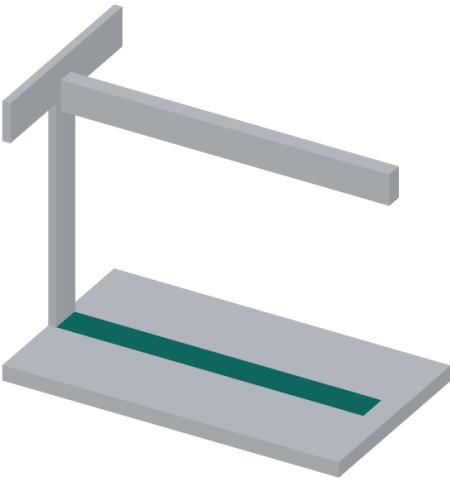

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Container option only; a rented shed needs none.
Make four lengths, each 3005 x 300 mm, from 4.5 mm tread plate.
Laid end to end along the seam with 4 mm gaps; the four lengths run the full 12,032 mm between the end walls.
Chamfer both long edges 2 mm at 45 degrees so trolleys roll over.
Drill and countersink 6.5 mm holes along ONE long edge only, 30 mm in from the edge, 150 mm from each end and at 300 mm pitch.
Fit: centre on the seam, screw down with M6 x 40 countersunk wood screws into the floor of the intake-side container only, so the two containers can move a little without tearing the plate.
Check: the plate lies flat with no edge more than 1 mm proud.

ReflowEconomy floor seam cover plate (make 4): making sketch

DRAWING NO. RFE-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium tread plate 4.5 mm, 5754 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	