
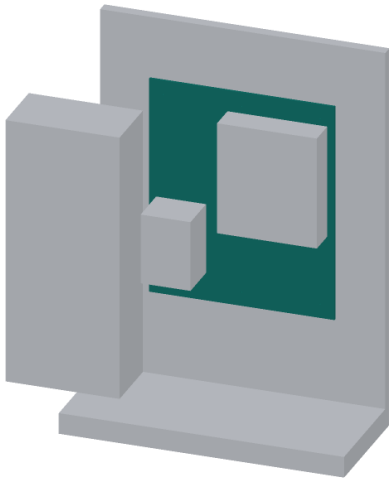
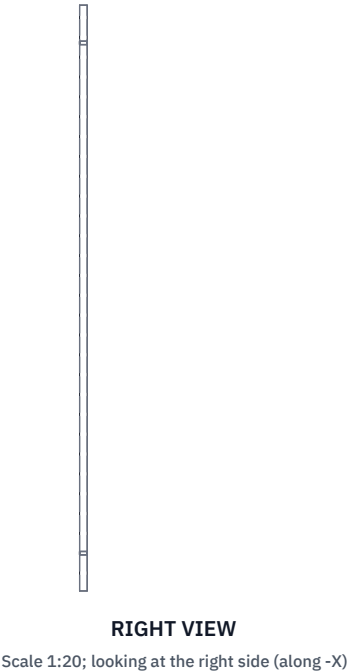
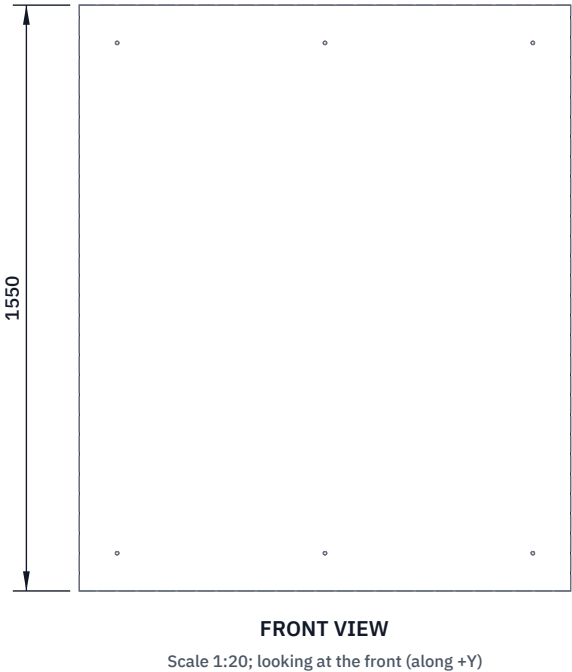


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

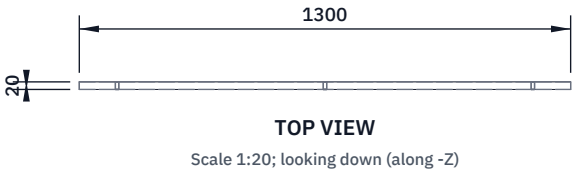

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

One 1300 x 1550 mm sheet of 18 mm fire-retardant plywood.

Seal both faces and all edges with two coats of paint.

Drill six 9 mm holes: 100, 650 and 1200 mm from the left edge, in two rows 100 and 1450 mm up from the bottom edge. Move each hole sideways up to 40 mm so it lands on a corrugation crest.

Fit: bottom edge 600 mm above the floor, left edge 3350 mm from the outside of the intake end, on the back wall; M8 rivet nuts in crests, M8 x 30 screws with large washers.

Board area: 550 to 1250 mm from the left edge, 600 to 1400 mm up.

Eyewash: 50 to 400 mm from the left edge, 200 to 700 mm up.

Cable tray runs along the front face at the top, 1438 mm up.

Check: the board is flat and does not rock on the corrugations.

REFLOWECONOMY

github.com/BoujeeEnjinia1701/refloweconomy

ReflowEconomy backboard: making sketch

DRAWING NO. RFE-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Fire-retardant plywood 18 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	