



CONCEPT, NOT FOR FABRICATION

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC

panel 70 x 50 at 30 deg, faces +X (equator)




TOP VIEW
Scale 1:5

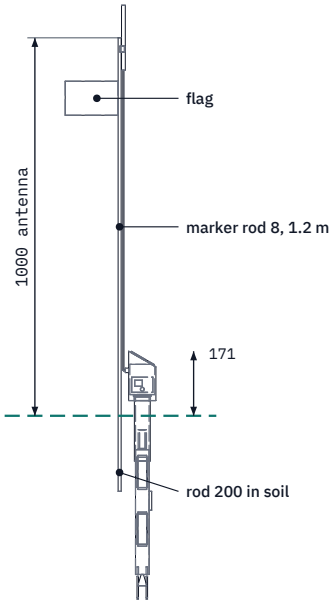


INSTALLED ELEVATION

Scale 1:20; front, with marker rod and antenna

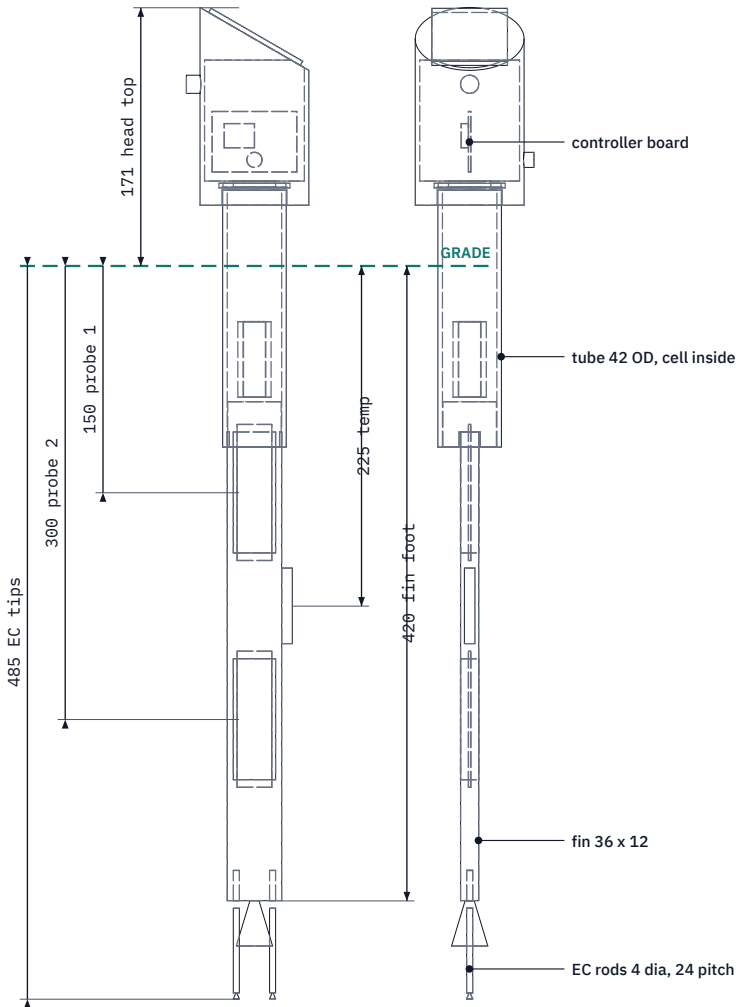

FRONT VIEW
Scale 1:5

RIGHT VIEW
Scale 1:5



ISOMETRIC VIEW
Not to scale

MAIN DIMENSIONS AND INTERFACES (MM)

Tube 42 OD x 36 ID PVC, Z -120 to 50; head socket 12 deep
Head 72 dia ASA, top 171 above grade; panel 70 x 50 at 30 deg
Fin 36 x 12 x 310, spigot 35.4 dia into the tube
Probe windows centered 150 and 300 deep, 80 long
DS18B20 at 225; EC rods 4 dia at 24 pitch, 60 exposed
Cell 14500 LiFePO4 centered 62 below grade
Antenna sleeve dipole centered 1000 on the marker rod (RMS-DDR-001 D2)
Fin pushed 330 into undisturbed soil below a 50 dia auger hole
Third-angle; front view from -Y; X toward the equator

ROOTMESH

General arrangement, sensor stake

DRAWING NO. RMS-DWG-001		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-25	DRAWN Amish Chadha
MATERIAL / NOTES ASA head, PVC tube, PETG or ASA fin, 316 stainless electrodes; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION				
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com			Generated from cad/src; do not edit by hand	