
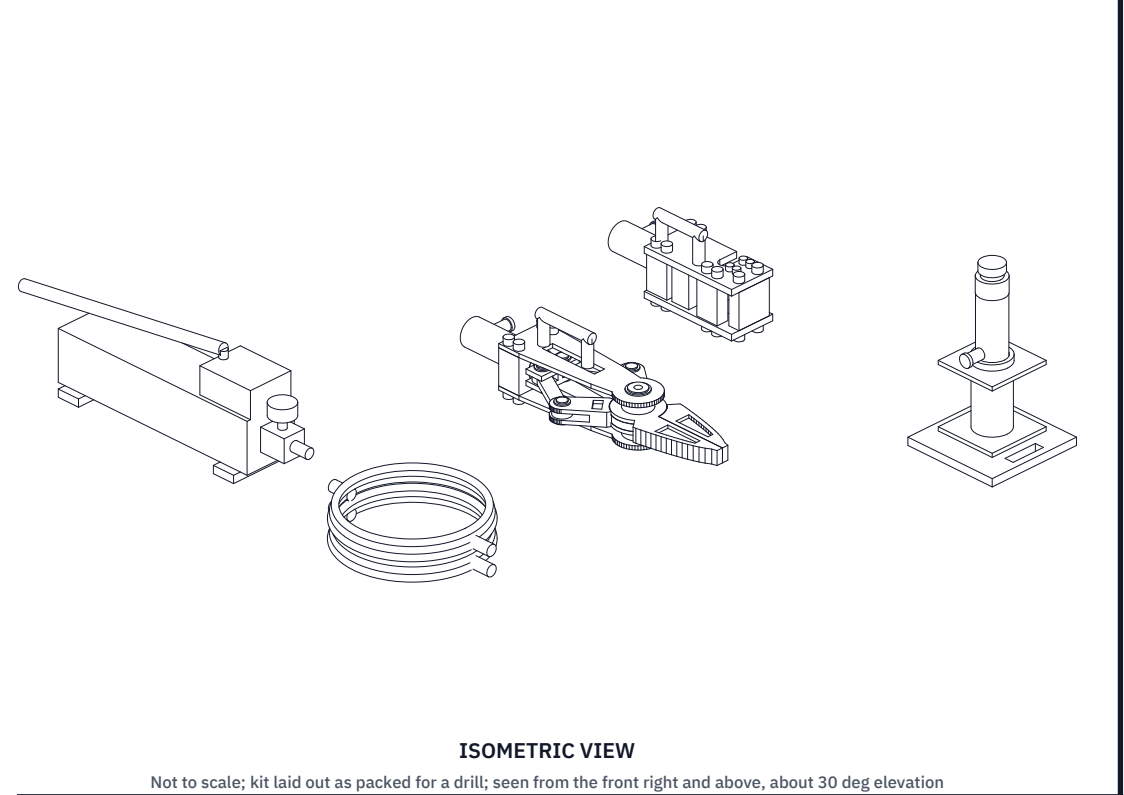
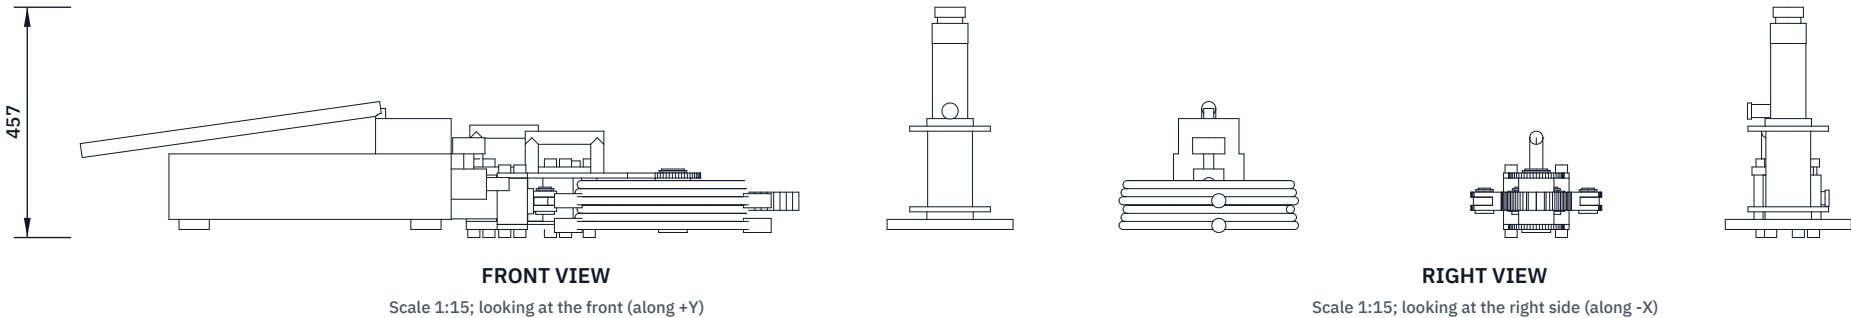


CONCEPT, NOT FOR FABRICATION
PRELIMINARY, NOT FOR FABRICATION

RubbleJack · github.com/BoujeeEnjinia1701/rubblejack

REV	DESCRIPTION	DATE	BY
P1	General arrangement of the constructable design (RBJ-DDR-002)	2026-10-03	AC

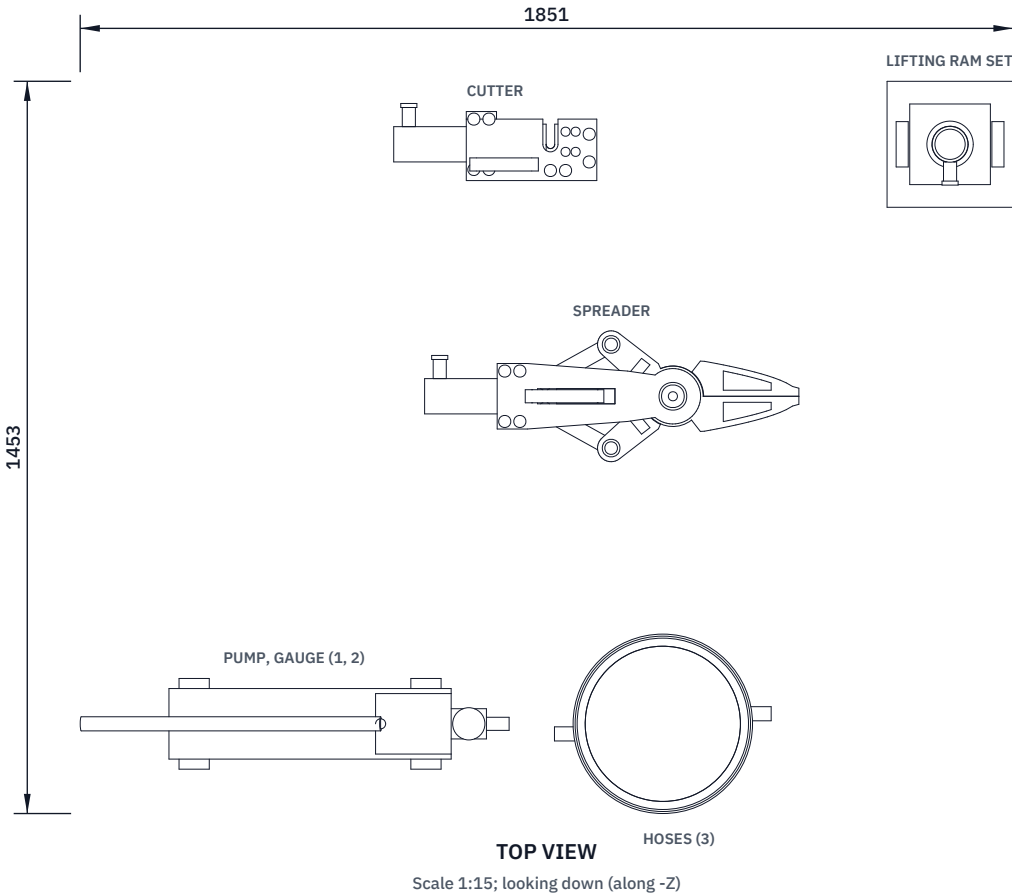

MAIN DIMENSIONS AND INTERFACES (MM)

- Cylinder (5), one per tool: 15 t, 101 stroke, 20.3 cm², 700 bar
- Spreader: jaws 250 pivot to tip, 36 thick; tips 32 closed, 262 open
- Spreader frame plates (7) 7075-T6, 10 thick, 92 apart inside
- Pins (12): pivot 45, links 25; link centres 150
- Cutter: 16 bar in a 30 hook; blade travel 30 to the stop bar
- Cutter plates (17) S690QL 16; stop bar 60 long, 2 screws each plate
- Ram base (14) 250 square, 20 S690QL; riser (15) tube 88.9 x 10, 150 long
- Collar adapter (6) 60 x 130 x 92; 8 x M16 12.9 to the plates
- Hoses (3) 2 m, 700 bar; pump (1) two-speed, 900 cm³ oil
- Every pressurised part rated 700 bar; pump relief 700 bar
- Third-angle; top view from +Z; (n) = BOM line

RUBBLEJACK				github.com/BoujeeEnjinia1701/rubblejack			
Hand-pumped rescue tool kit: general arrangement							
DRAWING NO. RBJ-DWG-001			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:15	UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES Per bom/bom.csv: 4340 and S690QL steel, S7 tool steel, 7075-T6 aluminium, bought 700 bar hydraulics. PRELIMINARY, NOT FOR FABRICATION							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand			