


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

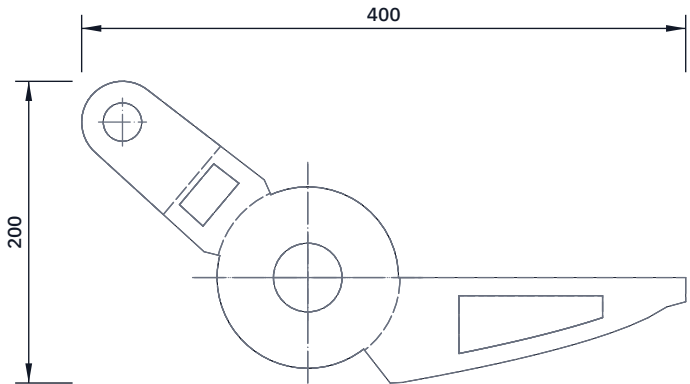


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

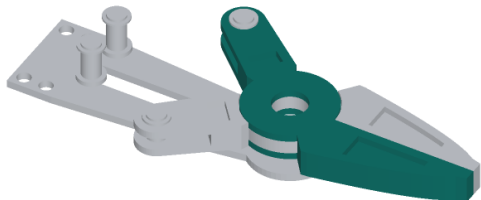

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut the profile from 40 mm plate (waterjet), then mill both faces to 36 mm.

Jaw: 250 mm from the pivot to the tip; straight inner face; outer edge

70 deep near the pivot, curving to 16 deep at the tip.

Tail: pin bore 25.4 mm, 160 mm from the pivot, 140 deg round from the jaw's inner face, behind the pivot.

Link slot 16.5 wide, centred in the thickness, from 100 mm out to the tail end.

Pivot bore 45.4 mm, reamed.

B twin knuckles 9 mm thick: cut an 18 mm wide groove, centred, within a 61 mm radius of the pivot.

Pockets 8 deep both faces, 12 in from the edges, in the jaw and tail.

Serrate the tip's outer face (2 mm teeth across) for grip.

Make A and B as a pair; break every edge 1 mm; no tool marks

across the jaw near the pivot. Crack-check after heat treatment.

Check: A's knuckle slides into B's groove; the bores line up.

RUBBLEJACK

github.com/BoujeeEnjinia1701/rubblejack

RubbleJack jaw arm B: making sketch

DRAWING NO. RBJ-DWG-106		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES 4340 steel plate 40 mm, quenched and tempered to about 300 HB				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	