




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

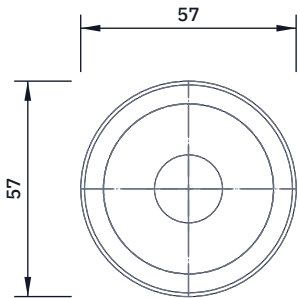


TOP VIEW
Scale 1:2; looking down (along -Z)

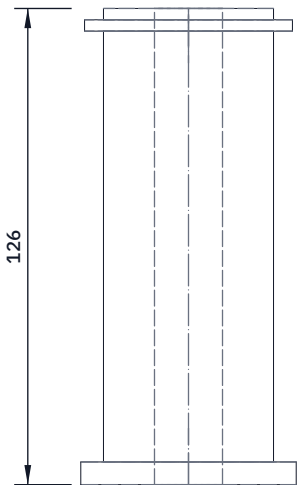

FRONT VIEW
Scale 1:2; looking at the front (along +Y)

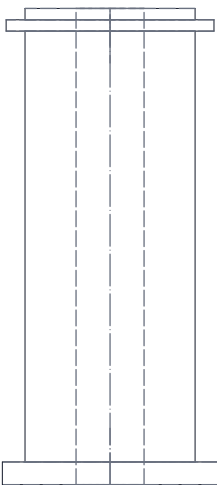

RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

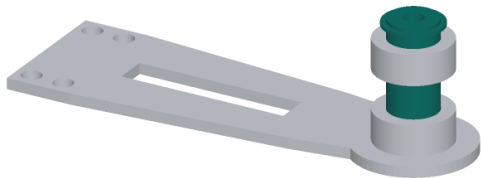

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Turn from bar: 45 mm ground, 120 mm long under the head;
head 57 mm across and 6 mm thick.
Bore 18 mm through on the axis (saves weight).
Circlip groove for a 45 mm external circlip, 3 to 6 mm from the
plain end; washer under the circlip.
Chamfer the plain end 2 mm so it finds the bores.
Check: slides through both plates, spacers and knuckles by hand.

RUBBLEJACK

github.com/BoujeeEnjinia1701/rubblejack

RubbleJack main pivot pin: making sketch

DRAWING NO. RBJ-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 4340 steel bar, quenched and tempered to about 300 HB					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand