



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

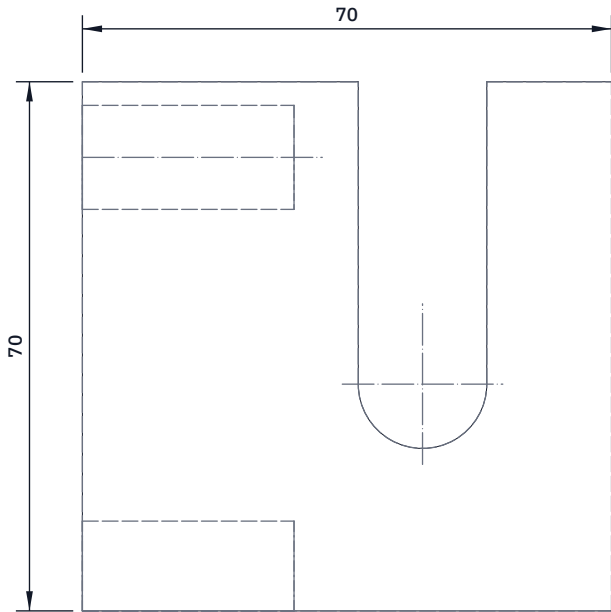


TOP VIEW

Scale 1:1; looking down (along -Z)

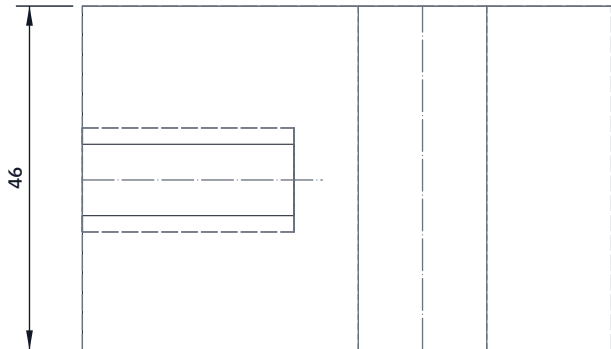


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

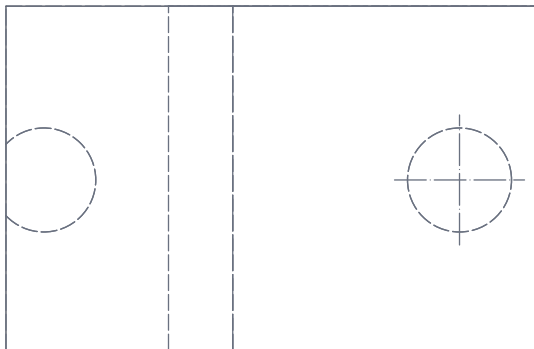

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

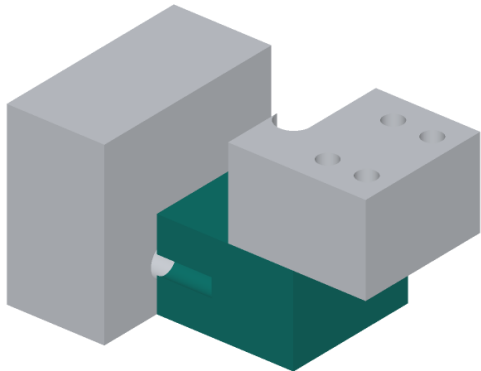

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Block 70 long x 70 wide x 45.5 tall (the lower half of the shear).
U notch 17 wide, its round bottom centred 45 mm from the back face, open to the top long edge. The notch's back wall pushes the bar.
Back face: two M16 holes, 28 deep, matching the carrier's holes.
Machine soft, heat treat, then grind the top face flat and the notch edges sharp and square: this face slides past the fixed blade.
Check: top face flat to 0.05 mm on a surface plate.

RUBBLEJACK

github.com/BoujeeEnjinia1701/rubblejack

RubbleJack moving blade: making sketch

DRAWING NO. RBJ-DWG-112			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES S7 shock-resisting tool steel, hardened 54 to 56 HRC					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	