




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

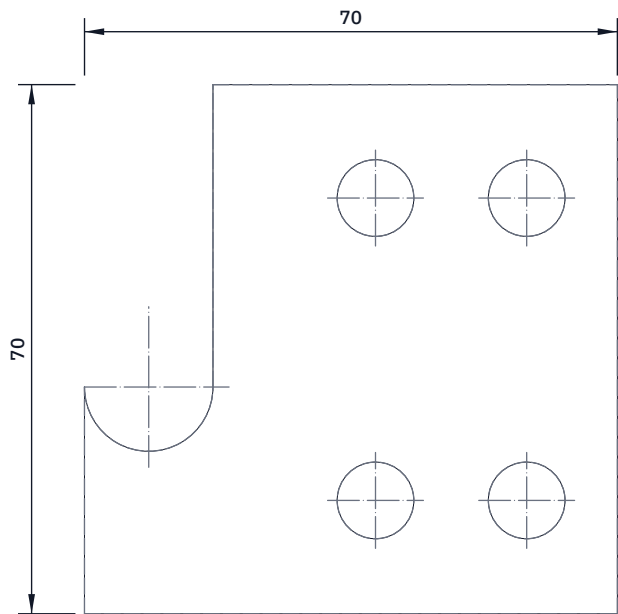


TOP VIEW
Scale 1:1; looking down (along -Z)

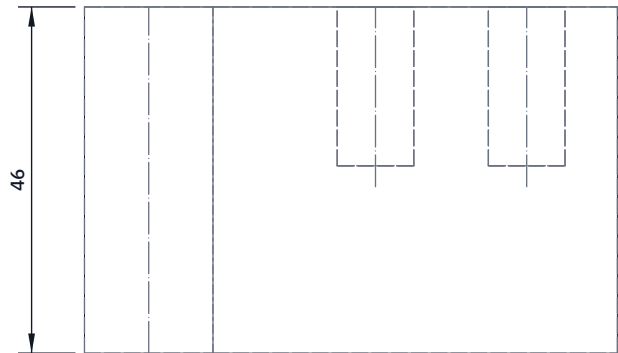

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

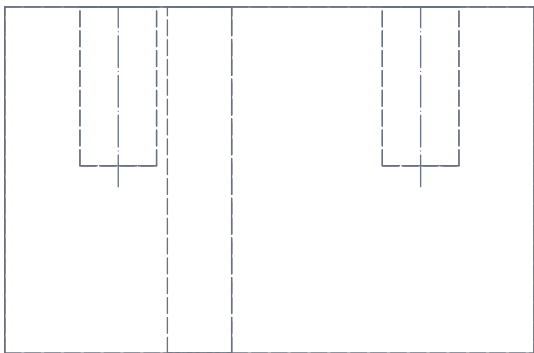

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

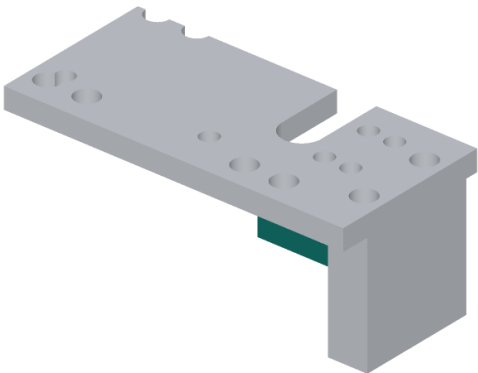

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Block 70.5 long x 70 wide x 45.8 tall (the upper half).
U notch 17 wide, its round bottom 8.5 mm from the back face, in line with the moving blade's notch.
Top face: four M12 holes 20 deep at 30 and 50 mm in front of the notch centre, 15 mm toward the lower edge and 25 mm toward the upper.
Grind the bottom face flat and the notch edges sharp; the front face bears on the nose block and must be square.
Fit: 0.2 mm above the moving blade; shim under the upper plate if needed.

RUBBLEJACK

github.com/BoujeeEnjinia1701/rubblejack

RubbleJack fixed blade: making sketch

DRAWING NO. RBJ-DWG-113		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES S7 shock-resisting tool steel, hardened 54 to 56 HRC				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	