



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

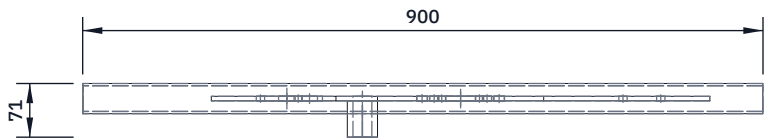


TOP VIEW
Scale 1:10; looking down (along -Z)

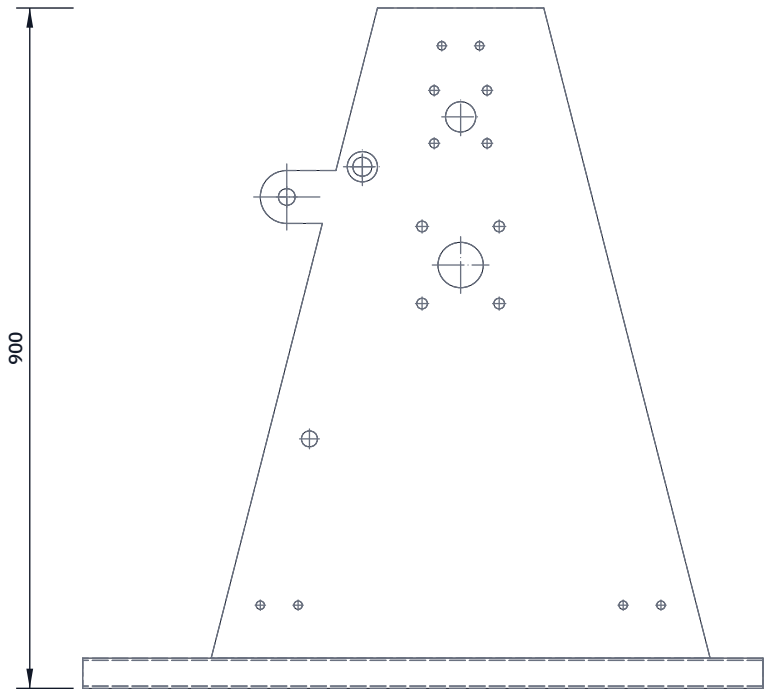

FRONT VIEW
Scale 1:10; looking at the front (along +Y)



RIGHT VIEW
Scale 1:10; looking at the right side (along -X)

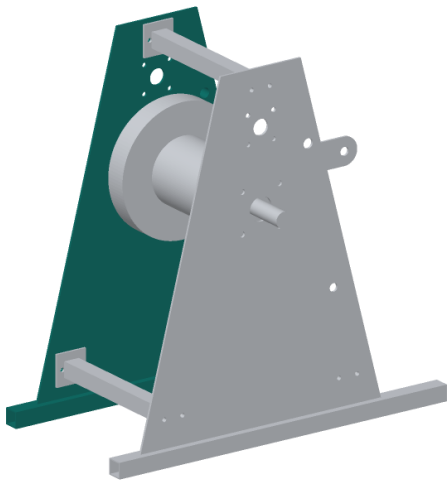

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Make 4: two per capstan. Left frames also get the pawl boss.
- Cheek: 6 mm plate, 660 wide at the base, 220 at the top, 860 tall; base edge 40 mm up (it sits on the runner).
- Ear at the rear: 70 mm tall, round end R35, 22 mm hole 230 behind the drum centre line and 650 mm above the ground.
- Drum hole 60 mm at 560 mm up; crank shaft hole 40 mm at 756 mm up.
- Bearing bolts: 14 mm holes on a 102 square (drum), 12 mm on a 70 square (crank shaft), centred on each hole.
- Cross tube bolts: 11 mm pairs 50 apart at the three tube positions.
- Pawl bolt 25 mm at 130 back, 690 up; brake pivot 21 mm at 200 back, 330 up. Drill both in all four frames.
- Runner: SHS 40 x 40 x 3, 900 long, 400 ahead of and 500 behind the drum centre. Weld the cheek on its centre line, both sides.
- Left frames: weld a 40 OD, 24 bore boss 52 long on the outside over the pawl hole. Galvanise after welding and drilling.
- Check: the drum and crank shaft holes of a pair line up on a rod.

SALTDRAW				github.com/BoujeeEnjinia1701/saltdrag			
SaltDrag capstan side frame (make 4): making sketch							
DRAWING NO. SDG-DWG-101			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES S275 steel plate 6 mm and SHS 40 x 40 x 3 mm; hot-dip galvanised							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com							
Generated from cad/src; do not edit by hand							