



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

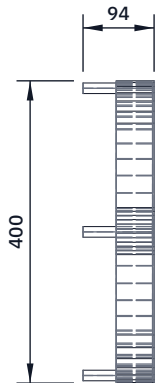


TOP VIEW

Scale 1:10; looking down (along -Z)




FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

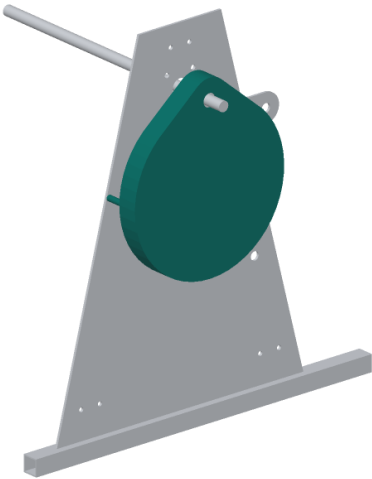

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Outline: a 400 mm circle round the gear centre joined by straight sides to a 100 mm circle round the crank shaft centre (196 above).
Face: 2 mm sheet cut to the outline; 32 mm hole for the crank shaft.
Rim: 2 mm strip 50 wide, rolled and welded round the face edge, so the guard is a cup 50 deep, open toward the cheek.
Spacers: three 14 OD tubes 44 long between the cheek and the cup edge, at the front, rear and bottom, 190 from the gear centre.
M8 bolts through cup, spacer and cheek (drill the cheek 9 mm).
Paint bright yellow so the moving gears are marked.
Fit: 11 mm clear of the gear teeth, 3.5 mm round the crank shaft.
Check: no finger can reach the gear mesh from outside the guard.

SALTDRAW

github.com/BoujeeEnjinia1701/saltdrag

SaltDrag gear guard (make 2): making sketch

DRAWING NO. SDG-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Steel sheet 2 mm, tube 14 OD spacers, M8 bolts; painted yellow					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand