




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

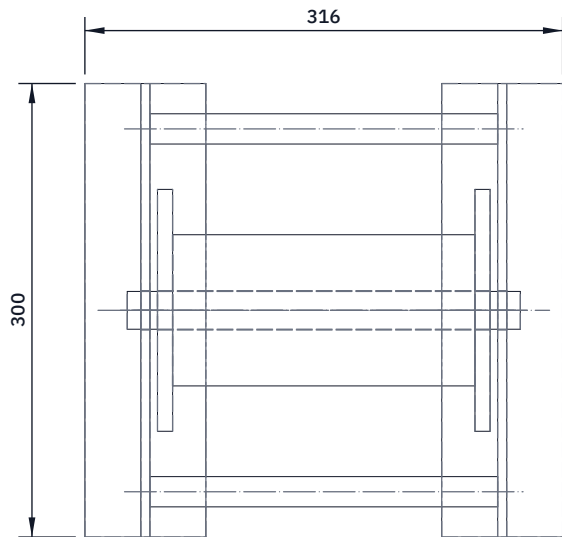


TOP VIEW
Scale 1:5; looking down (along -Z)

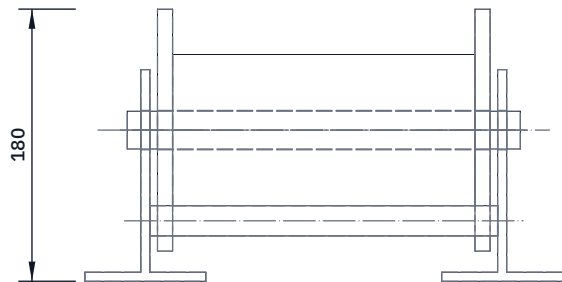

FRONT VIEW
Scale 1:5; looking at the front (along +Y)

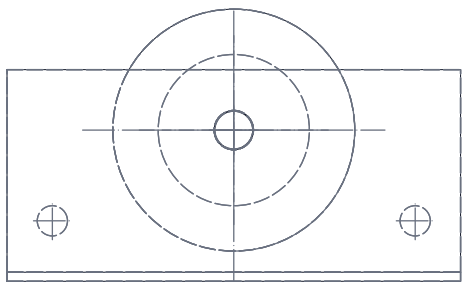

RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

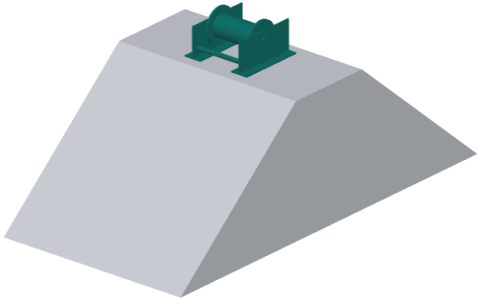

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Side plates: two, 6 mm, 300 long x 140 tall, with a 70 mm round boss at 100 up; 26 mm axle hole at its centre. 236 apart (centres).

Foot plates: 80 x 6 mm, 300 long, welded under each side plate.

Tie bars: two 20 mm round bars between the side plates, 120 ahead of and behind the axle, 40 up. Weld, then galvanise.

Roller: UHMW-PE 100 OD x 200 long, 26 mm bore; two UHMW-PE flanges 160 OD x 10 bolted or pressed on the ends.

Axle: stainless 316, 25 mm, 260 long, R-clip holes 8 from each end.

The saddle sits astride the bund crest with the rope over the roller, so the rope never cuts the bund. Roller top 150 above the crest.

Fit: 5 mm clear between the flanges and the side plates.

Check: the roller spins freely; the feet sit flat on a board.

SALTDRAW

github.com/BoujeeEnjinia1701/saltdrag

SaltDrag bund roller saddle (make 2): making sketch

DRAWING NO. SDG-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES S275 plate 6 mm, bar 20 mm, galvanised; UHMW-PE roller; 316 axle					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand