


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

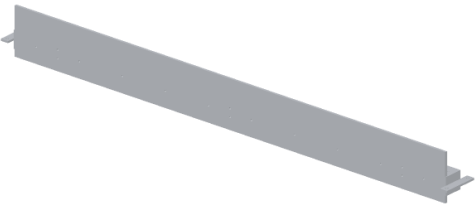

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

One beam: FRP 100 x 100 x 6 mm square tube, cut to 3,000 mm.

Mark a centre line on the front face. Positions are from the middle.

Blade bolt holes, 11 mm through both walls, front to back,

110 mm above the floor line (50 above the beam's underside):

ten holes, 150 to 1,350 mm each side of the middle, 300 apart.

Skid hanger holes, 11 mm through, at the middle and 1,200 each side,


25 and 75 mm above the beam's underside.

End cap holes: 13 mm top to bottom, 74 and 114 mm in from each end,
on the centre line.

Use a sharp HSS or carbide drill, slow, backed with wood; wear a
dust mask (glass fibre). Seal every cut end and hole with resin.

Fit: the blade bolts with stainless crush sleeves inside the tube.

Check: lay the blade on the beam; all holes line up.

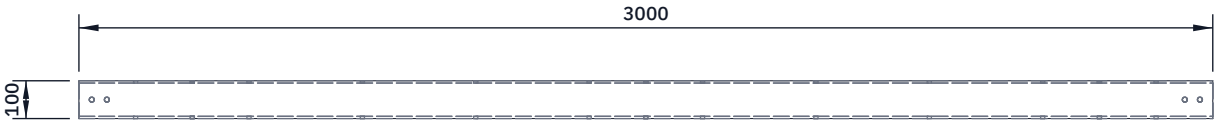

TOP VIEW

Scale 1:20; looking down (along -Z)



FRONT VIEW

Scale 1:20; looking at the front (along +Y)



RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

SALTDRAW

github.com/BoujeeEnjinia1701/saltdrag

SaltDrag rake beam: making sketch

DRAWING NO. SDG-DWG-110			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Pultruded FRP square tube 100 x 100 x 6 mm, 3,000 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand