BUILD PLAN SKETCH, PLAN NOT YET BUILT

SaltDrag · github.com/BoujeeEnjinia1701/saltdrag

REV	DESCRIPTION	DATE	BY
P1	First making sketch (SDG-DDR-002)	2026-10-03	AC
P2	SDG-DEC-001 D17 to D24: STEM check fixes, kit 1.9.1	2026-10-24	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

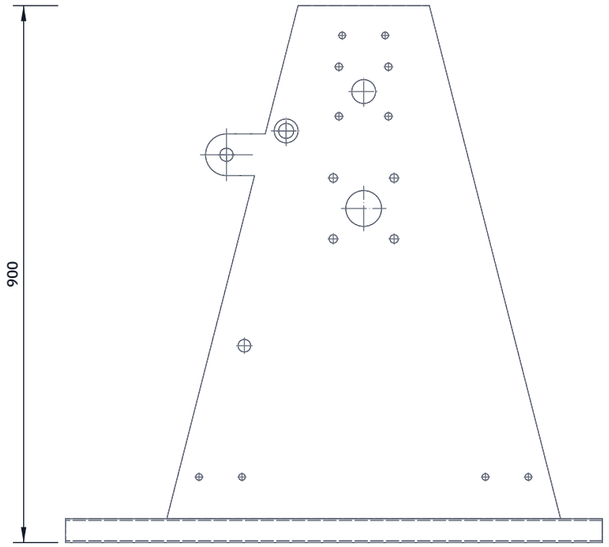

FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

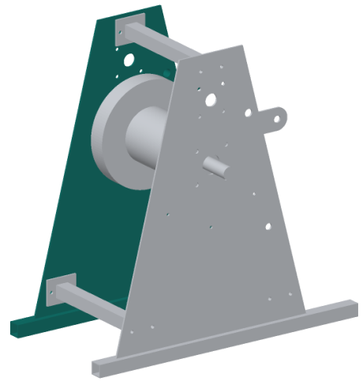

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make 4: two per capstan. Left frames also get the pawl boss.
Cheek: 6 mm plate, 660 wide at the base, 220 at the top, 860 tall; base edge 40 mm up (it sits on the runner).
Ear at the rear: 70 mm tall, round end R35, 22 mm hole 230 behind the drum centre line and 650 mm above the ground.
Drum hole 60 mm at 560 mm up; crank shaft hole 40 mm at 756 mm up.
Bearing bolts: 14 mm holes on a 102 square (drum), 12 mm on an 83 square (crank shaft), centred on each hole.
Cross tube bolts: 11 mm pairs 72 apart at the three tube positions.
Right frames: three 9 mm guard spacer holes, 150 ahead and behind and 120 below the drum centre, and 190 below it.
Pawl bolt 25 mm at 130 back, 690 up; brake pivot 21 mm at 200 back, 330 up. Drill both in all four frames.
Runner: SHS 40 x 40 x 3, 900 long, 400 ahead of and 500 behind the drum centre. Weld the cheek on its centre line, both sides.
Left frames: weld a 40 OD, 24 bore boss 52 long on the outside over the pawl hole. Galvanise after welding and drilling.
Check: the drum and crank shaft holes of a pair line up on a rod.

SALTDRAG

github.com/BoujeeEnjinia1701/saltdrag

SaltDrag capstan side frame (make 4): making sketch

DRAWING NO.	REV	SHEET	SIZE
SDG-DWG-101	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

S275 steel plate 6 mm and SHS 40 x 40 x 3 mm; hot-dip galvanised

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand