



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

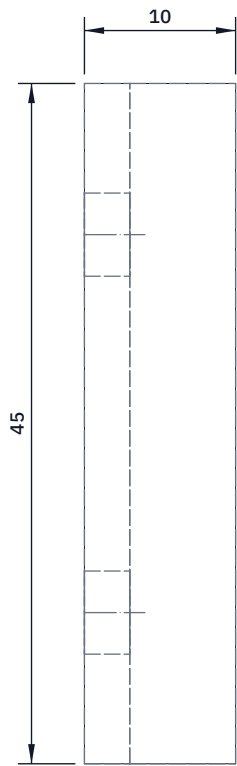


TOP VIEW

Scale 2:1; looking down (along -Z)




FRONT VIEW

Scale 2:1; looking at the front (along +Y)

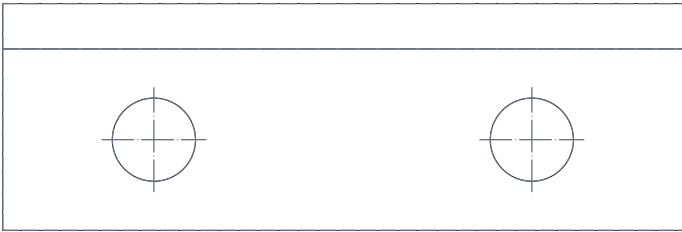

RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

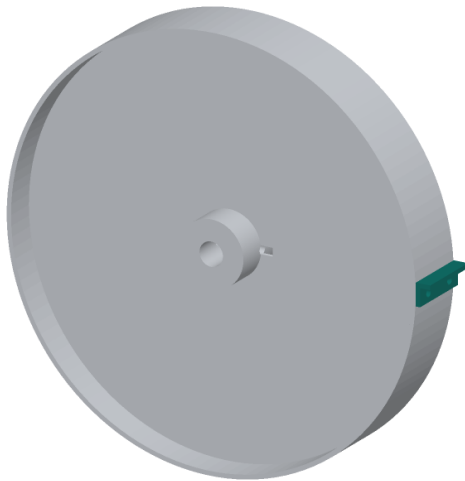

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut eighteen 45 mm lengths of 25 x 3 strip.
Bend each along its length into an L: a 15 mm foot and a 10 mm upstand (inside sizes). A vice and a hammer will do.
Two 5.5 mm holes in the foot, 10 mm from each end, countersunk on the outside for M5 countersunk screws.
Fit: the foot lies flat across the 45 mm rim, upstand outward at the trailing edge, spaced every 20 degrees (about 49 mm round the rim).
Mark the rim through the lug, drill 5.5 mm, fit the screws with the nuts inside the rim and threadlocker. Round the upstand corners.
Lug tips sit on a 300 mm circle: this sets the spacing (942.5 mm per wheel turn).
Check: measure across opposite lug tips: 300 mm, within 2 mm.

SEEDLINE

github.com/BoujeeEnjinia1701/seedline

SeedLine wheel lug (make 18): making sketch

DRAWING NO. SDL-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel strip 25 x 3 mm, bent					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand