

PV-CTL control board

Rev A1 | 2026-10-05 | Schematics authored by Chinmoy Bhuyan | Cost-first PV-P75/100/110 controller: F280039C on BUS-, one trip latch, one SELV barrier

01 PC connector, supply, reset

2x32 PC contract to the power board (all LIVE): only +3V3 is used (200 mA allocated by PV-PWR); TPS3828 reset + 1.6 s watchdog

File: sheets/01_supply.kicad_sch

02 F280039C, clock, debug, EEPROM

TMS320F280039C (100-pin PZ), decoupling, 25 MHz SPXO, cTI-20 JTAG (LIVE), EEPROM, boot straps, command pull-downs, run LED

File: sheets/02_mcu.kicad_sch

03 Reference and analog front ends

REF3030E 3.0 V = VREFHI = VDAC = NTC bias = trip thresholds; IL1-4 gain stages; power-board signals into the ADC through 100 R / 1 nF; 8 NTC biases + inlet NTC

File: sheets/03_afe.kicad_sch

04 Hardware trip comparators

7 x TLV9024 on +3V3 (open drain, no firmware): IL windows from each sensor's Uref; VA / VB over-voltage, NTC over-temperature and open probe from VREF ladders

File: sheets/04_trip.kicad_sch

05 Trip latch, watchdog, gating

74LVC07 wired-AND of every trip source -> PRE_N -> 74LVC1G74 latch (no firmware); heartbeat monoflop; 74LVC08 gating of 16 PWM, EN, K_A, K_B, K_PRE, STATUS, FAN

File: sheets/05_latch.kicad_sch

06 Barrier B1: isolators, CAN, RS-485

Reinforced barrier B1: CA-IS3050W CAN, CA-IS3082WNX RS-485, 2 x CA-IS3821LG, CA-IS3820LG; bus TVS, jumper terminations, pluggable field terminals (SELV)

File: sheets/06_iso.kicad_sch

07 SELV supply, fans, enable / status

SELV 24 V input (AUX-T1 reinforced winding, 12-36 V), TPS54360B 5 V and fan supply, 3 fan headers + tach, ENABLE / STATUS terminal, SELV 0 V to PE


File: sheets/07_selv.kicad_sch

ARCHITECTURE-COSTFIRST sections 6.1 (trip sources -> one latch), 10 (two zones); PC levels as built on PV-PWR (hardware/PV-PWR/outputs/PV-PWR_design_check.txt).
Assembly option: the two TLV9024 marked 'PV-P100/110 only' are not fitted on PV-P75 (bom/PV-CTL-P75_BOM.csv).
Pin plan: gen/data/pv_ctrl_pin_plan.csv (from SPRSP61C, checked every build).

Not bench-validated. All bands and budgets calculated in design_check().
Sheet 1
Schematics authored by Chinmoy Bhuyan
LIVE zone = BUS- (hazardous live); SELV zone behind reinforced barrier B1


Sheet: / File: PV-CTL.kicad_sch		
Title: PV-CTL control board - Cover / Hierarchy		
Size: A3	Date: 2026-10-05	Rev: A1
KiCad E.D.A. 10.0.6		Id: 1/8

PC CONNECTOR (GEN/INTERFACES.PY PC; AGND = GND ON THIS BOARD)

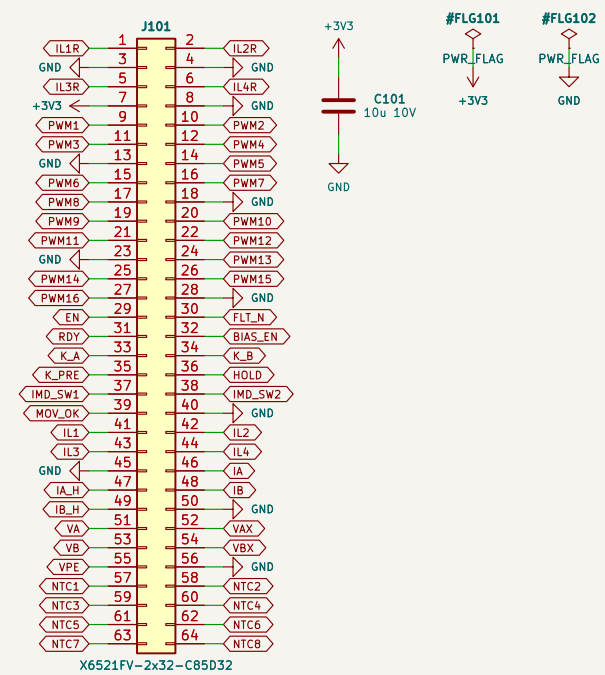

LIVE: GND = AGND = BUS-; nothing on this connector leaves the enclosure. Only +3V3 comes across (the former +24V / +5V pins carry the sensor references IL1R-IL4R since PV-PWR rev A2). +3V3 feeds the MCU, so the power board's 3.3 V signals and VDDIO share one rail and one power-up order (no back-powering).

RESET AND WATCHDOG (TPS3828-33)

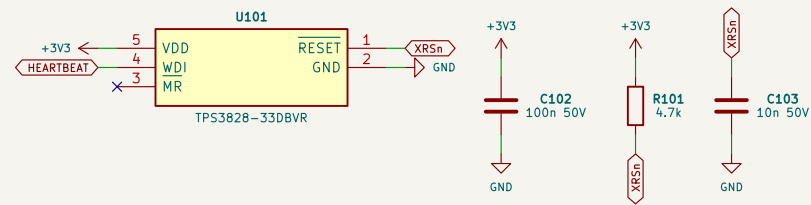

RESET (open drain) holds XRSn below 2.93 V and for 200 ms after; no WDI edge for 0.9-2.5 s -> reset. XRSn 4.7k pull-up and 10 nF (SPRSP61C table 5-1: 2.2-10k, <= 100 nF). XRSn also clears the heartbeat monoflop, so every MCU reset sets the trip latch. +5V / +24V supervision: on the power board (RDY).


Not bench-validated. All bands and budgets calculated in design_check().
Sheet 2
Schematics authored by Chinmoy Bhuyan
LIVE zone = BUS- (hazardous live); SELV zone behind reinforced barrier B1

Sheet: /01 PC connector, supply, reset/
File: 01_supply.kicad_sch

Title: PV-CTL control board - PC connector, supply, reset


Size: A3	Date: 2026-10-05	Rev: A1
KiCad E.D.A. 10.0.6		Id: 2/8

F280039CSPZR

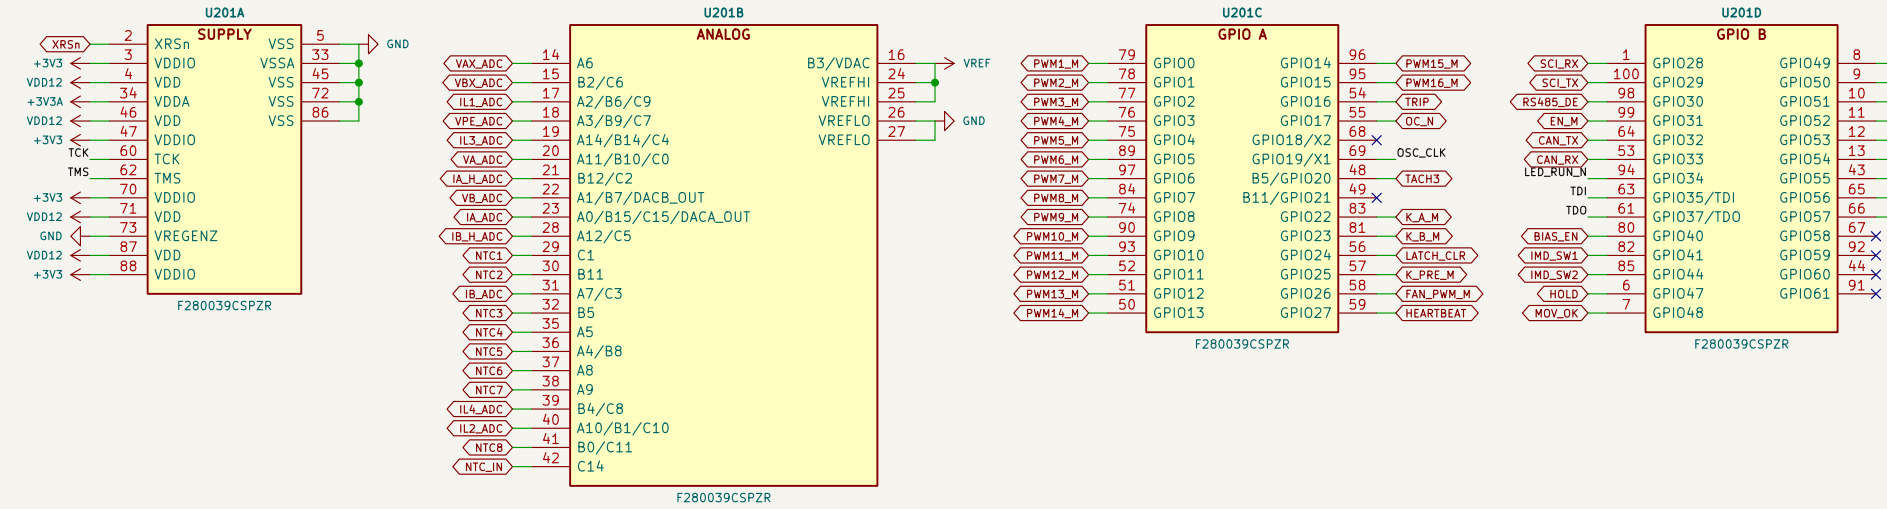


Pins as gen/data/pv_ctrl_pin_plan.csv (checked against SPRSP61C table 5-1 on every build). VREGENZ = GND; internal 1.2 V VREG; VDD only decoupled.

DECOUPLING (SPRSP61C 6.12.1.5.1)

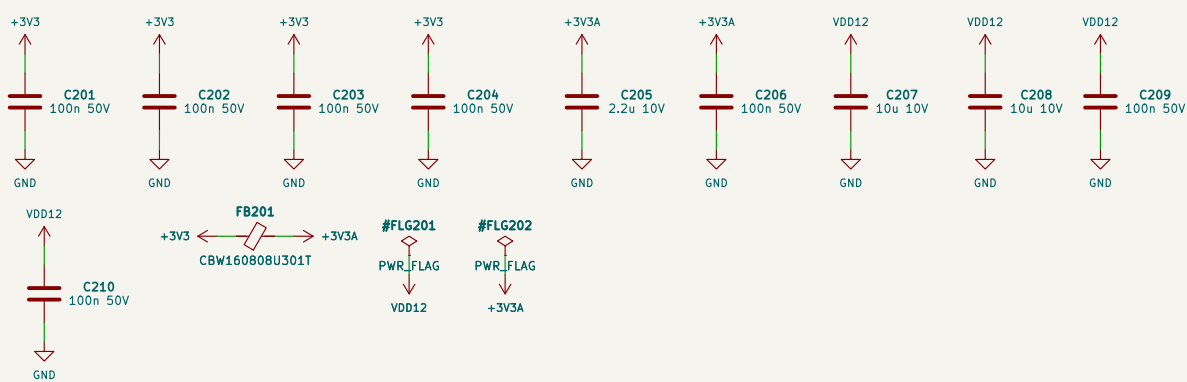


VDDIO 4 x 100 nF (>= 0.1 uF per pin); VDDA 2.2 uF + 100 nF behind a 300 R bead (pi filter allowed by 6.12.1.A.1); VDD 2 x 10 uF + 2 x 100 nF = 20.2 uF (10-26.6 uF total, internal VREG, 10 % parts).

25 MHZ CLOCK (X1 SINGLE-ENDED)

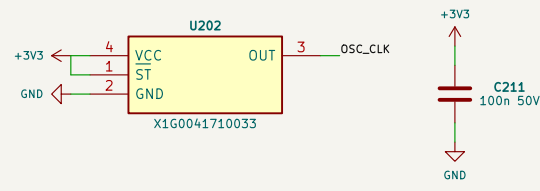


SG-2105TF +/-50 ppm (CAN bit timing; CAN boot needs the external clock). f(X1) 10-25 MHz, tr/td <= 6 ns (SPRSP61C 6.12.3.2.1).

JTAG CTI-20 - HAZARDOUS LIVE (ISOLATED PROBE ONLY)

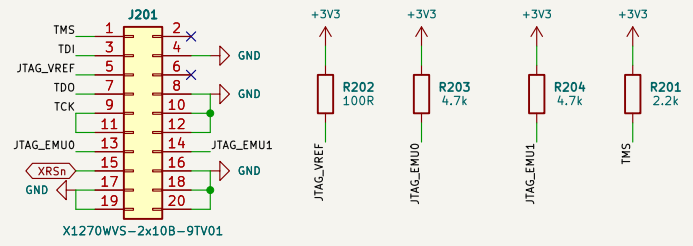


Label: 'HAZARDOUS VOLTAGE - up to 1000 V DC to earth - Isolated debug probe only'. TMS 2.2k pull-up (no TRSTn on F28003x, table 5-1); TRST (2) open; EMU0/1 4.7k pull-up; RESET (15) on XRSn; 17-19 GND. Field firmware update over CAN (DCAN boot option 1 or application loader); no live access needed.

EEPROM (CALIBRATION, SERIAL NUMBER, EVENT LOG)

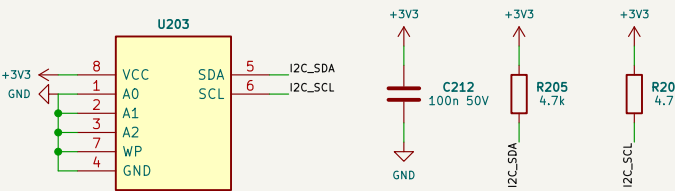


BL24C256A at 0x50 (A2-A0 low). WP low (writable; firmware guards the calibration pages). I2C 4.7k pull-ups.

BOOT STRAPS




Flash boot = GPIO24 high and GPIO32 high at reset (SPRSP61C table 7-8); 10k pull-ups on LATCH_CLR (GPIO24) and CAN_TX (GPIO32; also recessive while the MCU is in reset).

COMMAND PULL-DOWNS (6 X 4 X 10K ARRAYS)

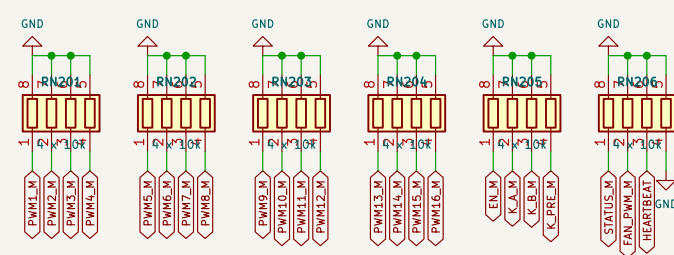

Every MCU output that ends in an AND gate here is low while the MCU is in reset or unprogrammed (GPIOs high impedance); 16 PWM_EN, K_A, K_B, K_PRE, STATUS, FAN_PWM, HEARTBEAT (23 lines, 1 spare element). BIAS_EN, IMD_Sw1/2 go straight to PC; pulled down on the power board (10k / 100k, PV-PWR).

RUN LED



Green, GPIO34 low = on (firmware heartbeat), 680 R; ~2 mA.

Not bench-validated. All bands and budgets calculated in design_check().
Sheet 3
Schematics authored by Chinmoy Bhuyan
LIVE zone = BUS- (hazardous live); SELV zone behind reinforced barrier B1


Sheet: /02 F280039C, clock, debug, EEPROM/
File: 02_mcu.kicad_sch

Title: PV-CTL control board - F280039C, clock, debug, EEPROM

Size: A2 Date: 2026-10-05 Rev: A1


KiCad E.D.A. 10.0.6 Id: 3/8

3.0 V REFERENCE (REF3030E FROM +3V3A)

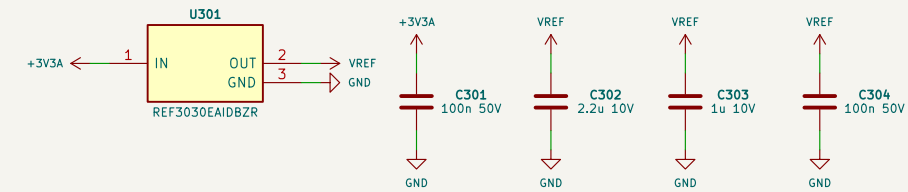


Feeds VREFHI (pins 24/25, >= 2.2 uF), VDAC (pin 16, >= 1 uF), the NTC biases, the IL offset and the threshold ladders of sheet 04; ADC, CMPSS and hardware trips are ratiometric to one reference. It runs from VDDA, so it never sits above VDDA (SPRSP61C 6.12.1.4.2). Needs +3V3 >= 3.20 V (REF30E dropout).

INDUCTOR-CURRENT FRONT ENDS IL1-IL4 (TLV9064 GAIN STAGES)

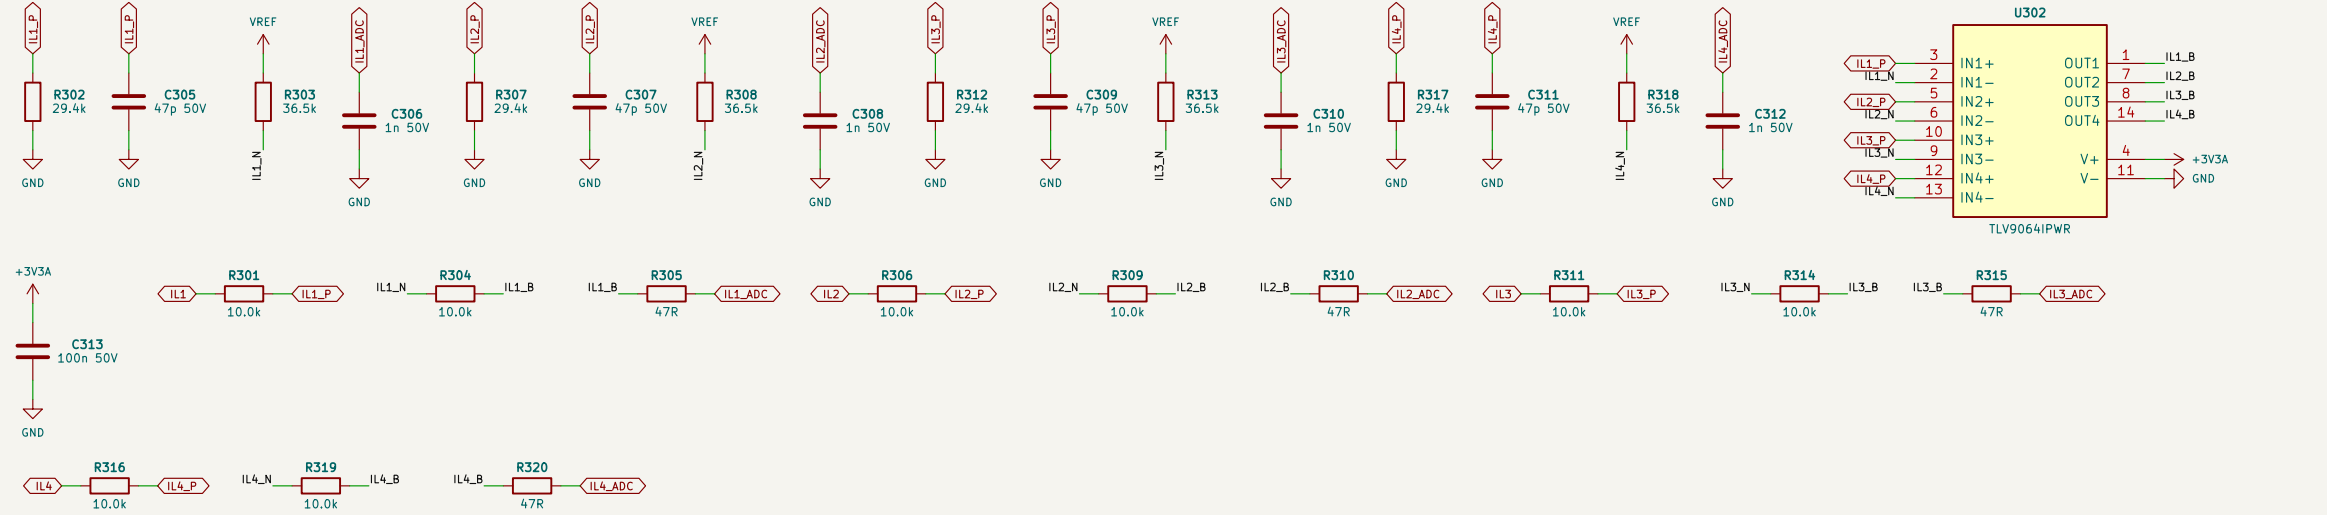


ILn = 2.5 V + 10.667 mV/A (STK-H0/A 75 on PV-PWR, 0.5-4.5 V, not-ratiometric) -> 10.0k / 29.4k 0.1 %
-> ILn_P (47 pF, a = 0.740); trip window (sheet 04) and the + Input; Rg 36.5k to VREF; Rf 10.0k; ADC = 1.555 V + 10.14 mV/A (0.072 A/LSB, -153...+142 A) -> 47 R / 1 nF -> ADC + CMPSS; IL4 = 0 V on PV-P75.

POWER-BOARD ANALOG SIGNALS (VMID 1.641-1.651 V PER PORT, NOT ON PC)

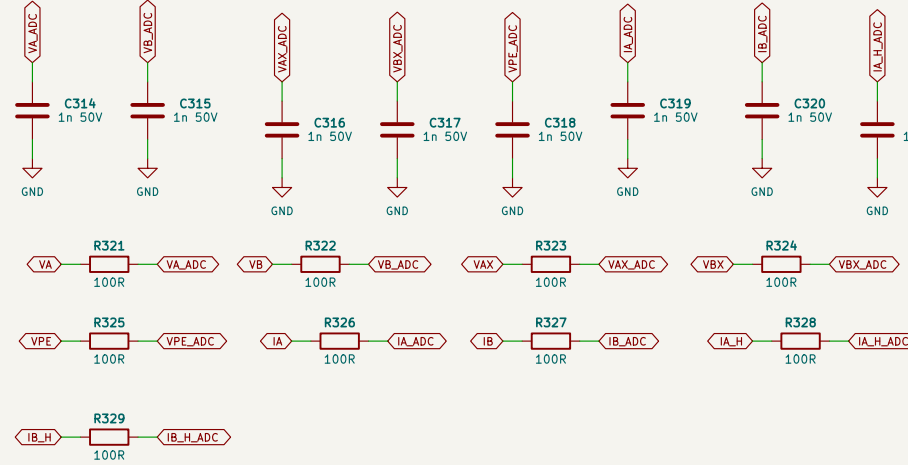


VA/VB/VAX/VBX/VPE = VMID + V/1203; IA/IB = VMID + 3.0 mV/A (+/-478 A); IA_H/IB_H = VMID + 1.0 mV/A. Anti-alias poles are on the power board: here 100 R / 1 nF CGO as the ADC charge bucket. The trip comparators take the PC net itself (no ADC kick-back on them).

NTC INPUTS (10 K B25/100 3988 K TO AGND + 100 NF ON PV-PWR, BIASED HERE FROM VREF)

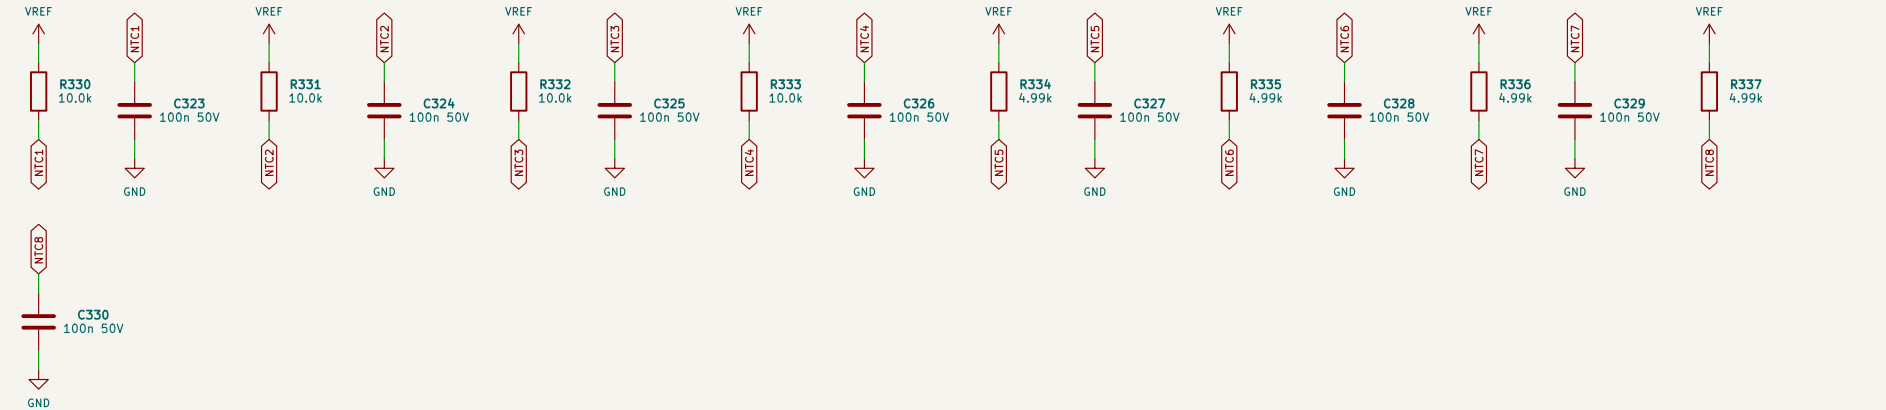

NTC1-4 heatsink sections (10.0k). NTC5-8 Inductor windings (4.99k), 100 nF each. Open probe = 3.0 V; trips through the open-probe comparators (sheet 04); short = 0 V; trips as over-temperature.

INLET-AIR NTC (ON BOARD)

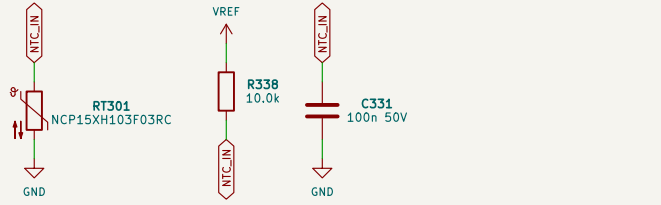

Murata NCP15XH103F03RC, 10.0k from VREF; ADC only (fan law, derating).


Not bench-validated. All bands and budgets calculated in design_check().
Sheet 4
Schematics authored by Chinmoy Bhuyan
LIVE zone = BUS- (hazardous live); SELV zone behind reinforced barrier B1

Sheet: /03 Reference and analog front ends/
File: 03_afe.kicad_sch

Title: PV-CTL control board - Reference and analog front ends


Size: A2 Date: 2026-10-05 Rev: A1
KiCad E.D.A. 10.0.6 Id: 4/8

IL THRESHOLD LADDERS (0.1 %, 25 PPM/K). ONE PER PHASE FROM THAT SENSOR'S UREF (ILNR ON PC)

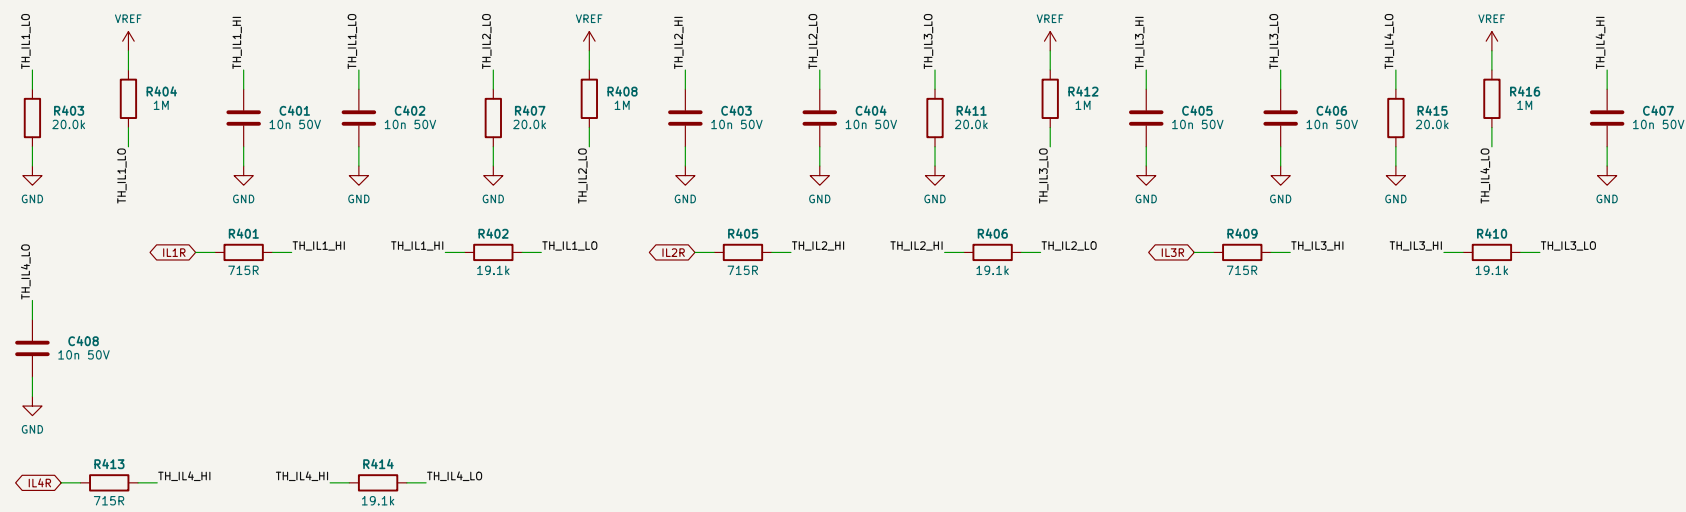


ILnR = 715R - TH_ILn_HI - 19.1k - TH_ILn_LO - 20.0k - GND; the window follows the sensor's own zero (Vref 2.48-2.52 V is no longer an error term; Vref +/- 0 mV is), 1 M from VREF to TH_ILn_LO, with the sensor dead (IL = ILR = 0 V) TH_ILn_LO stays -30 mV above ILn_P and the phase trips. Phase 4: fitted on every build.

THRESHOLD LADDERS (0.1 %, 25 PPM/K, FROM VREF)

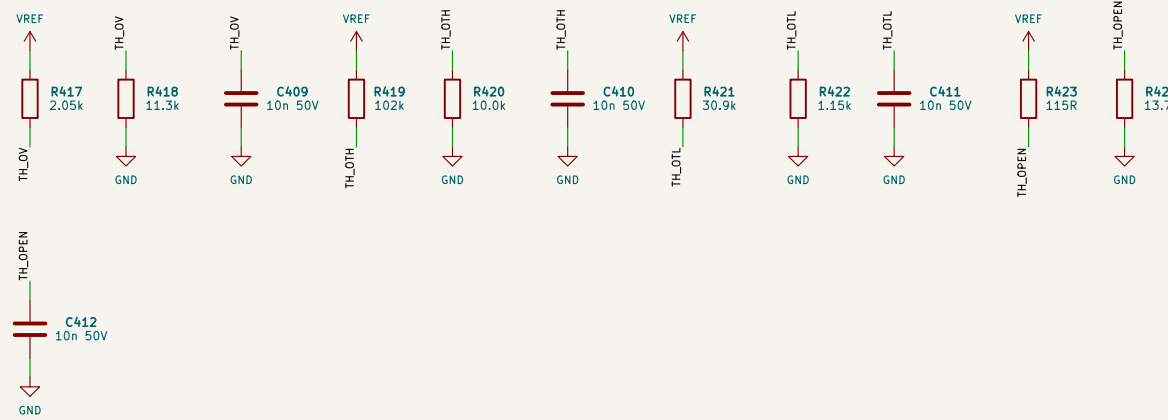


TH_LOV: VA/VB 1075 V; TH_OTH: heatsink 87.9 C (PV-PWR: <= 89.9 C); TH_OTL: Inductor 150 C; TH_OPEN 2.975 V: an NTC node above it is an open probe (cold limit -30 C).

PHASES 1-3 AND THE PORT VOLTAGES (FITTED ON EVERY BUILD)

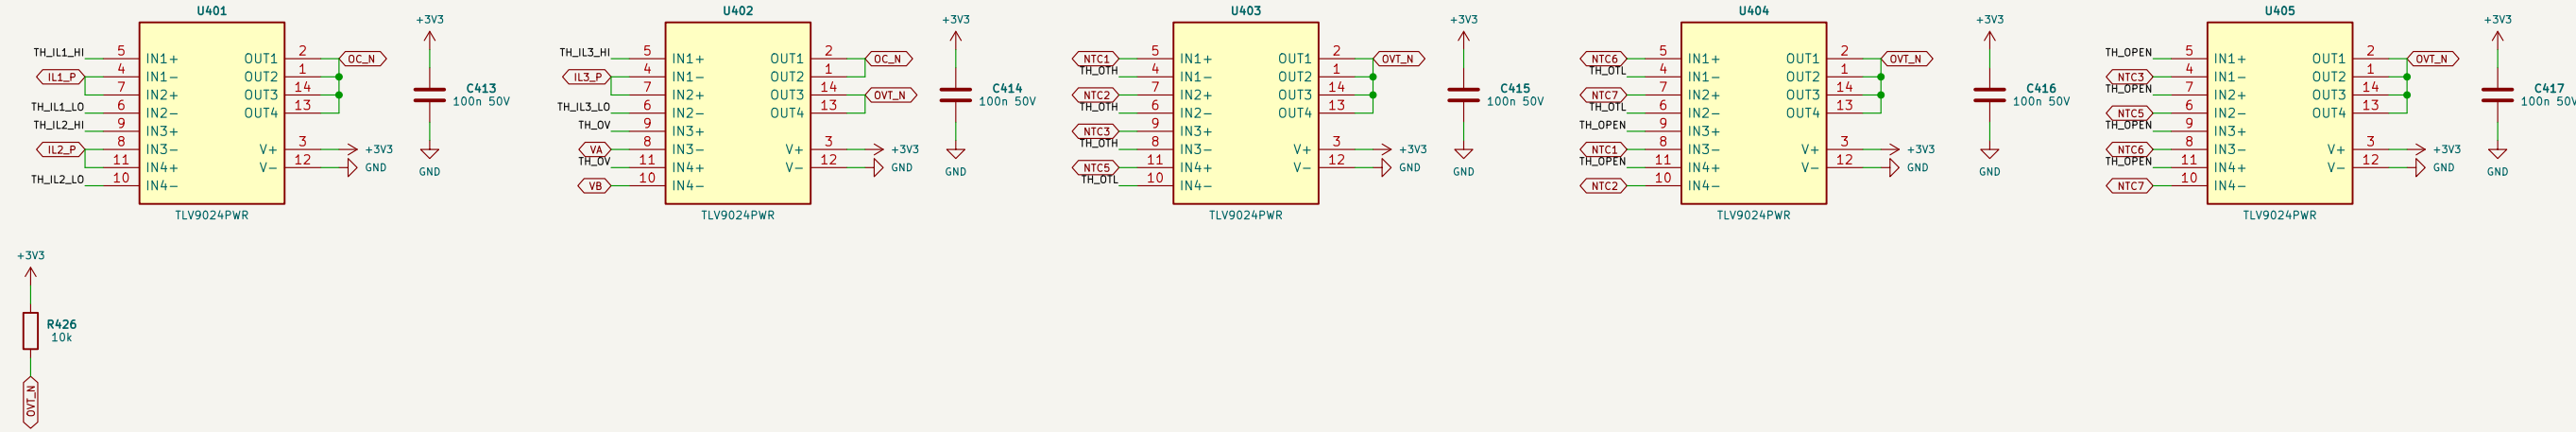

OC_N (wired-OR, 10k to +3V3): ILn_P above TH_ILn_HI or below TH_ILn_LO, n = 1-3. OVT_N (10k): VA, VB above TH_LOV; NTC1-3 (heatsink) below TH_OTH; NTC5-7 (inductor) below TH_OTL; any of them above TH_OPEN. Port over-current (387-413 A) arrives on FLT_N from the power board's own comparators (PV-PWR).

PHASE 4 - ASSEMBLY OPTION: FITTED ON PV-P100/110 ONLY

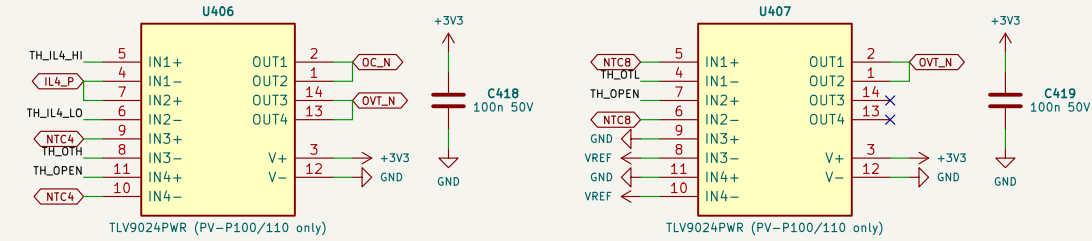

IL4 window, NTC4 / NTCB over-temperature and open probe. Not fitted on PV-P75 (bom/PV-CTL-P75_BOM.csv), where IL4 = 0 V and NTC4 / NTCB are open; nothing then pulls OC_N / OVT_N for phase 4. Fitted on a 4-phase build, a dead IL4 sensor (0 V) or an open NTC4 / NTCB trips (fail-safe). Firmware cross-checks.


Not bench-validated. All bands and budgets calculated in design_check().
Sheet 5
Schematics authored by Chinmoy Bhuyan
LIVE zone = BUS- (hazardous live); SELV zone behind reinforced barrier B1

Sheet: /04 Hardware trip comparators/
File: 04_trip.kicad_sch

Title: PV-CTL control board - Hardware trip comparators


Size: A2 Date: 2026-10-05 Rev: A1
KiCad E.D.A. 10.0.6 Id: 5/8

TRIP SOURCES --> PRE_N (OPEN-DRAIN WIRED-AND, 4.7K TO +3V3)

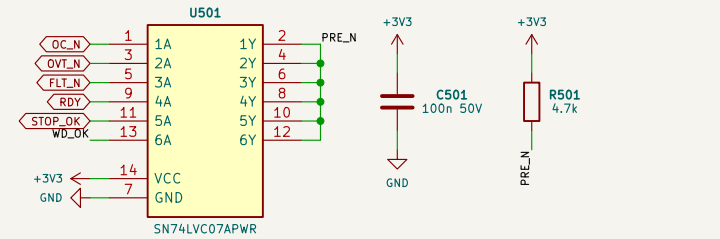


74LVC07 (loff, 5 V tolerant): DC_N, OVT_N, FLT_N (driver DESAT/UVLO + port OC of PV-PWR), RDY (gate supplies, +5V, live 24 V on PV-PWR), STOP_OK (ENABLE), WD_OK (heartbeat and MCU reset). Any low -> PRE_N low -> latch set asynchronously (Q = TRIP = 1).

THE LATCH (74LVC1G74, SET-DOMINANT)

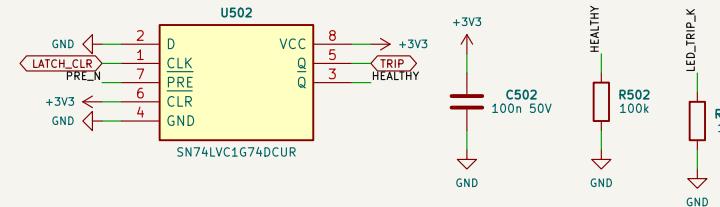


PRE = PRE_N, CLR tied high, D = GND, CLK = LATCH_CLR (GPIO24). A firmware rising edge loads 0 (clears) only while PRE_N is high (no source active); with any source active PRE wins (Table 9-1). Q = TRIP (red LED, INPUT/SAFETY -> T23), Q-bar = HEALTHY (gate). Unpowered: loff -> HEALTHY reads 0 (100%).

HEARTBEAT WATCHDOG (74LVC1G123)

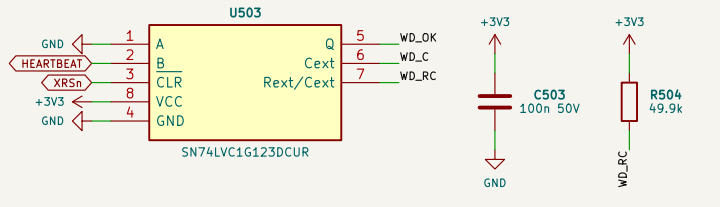


B = HEARTBEAT (rising edges from the control ISR, >= 500 Hz). A = GND, CLR = XRSn, Q = WD_OK stays high while edges come faster than tw = 49.9k x 100n (4.7-5.8 ms); no edge, a stuck pin or any MCU reset (XRSn low) -> WD_OK low -> latch. Rext to VCC, Cext between Cext and Rext/Cext (SCE586E table 4-1).

CONTACTOR GATE: KGATE = HEALTHY OR HOLD (74LVC1G32)

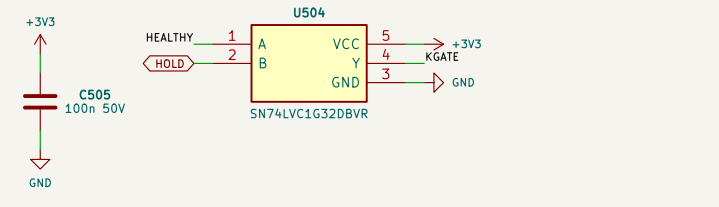


A trip drops K_PRE at once, but K_A / K_B only while HOLD is low; while the power board holds a contactor (port current above its breaking limit) this board never commands it open; the power board's coil interlock enforces the same. Closing still needs the MCU command AND (HEALTHY OR HOLD).

GATING: 6 X 74LVC08 (22 GATES USED, 2 SPARE WITH INPUTS GROUNDED)

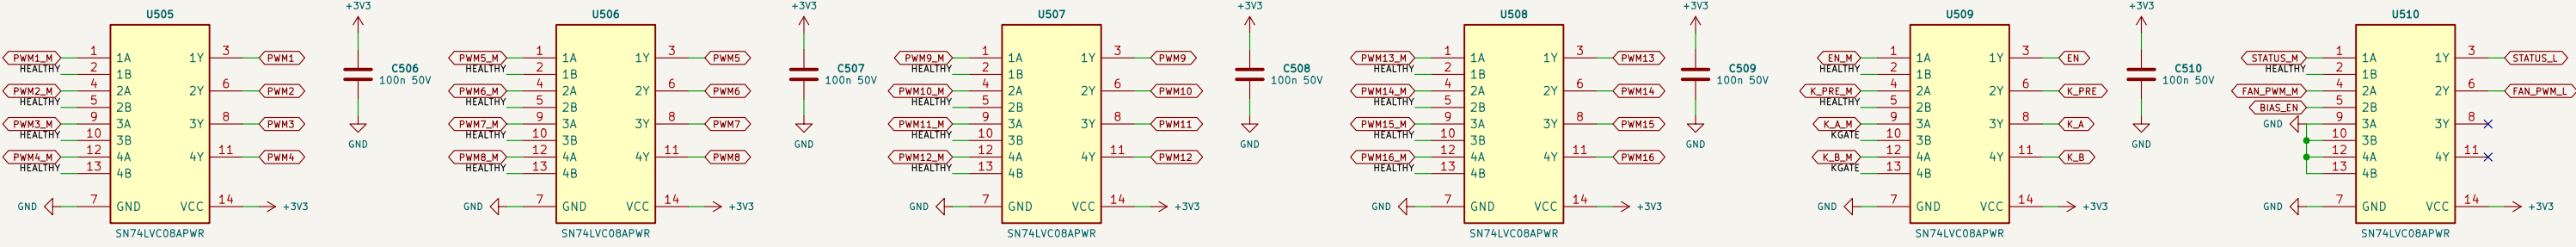

PWMin = PWMn_M and HEALTHY (16). EN = EN_M and HEALTHY, K_PRE = K_PRE_M and HEALTHY, K_A/K_B = K_n_M and KGATE, STATUS_L = STATUS_M and HEALTHY, FAN_PWM_L = FAN_PWM_M and BIAS_EN (PV-PWR rule: fans only while the gate bias loads the aux supply). The power board pulls every PC input low (10k / 100k).

POWER-BOARD STATUS LINES (PV-PWR AS BUILT)

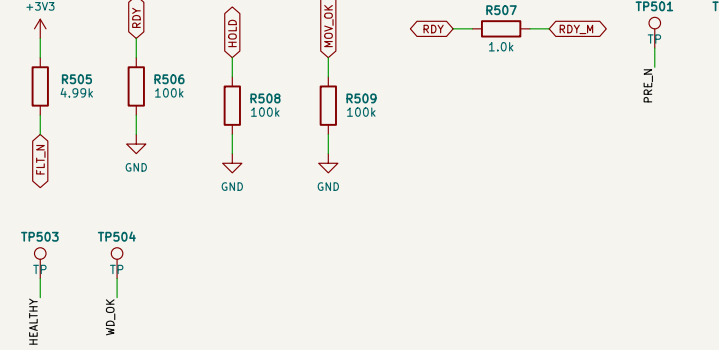

FLT_N: open drain on PV-PWR, pulled up HERE (4.99k, PV-PWR recommendation). RBY: open drain pulled up on PV-PWR (no pull-up here, 100k pull-down allowed), to the MCU via 1k. HOLD: push-pull. MCU_OK: open drain with 10k on PV-PWR; 100k pull-downs define an unplugged cable (not held / monitor open).

Not bench-validated. All bands and budgets calculated in design_check().
Sheet 6
Schematics authored by Chinmoy Bhuyan
LIVE zone = BUS- (hazardous live); SELV zone behind reinforced barrier B1

Sheet: /05 Trip latch, watchdog, gating/
File: 05_latch.kicad_sch

Title: PV-CTL control board - Trip latch, watchdog, gating


Size: A2 Date: 2026-10-05 Rev: A1

KiCad E.D.A. 10.0.6 Id: 6/8

BARRIER B1 RULES (INSULATION_SPEC 'REINFORCED HV-PELV, DC POLE')


Every part on this sheet that touches LIVE and SELV is a declared isolator: VIOSM >= 8 kV, VISO = 5 kVrms, VIOWM >= 1414 V DC, CLR/CPG 8 mm, 8 mm < 10 mm (PD2 creepage) -> conformal coating PD1 over the B1 zone is MANDATORY; routed out under every isolator; SELV copper >= 10 mm from LIVE copper elsewhere.

ISOLATED CAN (BMS / PCS), CA-IS3050W

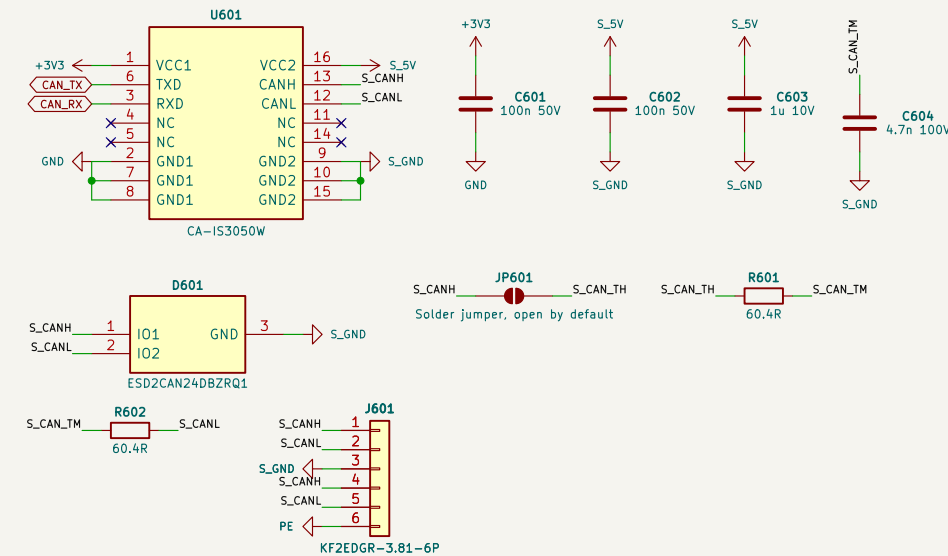


Logic side +3V3 (ICC1 <= 3.6 mA), bus side S_5V (ICC2 <= 73 mA dominant): no live +5V needed. Split termination 2 x 60.4 R + 4.7 nF by JP; ESD2CAN24 to SELV 0 V. Terminal: CANH, CANL, 0 V, CANH, CANL (in / out), shield to PE.

ISOLATED RS-485, CA-IS3082WNX

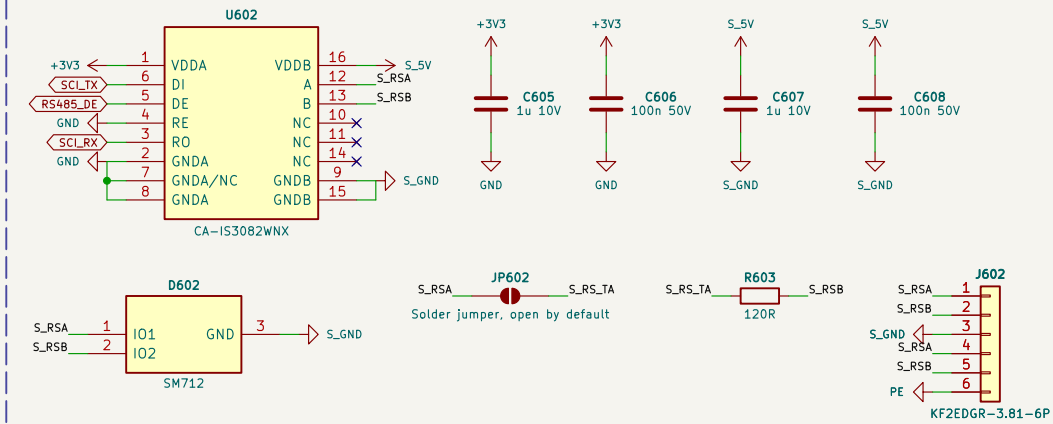

Logic side +3V3; bus side S_5V. DE from the MCU (internal pull-down: driver off in reset), RE tied low (receiver always on, fail-safe). 120 R by JP; SM712 to SELV 0 V. Terminal: A, B, 0 V twice, shield.

DIGITAL ISOLATORS (DEFAULT LOW = SAFE)

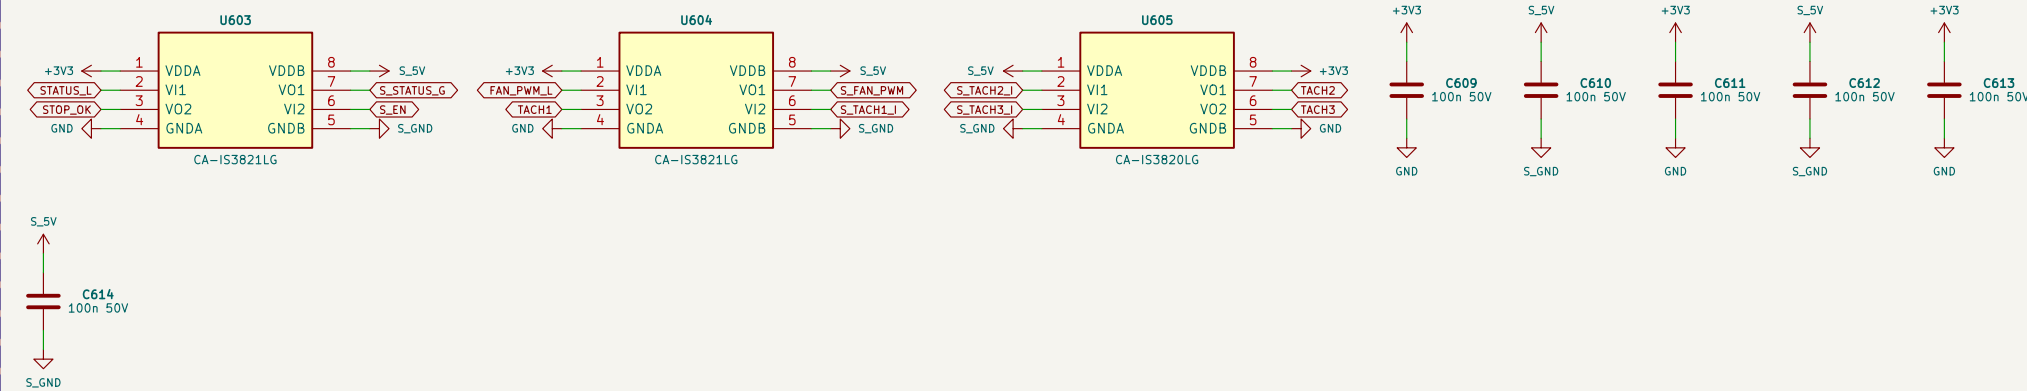

3821 #1: STATUS_L -> S_STATUS_G (out), S_EN -> STOP_OK (in: SELV side unpowered or open = STOP).
3821 #2: FAN_PWM_L -> S_FAN_PWM (out; unpowered = fans off), S_TACH1_L -> TACH1. 3820 (A side SELV).
S_TACH2_L, S_TACH3_L -> TACH2, TACH3. 100 nF per side.

Not bench-validated. All bands and budgets calculated in design_check().
Sheet 7
Schematics authored by Chinmoy Bhuyan
LIVE zone = BUS- (hazardous live); SELV zone behind reinforced barrier B1


Sheet: /06 Barrier B1: isolators, CAN, RS-485/
File: 06_iso.kicad_sch

Title: PV-CTL control board – Barrier B1: isolators, CAN, RS-485

Size: A3	Date: 2026-10-05
----------	------------------


KiCad E.D.A. 10.0.6

SELV INPUT (2-PIN, DOUBLE-INSULATED LEADS, >= 10 MM FROM LIVE COPPER)

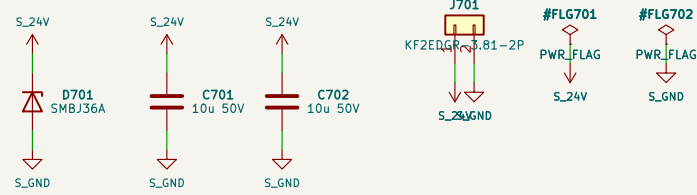


AUX-T1 fan winding, cross-regulated: 12-36 V (sags to -15 V without gate-bias load, PV-PWR), SMBJ36A clamp (36 V working), 2 x 10 uF 50 V. Both bucks have no under-voltage lock-out above 4.5 V.

SELV 5 V (TPS54360B, 500 KHZ)

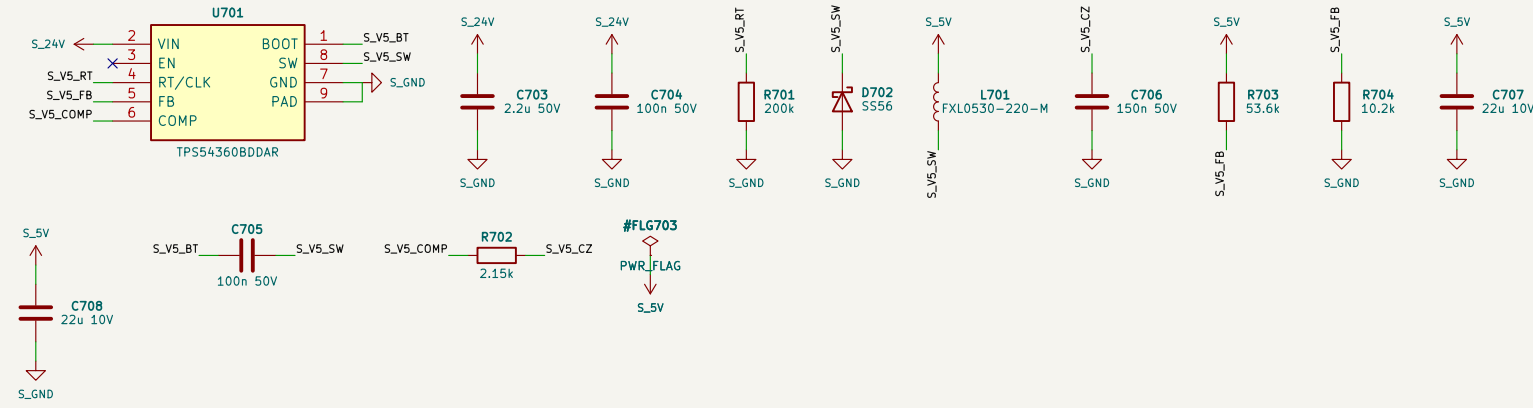


CAN and RS-485 bus sides, SELV side of the three digital isolators: EN floating = on (internal pull-up), 22 uH, 2 x 22 uF.

FAN SUPPLY (TPS54360B, 300 KHZ): SPEED BY VOLTAGE, PASSES WHAT THE WINDING GIVES

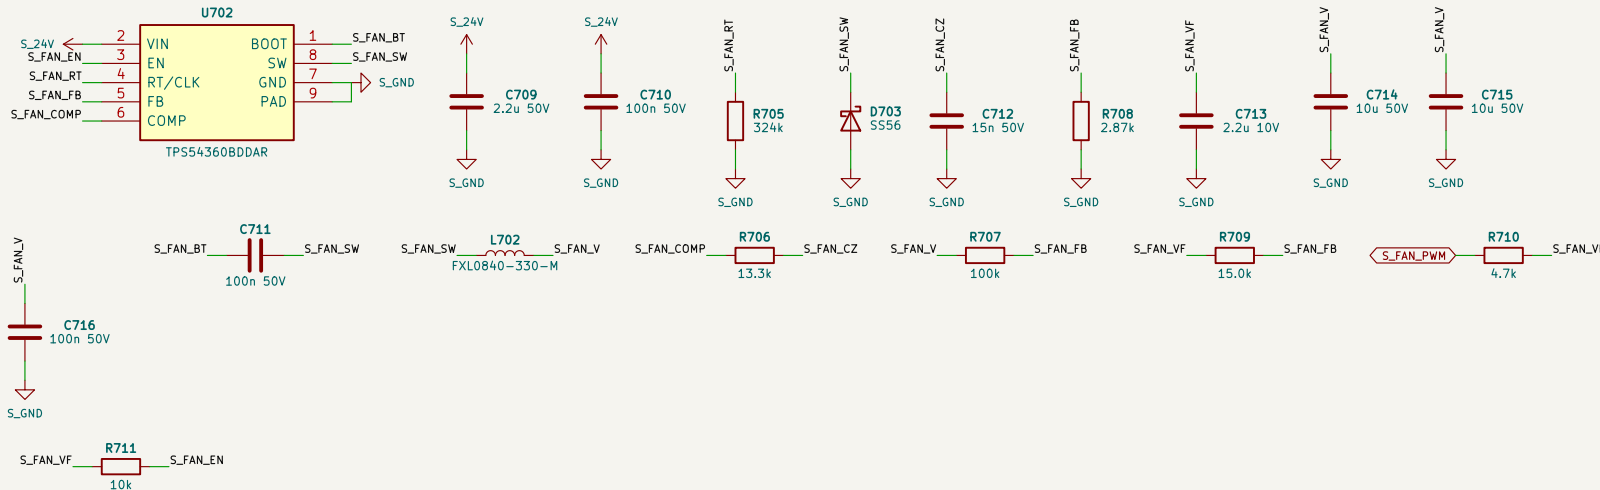


S_FAN_PWM (isolated, 0/5 V) -> 4.7k / 2.2 uF -> S_FAN_VF: EN via 10k (off below 1.1-1.3 V; duty below -25 %; static low or a dead live side = fans OFF) and current injection into FB through 15.0k; higher duty = lower voltage (24 V ... 7 V); at a low input it runs in dropout. Rtop 100k / Rbot 2.87k.

FAN 1

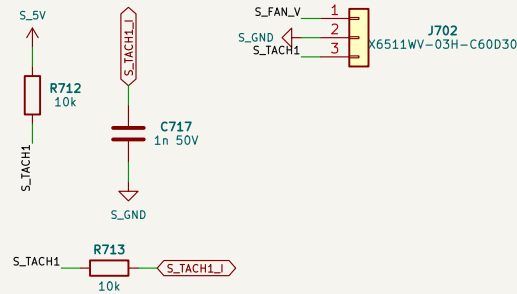


1 +V, 2 0 V, 3 tach: 10k to S_5V, 10k + 1 nF (10 us) to the Isolator Input.

FAN 2

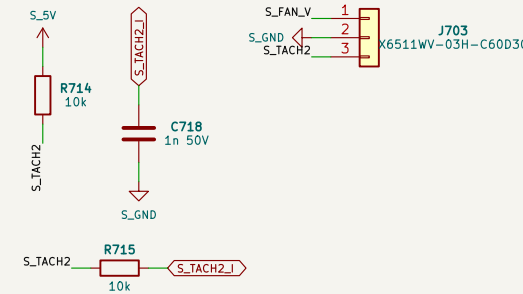


1 +V, 2 0 V, 3 tach: 10k to S_5V, 10k + 1 nF (10 us) to the Isolator Input.

FAN 3

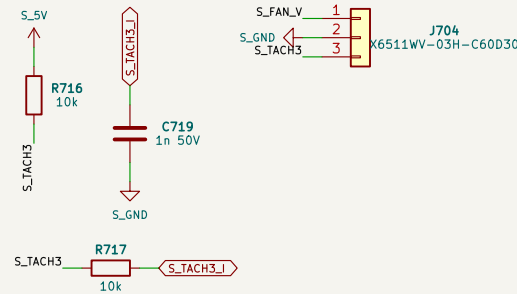


1 +V, 2 0 V, 3 tach: 10k to S_5V, 10k + 1 nF (10 us) to the Isolator Input.

ENABLE (EXTERNAL STOP) AND STATUS TERMINAL

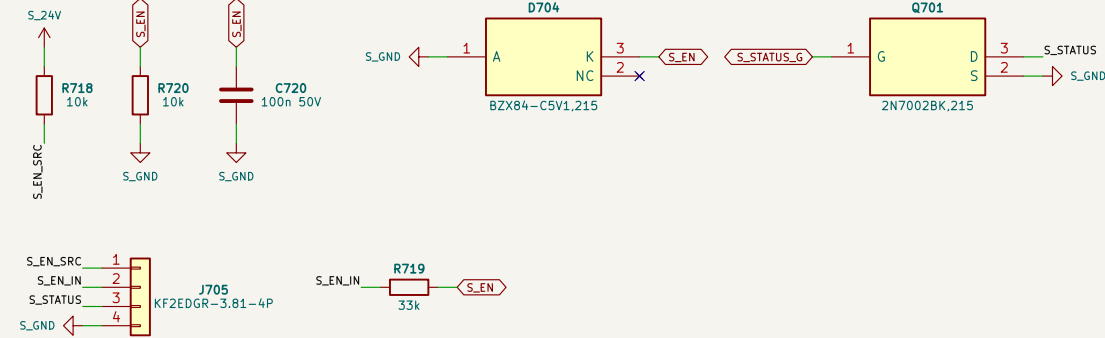

1 S_EN_SRC (S_24V via 10k; dry-contact supply), 2 S_EN_IN (contact return or a PLC output), 3 STATUS (open drain 2N7002BK; conducting = healthy), 4 0 V, S_EN_IN -> 33k / 10k (S_L V clamp, 100 nF; 0.77 ms) -> Isolator: open contact, broken wire or lost SELV = STOP_OK low = latch set (no firmwares).

SELV 0 V TO PE (SELV MAY BE EARTHED BY THE INSTALLER: PELV)

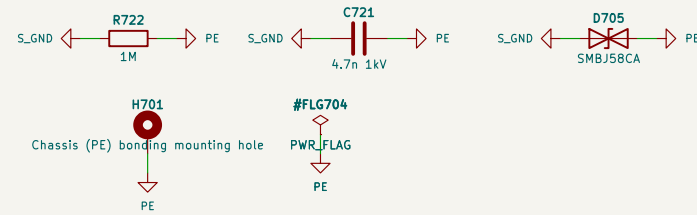

1 M || 4.7 nF 1 kV plus SMBJ58CA: a common-mode surge on the field cables is clamped to PE: a solid PELV bond by the installer is harmless. Plated MS hole = PE / shield bond near the terminals.

Not bench-validated. All bands and budgets calculated in design_check().
Sheet 8
Schematics authored by Chinmoy Bhuyan
LIVE zone = BUS- (hazardous live); SELV zone behind reinforced barrier B1

Sheet: /07 SELV supply, fans, enable / status/
File: 07_selv.kicad_sch

Title: PV-CTL control board - SELV supply, fans, enable / status

Size: A2 Date: 2026-10-05

Rev: A1

KiCad E.D.A. 10.0.6

Id: 8/8