



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the TRL 3 model (SDL-CAL-001)	2026-09-25	AC

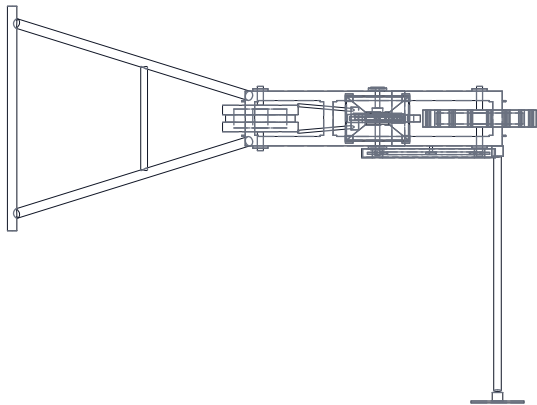


TOP VIEW
Scale 1:20

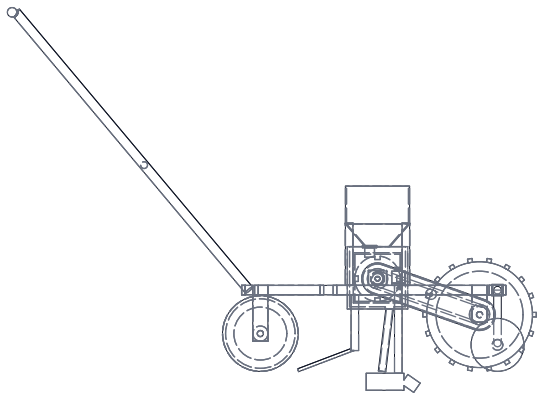

FRONT VIEW
Scale 1:20

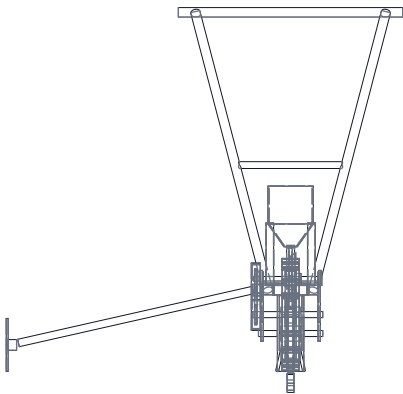

RIGHT VIEW
Scale 1:20

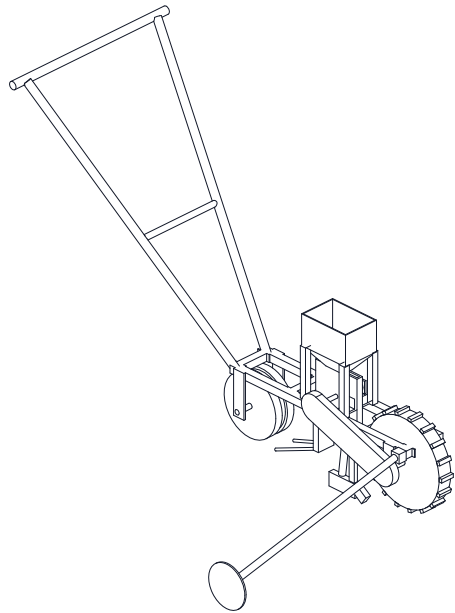

ISOMETRIC VIEW
Not to scale; marker deployed

KEY DIMENSIONS (MM) AND DATA

Overall 1399 L x 1050 W x 1018 H (marker at 750)
Drive wheel 300 dia x 45, 18 lugs; press wheel 200 x 70
Wheelbase 580; plate shaft 270 behind drive axle, 245 high
Chain #35, centers 286; plate 15 T; wheel 12, 15 or 18 T
Plate 120 dia; maize cells 4 x 14.3 long x 8.7 deep; t = 6
Rails 25 sq x 1.5 at 120 centers, 215 high
Opener depth 50 shown; 10 to 60 in 10 mm steps
Grip 950 high (850 to 1,050); handle 50 deg
Hopper 2.4 L; marker reach 200 to 900
Mass 14.6 kg base, 15.6 kg with marker (SDL-CAL-001)
Chain guard must be fitted in use
PRELIMINARY, NOT FOR FABRICATION

SEEDLINE

General arrangement, TRL 3 model

DRAWING NO. SDL - DWG - 001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Bolted 25 x 25 x 1.5 steel tube frame; PETG printed plate, housing, hopper; #35 chain. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com				Generated from cad/src; do not edit by hand	