
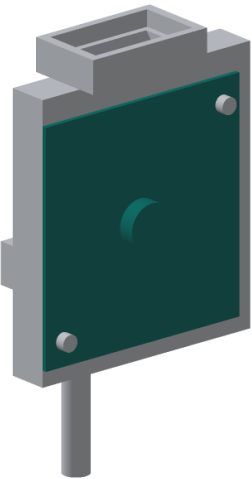
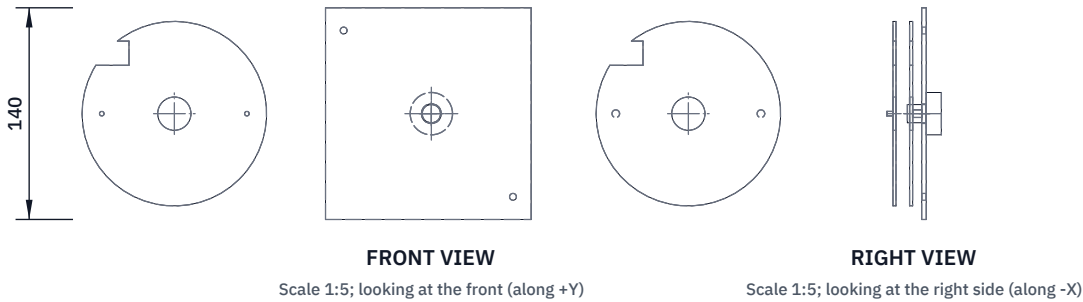


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	SDL-DEC-001: 13 mm slot, plate liners, UV-stabilized door	2026-10-02	AC

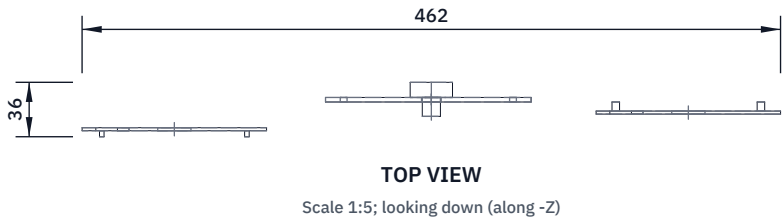

HOW TO MAKE IT AND HOW IT FITS

Door: cut 136 x 140 mm from 3 mm UV-stabilized clear polycarbonate (score and snap, or a fine saw); round the corners 5 mm; keep the film on to drill.
13 mm hole for the knob stem, 70 mm from the rear edge, 70 mm up.
4.5 mm holes for the thumb screws: 12 from the rear edge 125 up, and 124 from the rear edge 15 up.
Knob: print a 28 mm head, 10 thick, on a 12 mm stem 10.5 long; press an M6 x 25 screw through its centre as a stud (head moulded in).
Fit: the door covers the opening on the housing's door side with two M4 thumb screws; the knob stem passes the door and screws into the shaft end, clamping the plate against the shaft collar.
Liners: two discs 122 mm across, 2 mm thick, with a 22 mm hole and a notch 16 mm tall at the brush. Chain side: two 3 mm pegs 4 long, 48 mm each side of centre. Door side: two 5 mm pegs, 6 long, that rest on the door.
For an 8 mm plate the chain-side liner is 1 mm; a 10 mm plate has none.
Check: door off and knob out in under a minute, no tools.

SEEDLINE		github.com/BoujeeEnjinia1701/seedline	
SeedLine housing door, plate liners and plate knob: making sketch			
DRAWING NO. SDL - DWG - 113		REV P2	SHEET 1 of 1
		SIZE ANSI B	
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02
		DRAWN Amish Chadha	
MATERIAL / NOTES UV-stabilized clear polycarbonate sheet 3 mm; liners and knob PETG printed			
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com		Generated from cad/src; do not edit by hand	