
REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-24	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

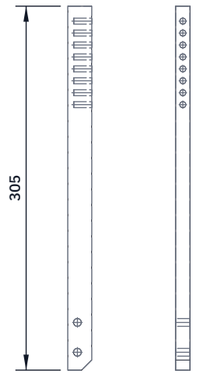


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

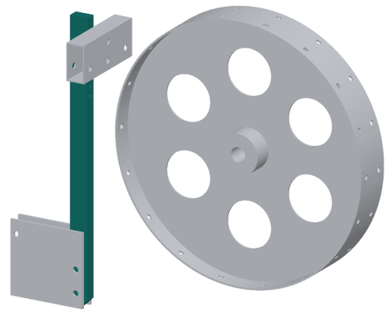

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 305 mm of 20 x 12 flat bar. The 12 mm faces are front and back.
Grind a 45 degree chamfer, 8 mm, on the front bottom corner: the nose.
Front face: eight holes, drill 5.0 and tap M6, 15 mm deep, centred, at 222.5 to 292.5 mm from the bottom, every 10 mm (depth settings).
Two 6.5 mm holes across, 8 mm from the rear face, 15 and 40 mm from the bottom, for the boot plates.
Fit: front face flat on the rear of the opener cross member, two M6 bolts from the front into two tapped holes 20 mm apart. Using the lowest pair gives 60 mm depth; each pair up is 10 mm shallower.
Check: the shank hangs square to the frame; the nose points forward.

SEEDLINE github.com/BoujeeEnjinia1701/seedline

SeedLine opener shank: making sketch

DRAWING NO.	REV	SHEET	SIZE
SDL-DWG-117	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES
Steel flat bar 20 x 12 mm, S235 class

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand