

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	Kit 1.9.1: redrawn from the detailed model (SKG-DEC-001 K1 to K21)	2026-10-24	AC
P3	SKG-DEC-001 O4: load indicator in place of the shear link	2026-10-25	AC




TOP VIEW

Scale 1:10; looking down (along -Z)




FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

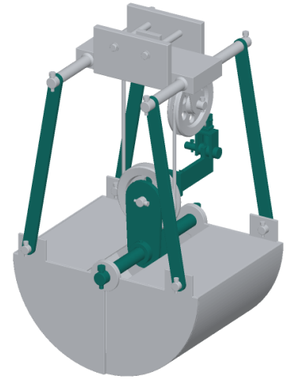

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Crosshead plates 10 mm, 50 apart: hinge hole 30.5, axle hole 20.5 120 above
Hinge pin 30 x 406; two set collars hold the crosshead central
Tie rods 30 x 10 x 470, closed eyes, 420 between 20.5 and 25.5 holes
Dead end on one plate: stub, arm 45 deep and lug, hole 197 up, 130 aside
Arm kept above 140 so the open shells clear it
Load indicator: two 6 mm straps 30 x 72 on a 16 x 42 pin, housing plate on top
M8 rod, 14 disc springs 18 x 9.2 x 1.0 under the housing; fork pin 74 above
Check: crosshead turns on the pin; rods swing freely

SINKGRAB

github.com/BoujeeEnjinia1701/sinkgrab

Crosshead, tie rods and load indicator: making sketch

DRAWING NO.	REV	SHEET	SIZE
SKG-DWG-111	P3	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-25	Amish Chadha

MATERIAL / NOTES

10 mm plate; 30 x 10 flat; 6 and 5 mm plate; 30 mm bar; 16 mm pin; M8 rod

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand