



CONCEPT, NOT FOR FABRICATION

SinkGrab · github.com/BoujeeEnjinia1701/sinkgrab

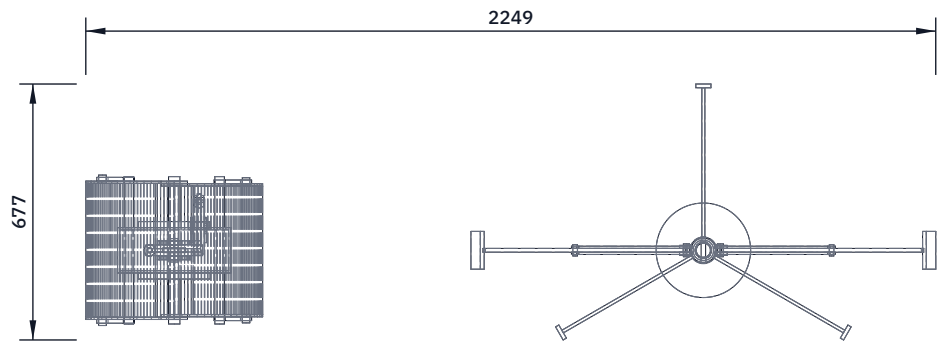


TOP VIEW

Scale 1:20; looking down (along -Z)

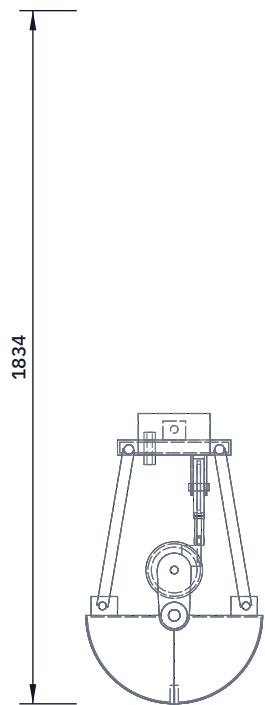


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

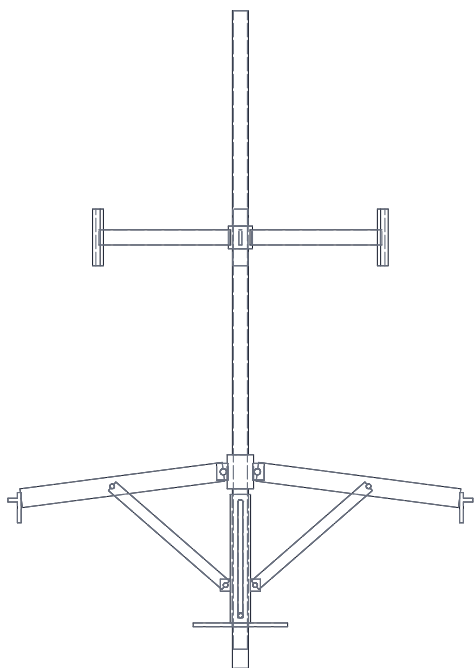

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

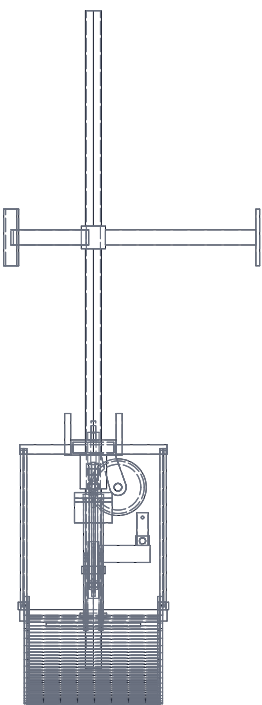

ISOMETRIC VIEW

Not to scale; grab left (closed), scraper head right (arms open); seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

- Grab shells R 230 x 340 wide; closed span 468; 28.3 L
- Hinge pin 30; tie rods 30 x 10 at 420 centres; head pins at x +/- 120
- Head to crosshead stroke 142; open 50 deg, lips 352 apart
- Line: guide tube, crosshead sheave, upper sheave, shear link on crosshead (3:1)
- Shear link pin about 1.9 mm, releases 1.20 to 1.47 kN (break-tested)
- Toe blades at 615 radius, 40 beyond a 1.0 m ring's outer face
- Arms fold to 389 radius: sleeve slides 300 on a 12 cross pin
- Sleeve 54 x 340, slot 13 x 312 each side; no stop collar
- Centralizer skids at 440 radius, 700 above the toes
- Foot plate 250 dia; sump 330 below the toe line
- Pole 42.4 x 2.6 in 2 m sections, 36 spigot and M12 cross bolt
- Third-angle; front view from -Y

SINKGRAB

github.com/BoujeeEnjinia1701/sinkgrab

Clamshell grab and under-curb scraper: general arrangement

DRAWING NO.

SKG-DWG-002

REV

P4

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:20

UNITS

mm

PROJECTION



DATE

2026-10-04

DRAWN

Amish Chadha

MATERIAL / NOTES

Steel plate and section, wear-resistant lips and toes; bought sheave and pins per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION