



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	SKG-DDR-004: stop collar replaced by a cross hole for the sleeve pin	2026-10-04	AC

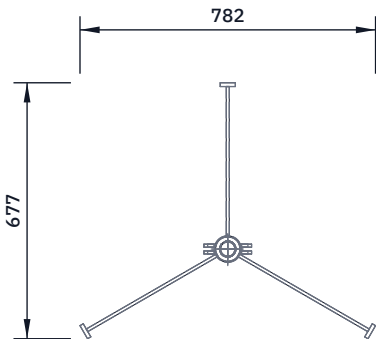


TOP VIEW

Scale 1:20; looking down (along -Z)

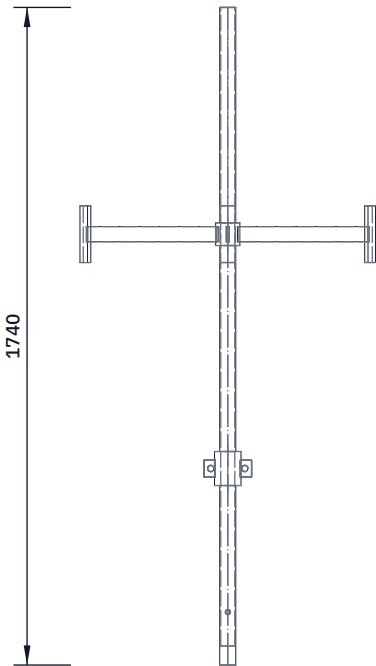


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

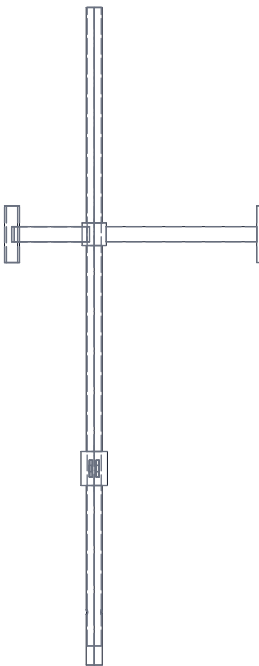

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

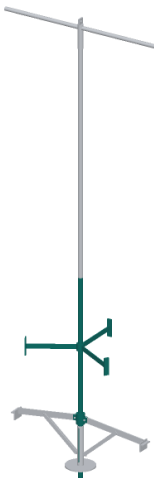

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bottom pole 42.4 x 2.6, 1,420 long, solid 50 mm spike end; no stop collar
12.5 cross hole 140 above the tip, square to the arm lugs, for the sleeve pin
Hub 70 OD x 90 at 80 above the toe line; two pairs of lugs, 16.5 holes at 45
Centralizer collar at 700 up; three arms 120 deg apart; skids at 440 radius
Skid arms drilled for 340, 440 and 590 radius (0.8, 1.0 and 1.3 m rings)
Top end takes the next section's spigot, 13 mm cross hole
Check: pole straight within 3 mm; skids on a 880 circle

SINKGRAB

github.com/BoujeeEnjinia1701/sinkgrab

Scraper head (pole, hub and centralizer): making sketch

DRAWING NO. SKG-DWG-112			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-04		DRAWN Amish Chadha
MATERIAL / NOTES 42.4 x 2.6 tube; 70 mm tube hub; 8 mm plate lugs; 40 x 8 flat; 10 mm skids					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	