




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	SKG-DDR-004: 340 mm slotted sleeve and 12 mm cross pin	2026-10-04	AC

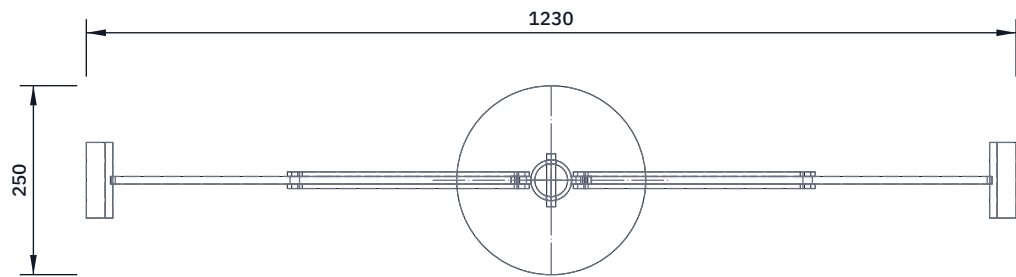


TOP VIEW
Scale 1:10; looking down (along -Z)

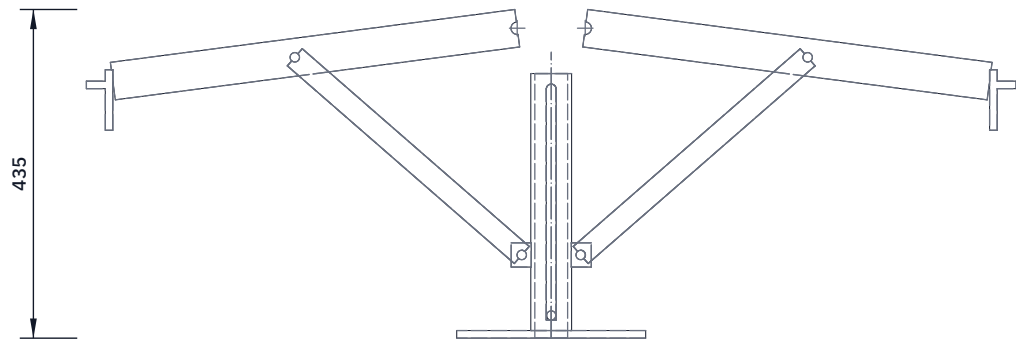

FRONT VIEW
Scale 1:10; looking at the front (along +Y)



RIGHT VIEW
Scale 1:10; looking at the right side (along -X)

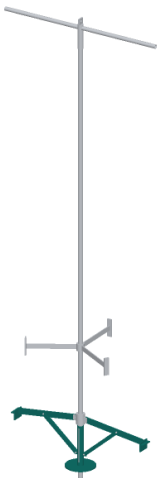

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Arms 50 x 10, 540 from pivot to toe; toe plate 100 x 80 x 10
- Toe blade 100 x 35 x 10 at the cutting level, 25 beyond the toe plate
- Blades reach 615 radius open: 40 beyond a 1.0 m ring's outer face
- Struts 30 x 6 in pairs, 398 between 12.5 holes
- Sleeve 54 x 340; slot 13 x 312 each side, 14 up; foot plate 250 dia
- Strut lugs 100 up; cross pin 12 x 70 through slots and pole, R-clip
- Sleeve slides 300 on the pin: blades fold to 389 radius
- Longer arm pair (660) for 1.2 to 1.3 m rings
- Check: arms open and fold freely by hand

SINKGRAB			github.com/BoujeeEnjinia1701/sinkgrab		
Scraper arms, struts and sleeve: making sketch					
DRAWING NO. SKG-DWG-113		REV P2	SHEET 1 of 1	SIZE ANSI B	
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-04	DRAWN Amish Chadha	
MATERIAL / NOTES 50 x 10 flat; 10 mm wear plate; 30 x 6 flat; 54 mm tube; 10 mm plate; 12 mm bar					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		