


CONCEPT, NOT FOR FABRICATION


SleeveDrift · github.com/BoujeeEnjinia1701/sleevedrift

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-10-03	AC
P2	SVD-DDR-002: design for construction	2026-10-03	AC

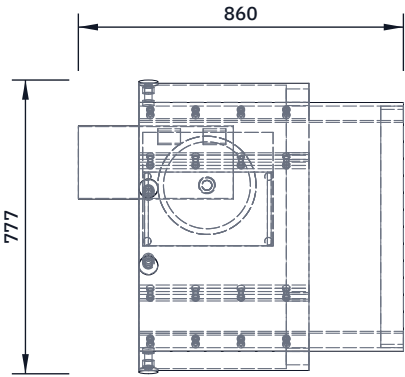


TOP VIEW

Scale 1:20; looking down (along -Z)

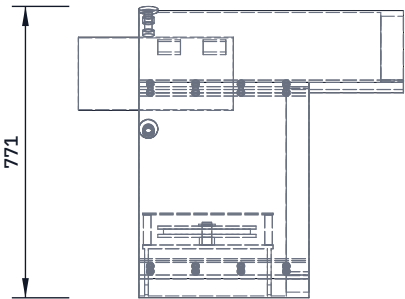


FRONT VIEW

Scale 1:20; looking at the front (along +Y)



RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

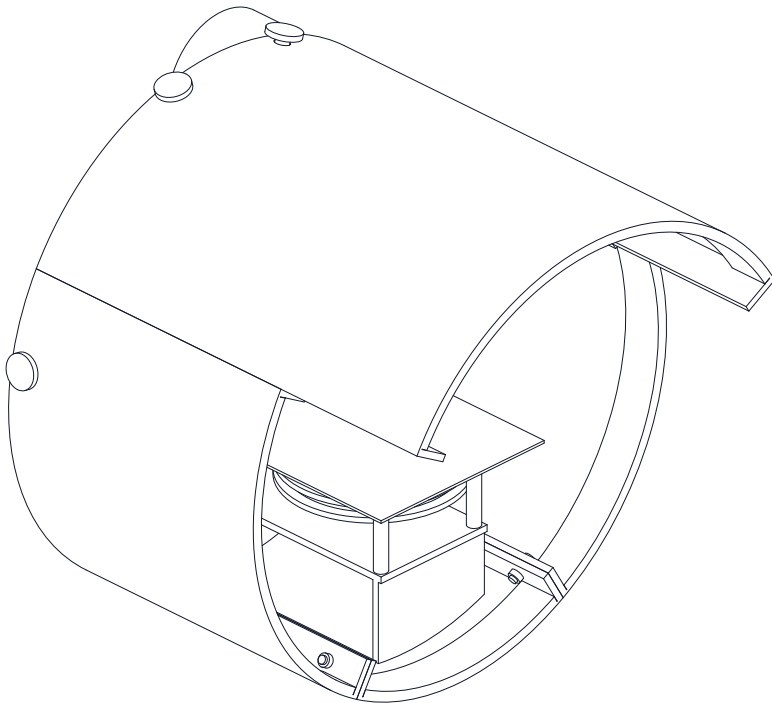

ISOMETRIC VIEW

Not to scale; seen from the front right and above

MAIN DIMENSIONS AND INTERFACES (MM)

Ring 760 OD x 5 shell, 450 long: 200 inside the pipe, 250 beyond the mouth

Hood: crown runs on 250 beyond the ring front; tip 500 from the mouth

Segments: crown 120 deg (3), sides 90 deg (2), bottom 60 deg (1)

Joints at 60, 150, 210, 300 deg from the top; flanges 50 x 10 inside

Four M12 8.8 bolts per joint (4), 120 pitch, 25 in from the shell

Ring rests on the pipe invert; 20 gap at the crown

Jacking screws M20 (5) at 15 deg either side of the top and 80 deg; 175 inside the mouth

Face sheave 240 pitch (6) on a 25 pin, rope plane 185 above the platform

Rope legs 240 apart: train lane y = -10, return leg y = +230

Cover and kneeling plate 4 mm (8) on four posts, top 234 up

Duct spigot 194 x 2 (9) on two saddles at 40 deg, 265 off the pipe axis

Heaviest piece: crown 31.0 kg; ring set 102 kg

Third-angle; front view from -Y; X toward the face; (n) = BOM line

SLEEVEDRIFT

github.com/BoujeeEnjinia1701/sleevedrift

Hooded cutting ring and face sheave: general arrangement

DRAWING NO. SVD-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 5 mm S355 rolled plate segments, bought sheave and fasteners per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand