



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW

Scale 1:2; looking down (along -Z)




FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

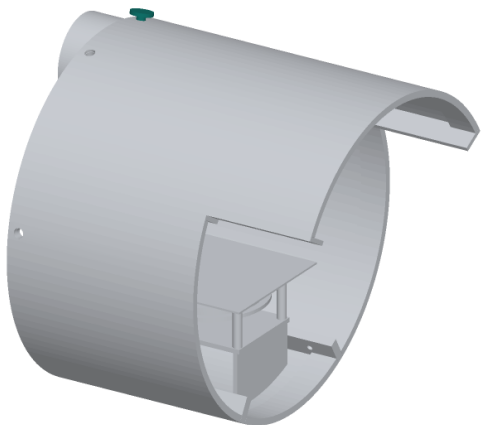

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Four alike; screw bought, pad turned
- Pad 50 diameter x 7, ball seat 10 deep for the screw tip
- Round the screw tip to a 12 radius so the pad can tilt 5 deg
- Locknut on the screw inside the nut
- Pad sits against the pipe wall; the screw pushes it out
- Check: pad swivels freely on the tip

SLEEVEDRIFT

github.com/BoujeeEnjinia1701/sleevedrift

Jacking screw with swivel pad: making sketch

DRAWING NO. SVD-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES M20 x 90 class 8.8 set screw, mild steel bar for the pad					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	