
CONCEPT, NOT FOR FABRICATION

SleeveDrift · github.com/BoujeeEnjinia1701/sleevedrift

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-11-02	AC
P2	SVD-DDR-002: design for construction	2026-11-02	AC
P4	Kit 1.9.1: redrawn from the detailed model (bolts, welds, pins)	2026-11-02	AC

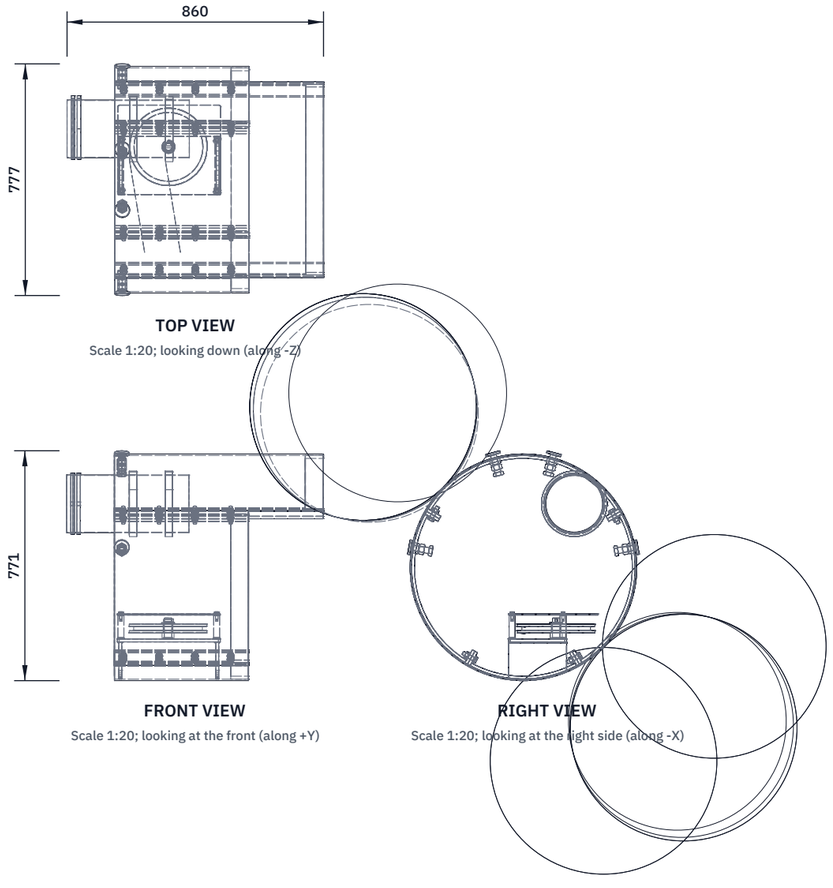

TOP VIEW


Scale 1:20; looking down (along -Z)

FRONT VIEW

Scale 1:20; looking at the front (along +Y)

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

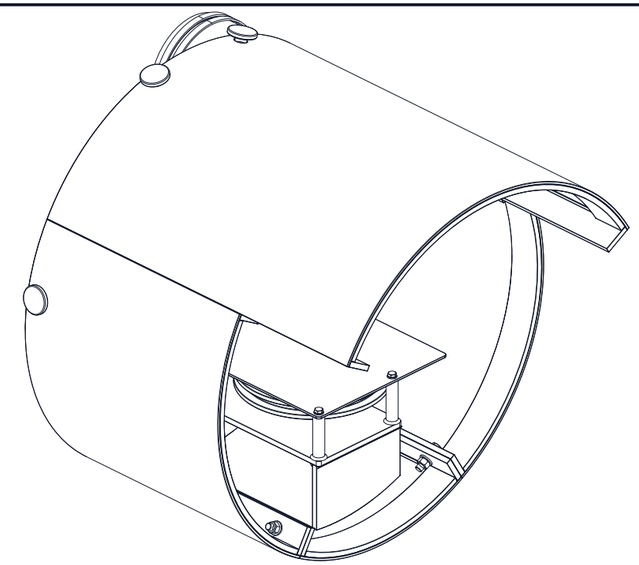

ISOMETRIC VIEW

Not to scale; seen from the front right and above

MAIN DIMENSIONS AND INTERFACES (MM)

Ring 760 OD x 5 shell, 450 long: 200 inside the pipe, 250 beyond the mouth
Hood: crown runs on 250 beyond the ring front; tip 500 from the mouth
Segments: crown 120 deg (3), sides 90 deg (2), bottom 60 deg (1)
Joints at 60, 150, 210, 300 deg from the top; flanges 50 x 10 inside
Four M12 8.8 bolts per joint (4), 120 pitch, 25 in from the shell
Ring rests on the pipe invert; 20 gap at the crown
Jacking screws M20 (5) at 15 deg either side of the top and 80 deg; 175 inside the mouth
Face sheave 240 pitch (6) on a 25 pin, rope plane 185 above the platform
Rope legs 240 apart: train lane y = -10, return leg y = +230
Cover and kneeling plate 4 mm (8) on four posts, top 234 up
Duct spigot 194 x 2 (9) on two saddles at 40 deg, 265 off the pipe axis
Heaviest piece: crown 33.8 kg; ring set 107 kg
Third-angle; front view from -Y; X toward the face; (n) = BOM line

SLEEVEDRIFT

github.com/BoujeeEnjinia1701/sleevedrift

Hooded cutting ring and face sheave: general arrangement

DRAWING NO.	REV	SHEET	SIZE
SVD-DWG-001	P4	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:20	mm		2026-11-02	Amish Chadha

MATERIAL / NOTES

5 mm S355 rolled plate segments, bought sheave and fasteners per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand