



CONCEPT, NOT FOR FABRICATION

SleeveDrift · github.com/BoujeeEnjinia1701/sleevedrift

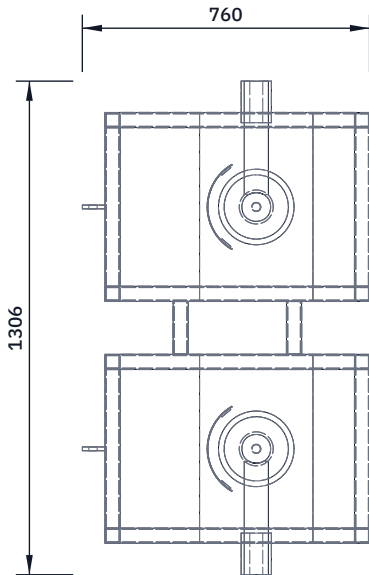


TOP VIEW

Scale 1:20; looking down (along -Z)

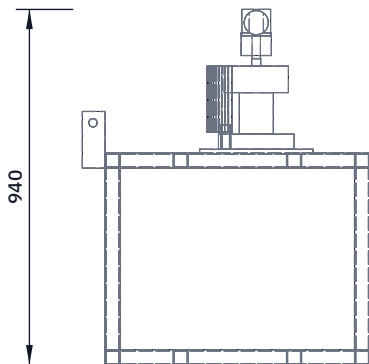


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

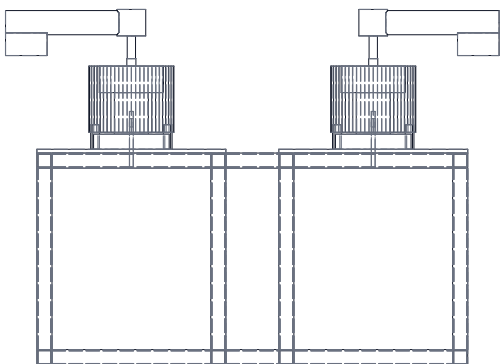

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

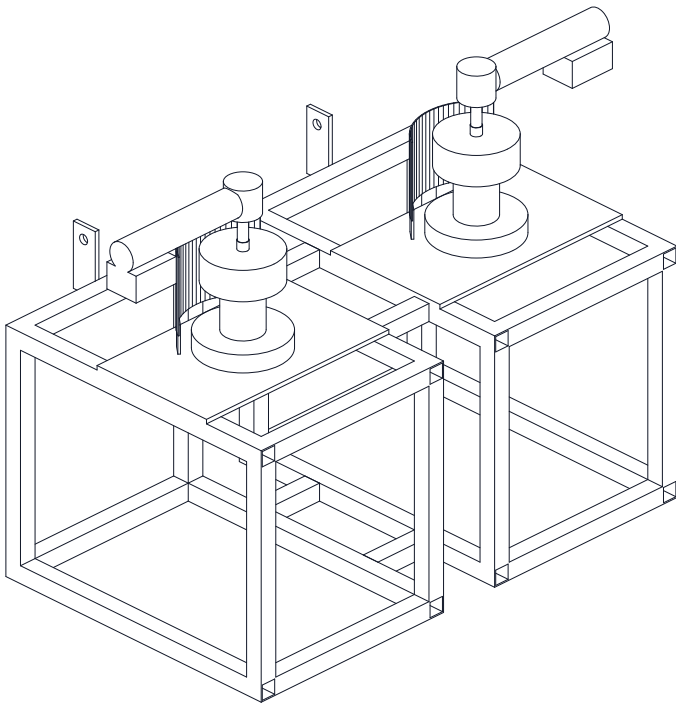

ISOMETRIC VIEW

Not to scale; seen from the front right and above

MAIN DIMENSIONS AND INTERFACES (MM)

- Two welded trestles (15), each 700 x 500, 560 high, 40 x 40 x 3 SHS
- Right-angle drill (30) on a winch bit (31) in each socket; body outboard
- Drill in high gear only, 120 rpm; clutch about 35 N m; no trigger lock
- Drum guard (33) round the rear 120 deg, 260 dia, two legs to the top plate
- Winch handles stowed; hand cranking is the fallback
- Trestle 34.8 kg; carried and set one at a time
- Top plate 300 x 500 x 10, drilled to the winch base pattern
- Winch A (pull rope) at y = -200; winch B (tail rope) at y = +440
- Winch centres 300 back from the trestle front (+X face)
- Rope reaches the drums about 650 up, 6 to 7 deg rising
- Station front 5,500 from the pipe mouth at the design case
- Anchor eye 22 hole 640 up; round sling (19) level to a structural anchor
- Rope bins (18) outboard; nobody in the rope lines while hauling
- Third-angle; front view from -Y; pipe mouth toward +X; (n) = BOM line

SLEEVEDRIFT

github.com/BoujeeEnjinia1701/sleevedrift

Portal haul station: general arrangement

DRAWING NO. SVD-DWG-002			REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 40 x 40 x 3 SHS trestles, 10 mm plate; bought winches and drills per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	