



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

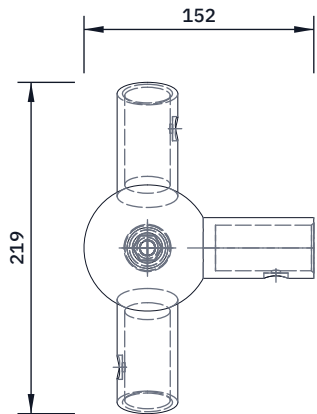


TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

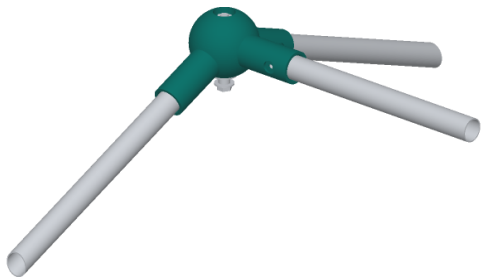

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print 2, the same for the rear and the front (the front one is turned round). Three 30.1 mm sockets from the 84 mm core: two rafters, each 21.8 degrees below level, out to the sides; one ridge tube along the ridge line, toward the middle frame. Bores 65 mm deep to a flat stop, 1.5 mm mouth chamfer, 6 mm button hole 85 mm out in a 16 mm finger recess. Cable bolt hole 10.5 mm straight down through the centre: spot face on the underside, nut recess on top so nothing stands proud under the roof tarpaulin. Same bolt set as the eave node. The guy line ties to its ring. Check: the ring swings freely on the spacer.

SNAPFRAME

github.com/BoujeeEnjinia1701/snapframe

SnapFrame ridge node, end (make 2): making sketch

DRAWING NO. SNF-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Printed in filled PA12-class nylon, about 277 g; M10 cable bolt set					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand