




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:5; looking down (along -Z)



FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

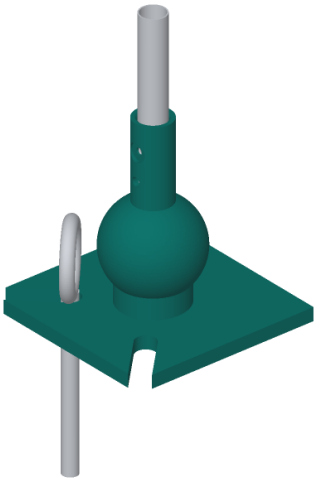

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print 6, plate down on the bed; supports under the core only.
Plate 170 x 170 x 12 mm; core 84 mm ball, its centre 60 mm up.
One socket straight up: bore 24.0 mm, 65 mm deep to a flat stop;
1.5 mm chamfer at the mouth so the button rides in.
Button hole 6 mm, 85 mm above the core centre, on the outboard
side, in a 16 mm finger recess with 1.5 mm of wall left.
Hitch pin hole 8 mm right through, 60 mm above the core centre,
in line with the button hole.
Two anchor slots 18 mm wide at 45 degrees either side of the
outboard side, round-ended 62 mm from the centre, open at
the corners. The anchor uses the slot that points away from
the shelter's middle (rear feet backward, front feet forward).
Check: a post end slides in to the stop with the button pressed.

SNAPFRAME			github.com/BoujeeEnjinia1701/snapframe		
SnapFrame foot node (make 6): making sketch					
DRAWING NO. SNF-DWG-101		REV P1	SHEET 1 of 1		SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Printed polymer (to be chosen, ASA class assumed), about 410 g					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		