



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:20; looking down (along -Z)

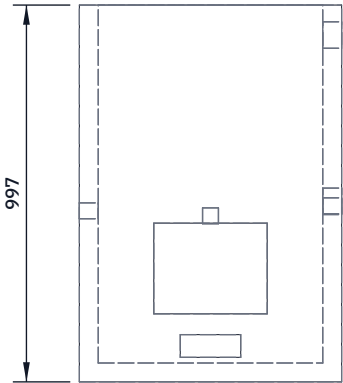


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

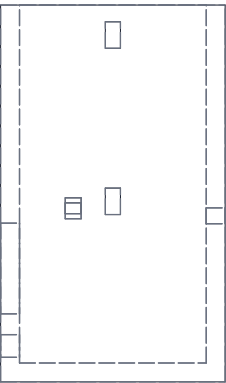

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

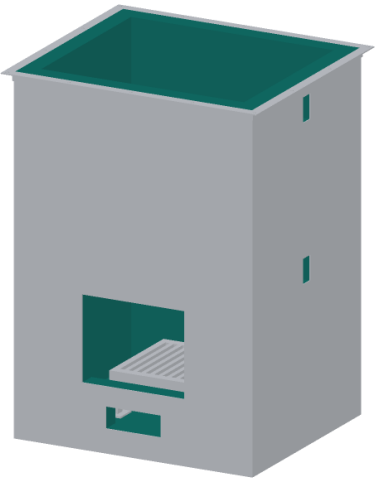

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Floor: 50 mm board 694 x 594 (the inside of the shell), laid first.

Walls: two layers of 25 mm blanket, rigidised, 947 tall, standing on the floor board. Cut the back and front 694 long and the two ends 494 long, so the ends fit between them.

Roof board: 50 mm board 594 x 494 with a 150 hole in the centre, pinned under the roof plate (it comes off with the roof).

Cut through the front: door opening 300 x 240 and air inlet 160 x 60, lined up with the shell openings.

Cut through the right end: the two tube slots, 40 wide.

Slot each wall where the coil brackets pass: bracket size plus 1.

Hold the blanket with stainless pins welded to the shell, about 250 apart, and speed washers. Wear a mask: see the safety stops.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot fibre lining: cutting sketch

DRAWING NO.

STR-DWG-104

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:20

UNITS

mm

PROJECTION



DATE

2026-10-01

DRAWN

Amish Chadha

MATERIAL / NOTES

Ceramic fibre: 25 mm blanket (2 layers) and 50 mm board