




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

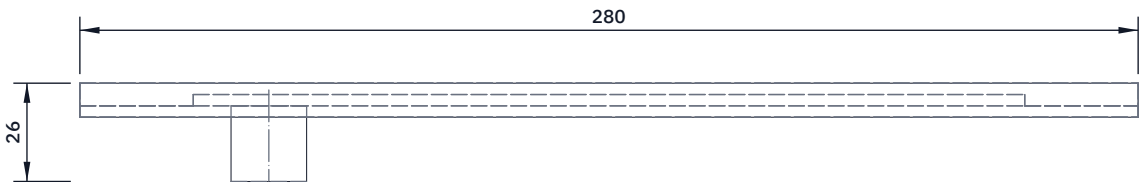


TOP VIEW
Scale 1:2; looking down (along -Z)

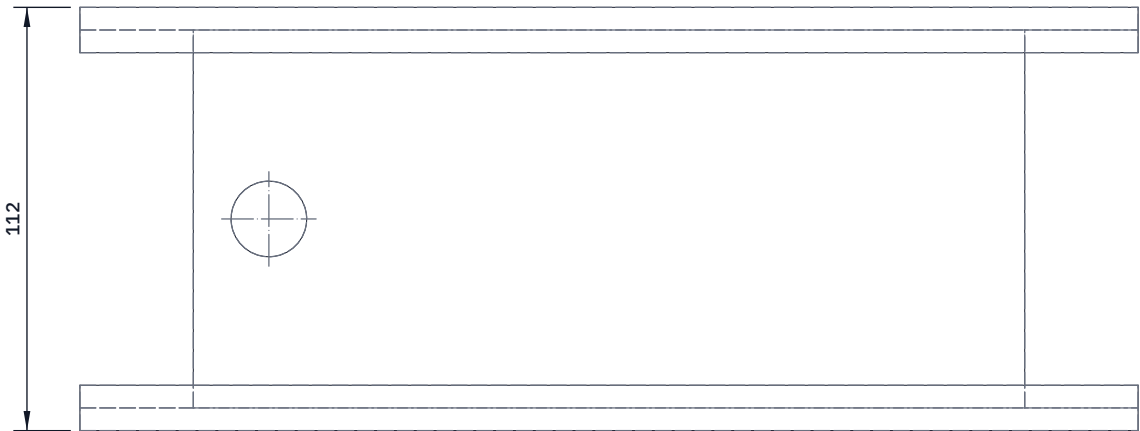

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

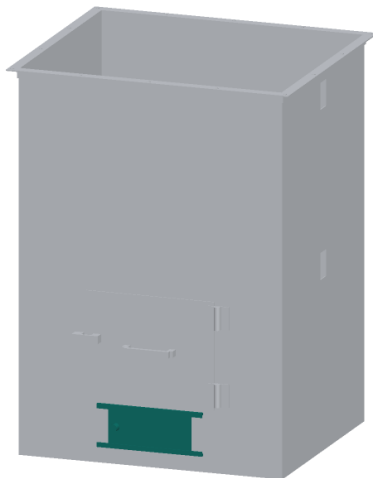

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Slide: 3 mm plate 220 wide x 100 tall with a 20 mm knob.

Guides: two strips 280 long built from 6 x 6 bar and a 3 mm lip, welded to the front of the shell above and below the air inlet, so the slide moves sideways between them.

Top guide: underside 148 above the bottom of the shell;

bottom guide: top 48 above. Air inlet 160 x 60 between them.

The slide is a loose fit (about 1 mm): it must move by hand when hot.

Slide fully across to shut the air; open it to burn faster.

Check: the slide covers the inlet when shut and moves freely; the top guide clears the door plate by at least 3 mm.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot air damper slide and guides: making sketch

DRAWING NO. STR-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Mild steel sheet 3 mm; flat bar 6 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	