

## WPC FUSE LIST

### A-12697-1 Power Driver Board

Fuse #	Value	Circuit
F101	2.5A, 250V, SB	Left Flipper
F102	2.5A, 250V, SB	Right Flipper
F103	3A, 250V, SB	Solenoids 25-28
F104	3A, 250V, SB	Solenoids 9-16
F105	3A, 250V, SB	Solenoids 1-8
F106	5A, 250V, SB	G.I. 2 Wht-Vio
F106	5A, 250V, SB	G.I. 3 Wht-Yel
F106	5A, 250V, SB	G.I. 5 Wht-Grn
F109	5A, 250V, SB	G.I. 4 Wht-Orn
F110	5A, 250V, SB	G.I. 1 Wht-Brn
F111	5A, 250V, SB	Flasher Secondary
F112	5A, 250V, SB	Solenoid Secondary
F113	5A, 250V, SB	+5V Logic
F114	8A, 32V, NB	+18V Lamp Matrix
F115	3/4A, 250V, FB	+12V Switch Matrix
F116	3A, 250V, SB	+12V Secondary

### A-12739-1 Display Driver Board

Fuse #	Value	Circuit
F301	3/8A, 250V, SB	Displays

#### CAUTION

For continued protection against risk of fire, replace only with the same type of fuse having the same electrical ratings.

16-9182-1

## WPC FUSE LIST

### A-12697-1 Power Driver Board

Fuse #	Value	Circuit
F101	2.5A, 250V, SB	Left Flipper
F102	2.5A, 250V, SB	Right Flipper
F103	3A, 250V, SB	Solenoids 25-28
F104	3A, 250V, SB	Solenoids 9-16
F105	3A, 250V, SB	Solenoids 1-8
F106	5A, 250V, SB	G.I. 2 Wht-Vio
F106	5A, 250V, SB	G.I. 3 Wht-Yel
F106	5A, 250V, SB	G.I. 5 Wht-Grn
F109	5A, 250V, SB	G.I. 4 Wht-Orn
F110	5A, 250V, SB	G.I. 1 Wht-Brn
F111	5A, 250V, SB	Flasher Secondary
F112	5A, 250V, SB	Solenoid Secondary
F113	5A, 250V, SB	+5V Logic
F114	8A, 32V, NB	+18V Lamp Matrix
F115	3/4A, 250V, FB	+12V Switch Matrix
F116	3A, 250V, SB	+12V Secondary

### A-12738 Audio Board Ass'y

Fuse #	Value	Circuit
F501	3A, 250V, SB	18 Vac CT Gry Gry/Wht CT
F502	3A, 250V, SB	18 Vac CT Gry/Grn

### A-14039 Dot Matrix Controller Ass'y

Fuse #	Value	Circuit
F601	3/8A, 250V, SB	100 Vac Vio
F602	3/8A, 250V, SB	100 Vac Vio

#### CAUTION

For continued protection against risk of fire, replace only with the same type of fuse having the same electrical ratings.

16-9182-2

### CAUTION

For continued protection against risk of fire, replace only with the same type of fuse having the same electrical ratings.

### WPC FUSE LIST

#### **A-12697-1 Power Driver Board**

<b>Fuse #</b>	<b>Value</b>	<b>Circuit</b>
<u>F101</u>	<u>2.5A, 250V, SB</u>	<u>Left Flipper</u>
<u>F102</u>	<u>2.5A, 250V, SB</u>	<u>Right Flipper</u>
<u>F103</u>	<u>3A, 250V, SB</u>	<u>Solenoids 25-28</u>
<u>F104</u>	<u>3A, 250V, SB</u>	<u>Solenoids 9-16</u>
<u>F105</u>	<u>3A, 250V, SB</u>	<u>Solenoids 1-8</u>
<u>F106</u>	<u>5A, 250V, SB</u>	<u>G.I. 2 Wht-Vio</u>
<u>F106</u>	<u>5A, 250V, SB</u>	<u>G.I. 3 Wht-Yel</u>
<u>F106</u>	<u>5A, 250V, SB</u>	<u>G.I. 5 Wht-Grn</u>
<u>F109</u>	<u>5A, 250V, SB</u>	<u>G.I. 4 Wht-Orn</u>
<u>F110</u>	<u>5A, 250V, SB</u>	<u>G.I. 1 Wht-Brn</u>
<u>F111</u>	<u>5A, 250V, SB</u>	<u>Flasher Secondary</u>
<u>F112</u>	<u>5A, 250V, SB</u>	<u>Solenoid Secondary</u>
<u>F113</u>	<u>5A, 250V, SB</u>	<u>+5V Logic</u>
<u>F114</u>	<u>8A, 32V, NB</u>	<u>+18V Lamp Matrix</u>
<u>F115</u>	<u>3/4A, 250V, FB</u>	<u>+12V Switch Matrix</u>
<u>F116</u>	<u>3A, 250V, SB</u>	<u>+12V Secondary</u>

#### **A-12738 Audio Board Ass'y**


<b>Fuse #</b>	<b>Value</b>	<b>Circuit</b>
<u>F501</u>	<u>3A, 250V, SB</u>	<u>18Vac CT Gry</u> <u>Gry/Wht CT</u>
<u>F502</u>	<u>3A, 250V, SB</u>	<u>18Vac CT Gry/Grn</u>

#### **A-14039 Dot Matrix Controller Ass'y**

<b>Fuse #</b>	<b>Value</b>	<b>Circuit</b>
<u>F601</u>	<u>3/8A, 250V, SB</u>	<u>100 Vac Vio</u>
<u>F602</u>	<u>3/8A, 250V, SB</u>	<u>100 Vac Vio</u>

WPC FUSE LIST


<b>CAUTION</b> For continued protection against risk of fire, replace only with the same type of fuse having the same electrical ratings.			<b>A-12697-1 Power Driver Board</b>			<b>A-14039 Dot Matrix Controller Ass'y</b>		
	<b>Fuse #</b>	<b>Value</b>	<b>Circuit</b>		<b>Fuse #</b>	<b>Value</b>	<b>Circuit</b>	
	F101	3A, 250V, SB	Lwr Left Flpr		F109	5A, 250V, SB	G.I. 4 Wht-Orn	
	F102	3A, 250V, SB	Lwr Right Flpr		F110	5A, 250V, SB	G.I. 1 Wht-Brn	
	F103	3A, 250V, SB	Solenoids 25-28		F111	5A, 250V, SB	Flasher Secondary	
	F104	3A, 250V, SB	Solenoids 9-16		F112	5A, 250V, SB	Solenoid Secondary	
	F105	3A, 250V, SB	Solenoids 1-8		F113	5A, 250V, SB	+5V Logic	
	F106	5A, 250V, SB	G.I. 2 Wht-Vio		F114	8A, 32V, NB	+18V Lamp Martix	
	F107	5A, 250V, SB	G.I. 3 Wht-Yel		F115	3/4A, 250V, FB	+12V Switch Martix	
	F108	5A, 250V, SB	G.I. 5 Wht-Grn		F116	3A, 250V, SB	+12V Secondary	
	<b>A-12738- AUDIO BOARD ASS'Y</b>				<b>A-15416 Extra Flpr Power Supply</b> (Only with 3 or more flippers)			
	<b>Fuse #</b>	<b>Value</b>	<b>Circuit</b>		<b>Fuse #</b>	<b>Value</b>	<b>Circuit</b>	
	F501	3A, 250V, SB	18 Vac CT Gry Gry/Wht CT		F901	3A, 250V, SB	Upper Left Flpr	
	F502	3A, 250V, SB	18 Vac CT Gry/Grn		F902	3A, 250V, SB	Upper Right Flpr	

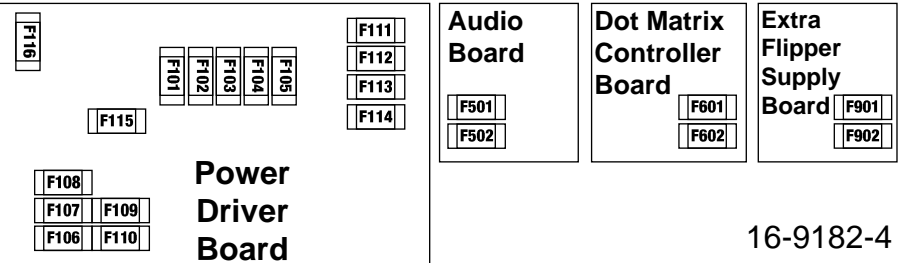

16-9182-4

WPC FUSE LIST


<b>CAUTION</b> For continued protection against risk of fire, replace only with the same type of fuse having the same electrical ratings.			<b>A-12697-1 Power Driver Board</b>			<b>A-14039 Dot Matrix Controller Ass'y</b>		
	<b>Fuse #</b>	<b>Value</b>	<b>Circuit</b>		<b>Fuse #</b>	<b>Value</b>	<b>Circuit</b>	
	F101	3A, 250V, SB	Lwr Left Flpr		F109	5A, 250V, SB	G.I. 4 Wht-Orn	
	F102	3A, 250V, SB	Lwr Right Flpr		F110	5A, 250V, SB	G.I. 1 Wht-Brn	
	F103	3A, 250V, SB	Solenoids 25-28		F111	5A, 250V, SB	Flasher Secondary	
	F104	3A, 250V, SB	Solenoids 9-16		F112	7A, 250V, SB	Solenoid Secondary	
	F105	3A, 250V, SB	Solenoids 1-8		F113	5A, 250V, SB	+5V Logic	
	F106	5A, 250V, SB	G.I. 2 Wht-Vio		F114	8A, 32V, NB	+18V Lamp Martix	
	F107	5A, 250V, SB	G.I. 3 Wht-Yel		F115	3/4A, 250V, FB	+12V Switch Martix	
	F108	5A, 250V, SB	G.I. 5 Wht-Grn		F116	3A, 250V, SB	+12V Secondary	
	<b>A-12738- AUDIO BOARD ASS'Y</b>				<b>A-15416 Extra Flpr Power Supply</b> (Only with 3 or more flippers)			
	<b>Fuse #</b>	<b>Value</b>	<b>Circuit</b>		<b>Fuse #</b>	<b>Value</b>	<b>Circuit</b>	
	F501	3A, 250V, SB	18 Vac CT Gry Gry/Wht CT		F901	3A, 250V, SB	Upper Left Flpr	
	F502	3A, 250V, SB	18 Vac CT Gry/Grn		F902	3A, 250V, SB	Upper Right Flpr	

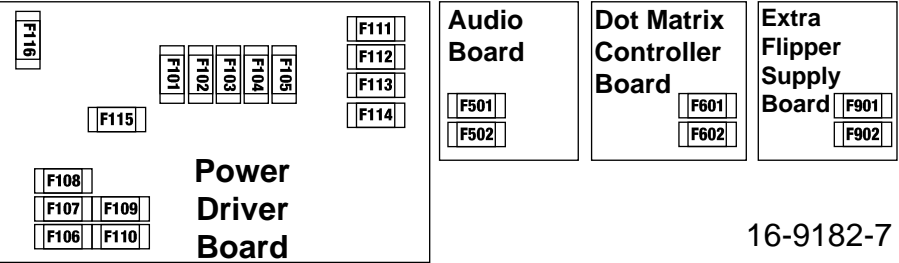

16-9182-7

WPC FUSE LIST

<b>CAUTION</b> For continued protection against risk of fire, replace only with the same type of fuse having the same electrical ratings.			<b>Power Driver Board</b>			<b>Dot Matrix Controller Ass'y</b>		
	<b>Fuse #</b>	<b>Value</b>	<b>Circuit</b>		<b>Fuse #</b>	<b>Value</b>	<b>Circuit</b>	
	F101	3A, 250V, SB	Lwr Left Flpr		F109	5A, 250V, SB	G.I. 4 Wht-Orn	
	F102	3A, 250V, SB	Lwr Right Flpr		F110	5A, 250V, SB	G.I. 1 Wht-Brn	
	F103	3A, 250V, SB	Solenoids 25-28		F111	5A, 250V, SB	Flasher Secondary	
	F104	3A, 250V, SB	Solenoids 9-16		F112	7A, 250V, SB	Solenoid Secondary	
	F105	3A, 250V, SB	Solenoids 1-8		F113	5A, 250V, SB	+5V Logic	
	F106	5A, 250V, SB	G.I. 2 Wht-Vio		F114	8A, 32V, NB	+18V Lamp Martix	
	F107	5A, 250V, SB	G.I. 3 Wht-Yel		F115	3/4A, 250V, FB	+12V Switch Martix	
	F108	5A, 250V, SB	G.I. 5 Wht-Grn		F116	3A, 250V, SB	+12V Secondary	
	<b>AUDIO BOARD ASS'Y</b>				<b>FLIPTRONICS I I ASSY</b>			
	<b>Fuse #</b>	<b>Value</b>	<b>Circuit</b>		<b>Fuse #</b>	<b>Value</b>	<b>Circuit</b>	
	F501	3A, 250V, SB	18 Vac CT Gry/Wht Gry/Wht CT		F901	3A, 250V, SB	Upper Left Flpr	
	F502	3A, 250V, SB	18 Vac CT Gry/Grn		F902	3A, 250V, SB	Upper Right Flpr	
					F901	3A, 250V, SB	Lwr Left Flpr	
					F902	3A, 250V, SB	Lwr Right Flpr	

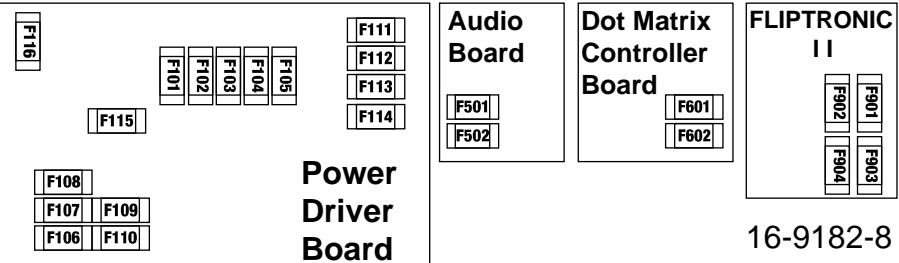

16-9182-8

Font used: Helvetica, HelveticaNeueLT Std Blk, HelveticaNeueLT Std Blk Cn.

Cards status:  
16-9182-1 WPC fuse list confirmed (size 102 x 140 mm). Used paper size A4 (297x210mm).  
16-9182-2 WPC fuse list confirmed (size 98 x 150 mm). Used paper size A4 (297x210mm).  
16-9182-3 WPC fuse list confirmed (size 87 x 140 mm). Used paper size A4 (297x210mm).  
16-9182-4 WPC fuse list confirmed (size 405 x 37 mm). Used paper size 11x17 inch (43 x 28cm).  
16-9182-5 needed  
16-9182-6 needed  
16-9182-7 WPC fuse list confirmed (size 405 x 37 mm). Used paper size 11x17 inch (43 x 28cm).  
16-9182-8 WPC fuse list confirmed (size 405 x 37 mm). Used paper size 11x17 inch (43 x 28cm).  
If you have any other information about these cards, please send a readable picture or scan to me.

Enjoy and have fun,  
Peter  
[www.inkochnito.nl](http://www.inkochnito.nl)  
If you like my work, please send me a donation via Paypal.