


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

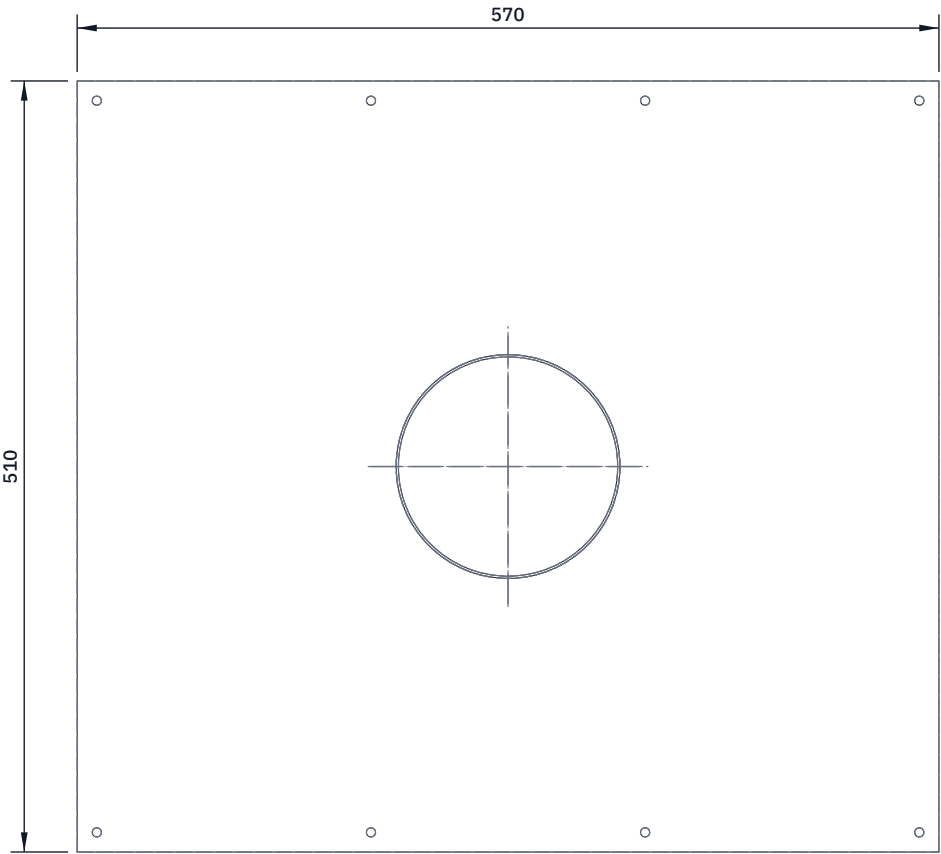


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

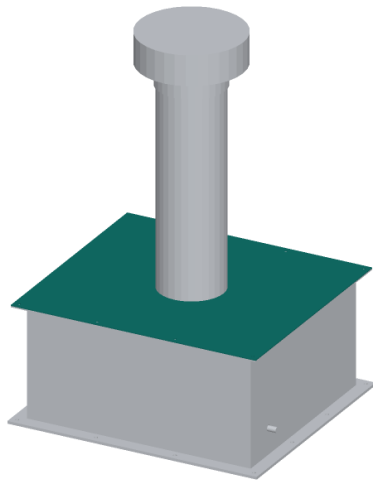

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Lid: 2 mm plate 570 x 510 with a 148 hole in the centre and eight 7 mm holes matching the box's top flange.

Spigot: 148 OD tube, 60 tall, welded into the hole. The chimney (150 bore) slides over it.

Fit: on a ceramic rope gasket on the top flange; eight M6 bolts.

The lid comes off to clean the tube bank: clean it every few days of firing; soot cuts the heat recovered.

Check: the chimney slides over the spigot by hand and stands upright.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot economizer lid and spigot: making sketch

DRAWING NO. STR-DWG-113			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Mild steel sheet 2 mm; tube 148 OD					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	