BUILD PLAN SKETCH, PLAN NOT YET BUILT

SteamRoot · github.com/BoujeeEnjinia1701/steamroot

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Named the primary (under-grate) air damper; secondary damper on sketch 124	2026-10-02	AC

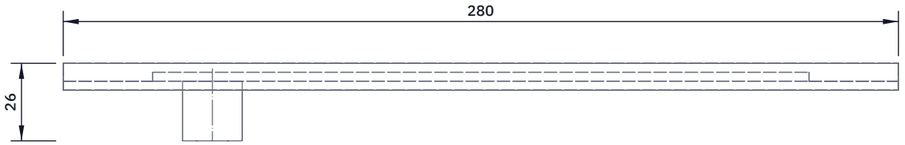

TOP VIEW

Scale 1:2; looking down (along -Z)

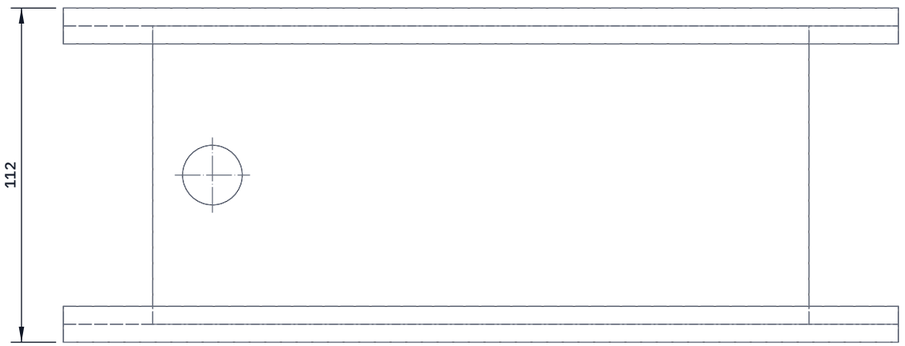

FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

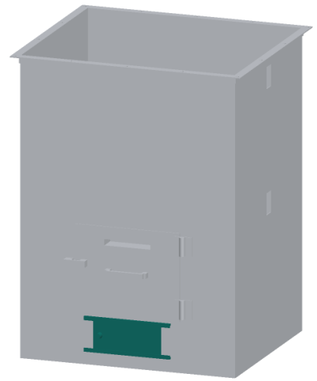

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Slide: 3 mm plate 220 wide x 100 tall with a 20 mm knob.
Guides: two strips 280 long built from 6 x 6 bar and a 3 mm lip,
welded to the front of the shell above and below the air inlet,
so the slide moves sideways between them.
Top guide: underside 148 above the bottom of the shell;
bottom guide: top 48 above. Air inlet 160 x 60 between them.
The slide is a loose fit (about 1 mm): it must move by hand when hot.
This is the primary air, under the grate. Set it with the secondary
slide on the door to hold the excess air near 1.5 (see the plan).
Check: the slide covers the inlet when shut and moves freely;
the top guide clears the door plate by at least 3 mm.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot primary air damper slide and guides: making sketch

DRAWING NO.	REV	SHEET	SIZE
STR-DWG-107	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Mild steel sheet 3 mm; flat bar 6 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand