BUILD PLAN SKETCH, PLAN NOT YET BUILT

SteamRoot · github.com/BoujeeEnjinia1701/steamroot

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Outlet and spigot moved 145 to the back (STR-DEC-001 S1)	2026-10-24	AC

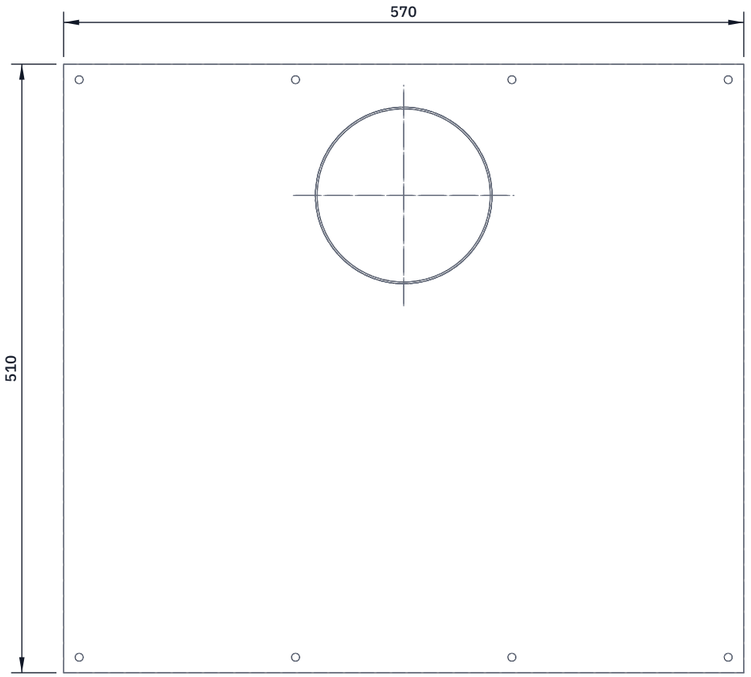

TOP VIEW

Scale 1:5; looking down (along -Z)

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

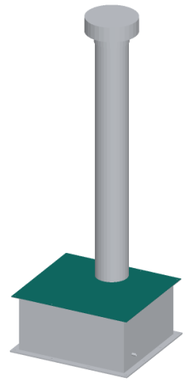

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Lid: 2 mm plate 570 x 510, 148 hole centred on the length and 145 behind the centre line; eight 7 mm holes for the flange.

Spigot: 148 OD stainless tube, 62 long, set through the hole flush underneath and welded round under the lid. Chimney slides over.

Fit: on a ceramic rope gasket on the top flange; eight M6 bolts.

The lid comes off to clean the tube bank: clean it every few days of firing; soot cuts the heat recovered.

Check: the chimney slides over the spigot by hand and stands upright.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot economizer lid and spigot: making sketch

DRAWING NO.	REV	SHEET	SIZE
STR-DWG-113	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

Mild steel sheet 2 mm; tube 148 OD

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand