REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

TOP VIEW

Scale 1:10; looking down (along -Z)

FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

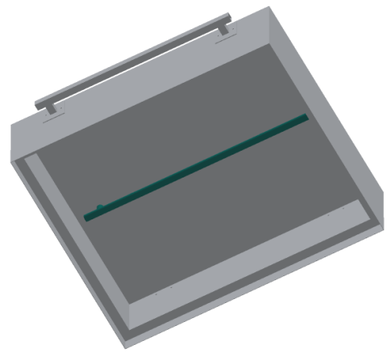

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two. Manifold: 30 OD stainless tube 1040 long, ends capped.
Drill 4 mm holes every 50 along the underside, in two rows 30
degrees each side of straight down (about 40 holes).
Riser: 30 OD tube 70 long welded upright into the manifold as a tee,
150 in from the hood end nearest the trailer.
Top flange: 3 mm plate, 70 round, welded to the riser; the steam
coupling screws into the riser above it.
Two hanger straps 20 x 2 hold the manifold 15 below the inner skin.
Fit: the riser goes up through the hood; the flange is bolted on top
with high-temperature sealant under it.
Check: blow through it: air comes out of every hole.

STEAMROOT github.com/BoujeeEnjinia1701/steamroot

SteamRoot hood manifold and inlet (make 2): making sketch

DRAWING NO.	REV	SHEET	SIZE
STR-DWG-121	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES
Stainless tube 30 OD; plate 3 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com