REV	DESCRIPTION	DATE	BY
P1	Making sketch for the evaporator bank and dampers	2026-10-02	AC
P2	Spacers split round the gas-pass baffle (sketch 127)	2026-10-24	AC

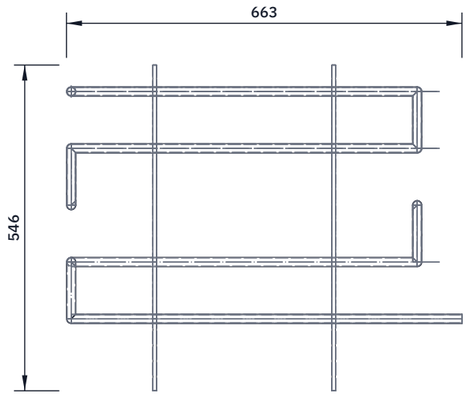

TOP VIEW

Scale 1:10; looking down (along -Z)

FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

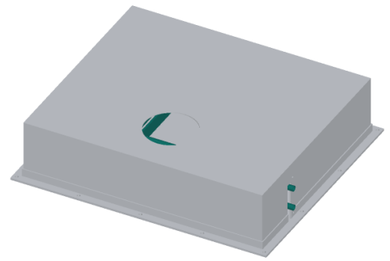

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

About 6.4 m of 15.88 x 1.24 stainless tube in one length, bent into two layers of five runs; bends 47.6 radius (a standard 5/8 in bender), runs 95 apart, bend tips 290 each side of the centre. Layers 45 and 105 above the roof plate, joined by a riser at the left end.

Water goes in at the top layer and out at the bottom layer, both at the right end, 152 in front of the centre: the hottest gas meets the last of the water (counterflow).

Supports: two 6 mm bars across the box, 300 apart, standing on the roof plate; spacers above and below the baffle (sketch 127).

Pressure test with water before fitting (see the safety stops).

Check: the bank sits on all four bars; tails level and square.

STEAMROOT github.com/BoujeeEnjinia1701/steamroot

SteamRoot evaporator bank tube and supports: making sketch

DRAWING NO.	REV	SHEET	SIZE
STR-DWG-123	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

Stainless steel 316 tube 15.88 OD x 1.24 wall (5/8 x 0.049 in); flat bar 6 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand