


Trainings ▾

Voltage Check

⚠ CAUTION ⚠

To avoid damage to the ECM, connect only one wire to the fuel shut off solenoid.

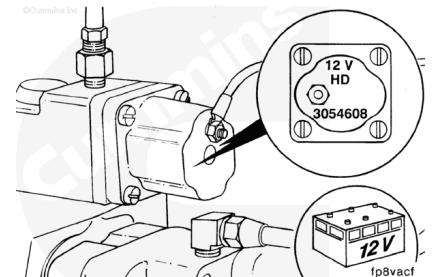

Connect the wire. Make sure the shutoff valve coil is the correct voltage.

The coil voltage and part number are cast into the terminal connection end of the coil.

Turn the vehicle keyswitch to the ON position.

Check the voltage to the coil with a multimeter, Part Number 3377161, or equivalent.

The voltage **must** be the same as the battery voltage.

Turn the vehicle key switch to the OFF position.

