



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Secondary air slot 150 x 20 through the plate and plug	2026-10-02	AC

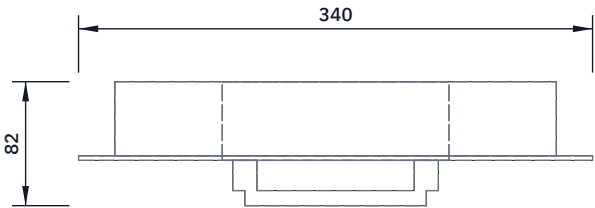


TOP VIEW

Scale 1:5; looking down (along -Z)

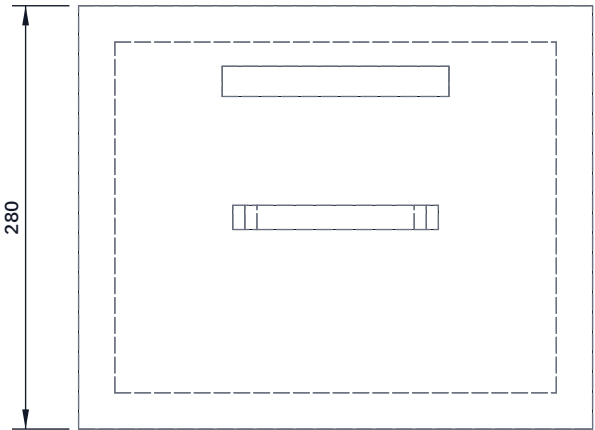


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

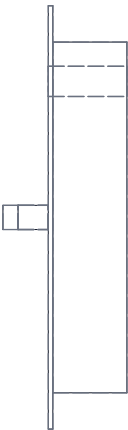

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

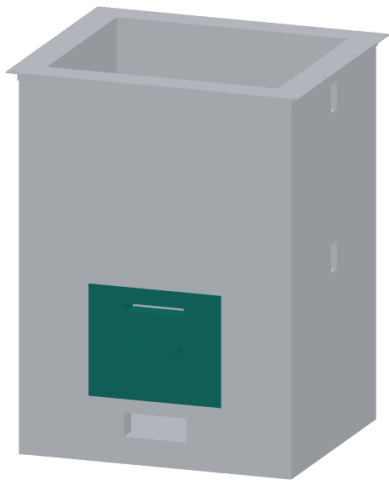

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Door plate 340 wide x 280 tall, 3 mm: it laps the 300 x 240 opening by 20 all round.

Plug: 49 mm fibre board 292 x 232, screwed to the inside of the plate with stainless screws and washers, centred, so it sits 4 inside the opening all round when the door is shut.

Handle: 16 mm round bar 120 long on two 20 mm standoffs, centred.

Secondary air slot: 150 wide x 20 tall through plate and plug, centred, its bottom 200 above the door's bottom edge (above the fire bed); its slide is on sketch 124.

Hinges: two weld-on lift-off hinges on the right edge, 40 in from top and bottom; weld the shell leaves with the door held shut.

Latch: a turn latch on the left edge with a keeper welded to the shell.

Fit: the door closes onto 12 mm ceramic rope glued round the opening.

Check: the door shuts on the rope all round; the plug clears the lining by about 4 mm.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot firebox door: making sketch

DRAWING NO.

STR-DWG-106

REV

P2

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:5

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

Mild steel sheet 3 mm; 46 mm fibre board; 16 mm bar