

Fault Code: 1323


Analog Input Signal Circuit for Load Govern Kilowatt Setpoint - Voltage Above Normal or Shorted to Low Source

 Printable Version

Overview

Codes	Reason	Effect
Fault Code: 1323 PID(P): SPN: FMI: Lamp: Warning SRT:	The analog input signal for the load governed Kilowatt set point is shorted low.	No effect in performance.

©Cummins Inc

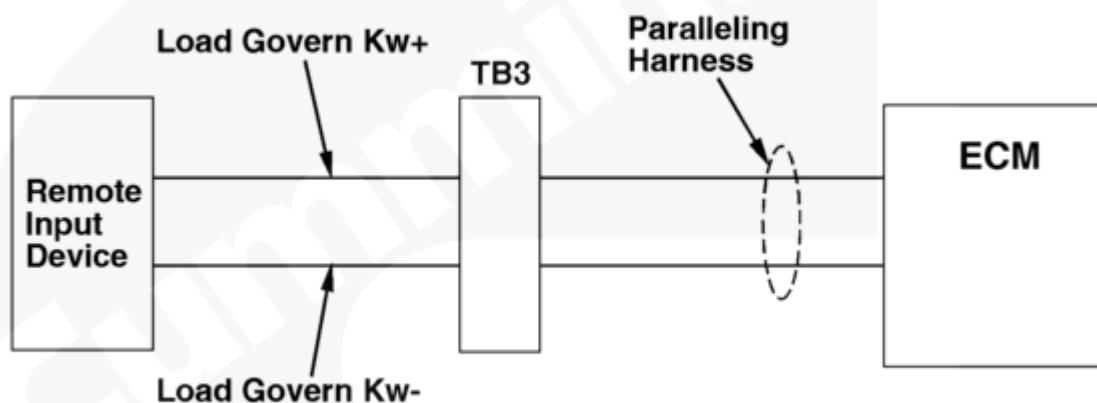

19802902

Load Govern Kilowatt Setpoint - Remote Input Device Circuit

Circuit Description

The load govern kilowatt setpoint analog input signal is an external input into the engine control module used for load governing of the engine/generator set. The load govern kilowatt setpoint analog input signal is sent to the engine control module from the remote input device.

The engine control module monitors the voltage on the load govern kilowatt setpoint analog input SIGNAL pin and expects to see a voltage vary between 0.5 and 4.5-VDC during normal engine operation. This fault can trip, however, even if the generator set is **not** paralleled.

Low voltage will trip Fault Code 1323 and can be caused by shorts in the SIGNAL wire, an open in the signal, or a failed input device.

Component Location

Reference Section E for location of the engine control module card cage.

Reference the customer/facility/installation documentation for the location of the remote input device.

Shoptalk

The possible failure modes are open circuit, short to ground, and failed input device.

Check input voltage with the electronic service tool.

The remote input device **must** be set up to provide a 0 to 5-VDC signal. If this device is set up to provide a 0 to 24-VDC signal, you **must** disable the load govern range checking setpoint using the electronic service tool.

Refer to Troubleshooting Fault Code t05-1323. (</qs3/pubsys2/xml/en/procedures/01/01-t05-1323.html>)