




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

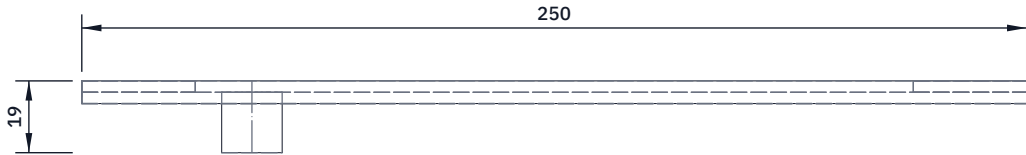


TOP VIEW
Scale 1:2; looking down (along -Z)

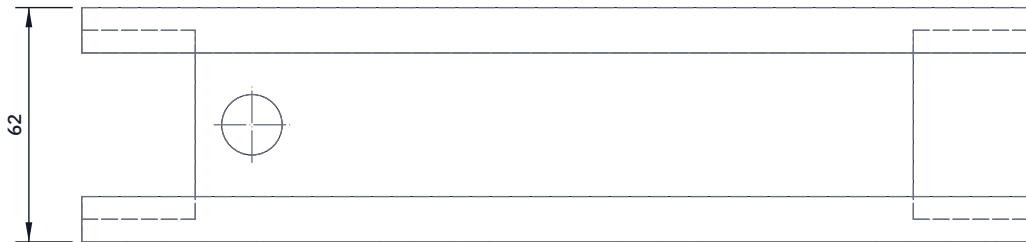

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

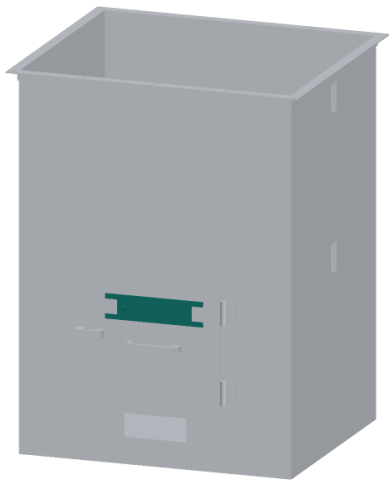

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Slide: 3 mm plate 190 wide x 50 tall with a 16 mm knob at the left.

Guides: two strips 250 long built from 3 mm bar and a 3 mm lip, welded to the outside of the door plate above and below the secondary air slot, so the slide moves sideways between them.

The slot is 150 x 20; the slide covers it with 15 to spare.

Loose fit, about 1 mm: it must move by hand when hot (gloves).

Secondary air enters above the fire bed and burns the gases off the wood; the primary slide sets the burning rate.

Check: the slide shuts the slot; the door still closes and latches.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot secondary air damper slide and guides: making sketch

DRAWING NO. STR-DWG-124			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Mild steel sheet 3 mm; flat bar 3 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	