



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary general arrangement, TRL 3	2026-09-25	AC
P2	200 mm wheels, 150 mm arms, two-stage drive (SCM-DDR-002)	2026-09-25	AC




TOP VIEW
Scale 1:20

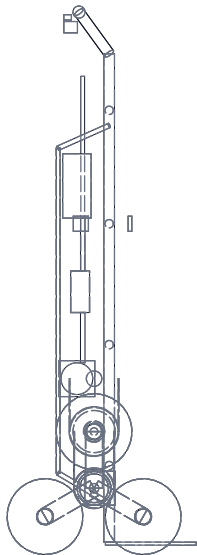


FRONT VIEW
Scale 1:20

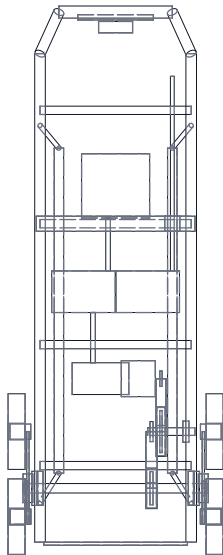

RIGHT VIEW
Scale 1:20

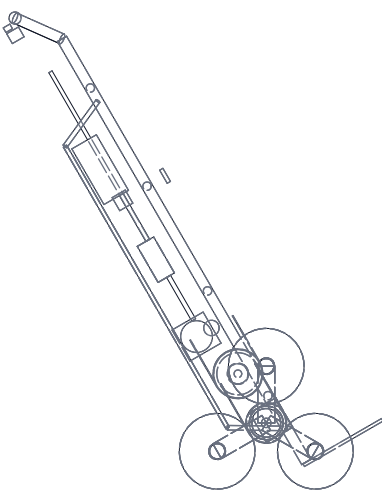

FRONT VIEW, CLIMBING POSE
Tilted 30 deg about the shaft; scale 1:20

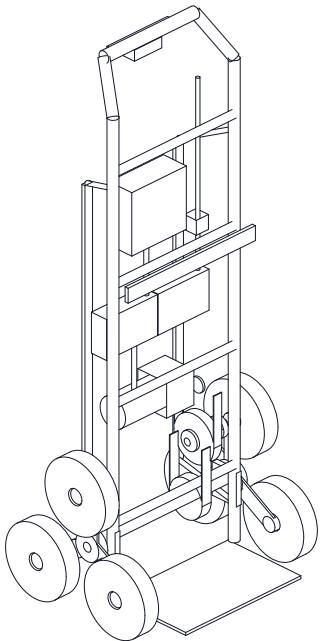

ISOMETRIC VIEW
Not to scale

KEY DIMENSIONS AND INTERFACES (MM)

Overall width 569 (wheel outer faces); upright height 1451
Clusters: arm 150, wheel dia 200, spacing 259.8
Shaft 25 dia at 175.0 above floor; bearings 400 + 28 apart
Cluster mid-planes 524 apart; rails 400 apart, 28 tube
Drive 06B 10T:35T then 08B 10T:20T (7:1)
Countershaft 150 and gearmotor 290 above the shaft, along the frame
Shaft sprocket OD 88; guard radius 53.9 (limit 54.2, R15 met)
Grip 1260 from the shaft along the frame; toe plate 240 x 380
Pack cradle 75 x 180 x 170, center 800 above shaft
Climbing tilt 30 deg back; tilt window +/-6 deg; 60 kg rated stair load

STEPClimber

General arrangement

DRAWING NO. SCM-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Steel frame and spiders; solid rubber wheels; see bom/bom.csv. Figures from SCM-CAL-001 v0.2					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		